

用途:用于音频功率放大和驱动。


Purpose: AF power amplifier and driver applications.

特点: 饱和压降低, 与 2SC1384(3DA1384) 互补可得 2~3 瓦输出。

Features: Low $V_{CE(sat)}$, 2~3W output in complementary pair with 2SC1384(3DA1384).

极限参数/Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

参数符号 Symbol	数值 Rating	单位 Unit
V_{CBO}	-60	V
V_{CEO}	-50	V
V_{EBO}	-5.0	V
I_C	-1.0	A
I_{CP}	-1.5	A
P_C	1.0	W
T_j	150	$^\circ\text{C}$
T_{stg}	-55~150	$^\circ\text{C}$

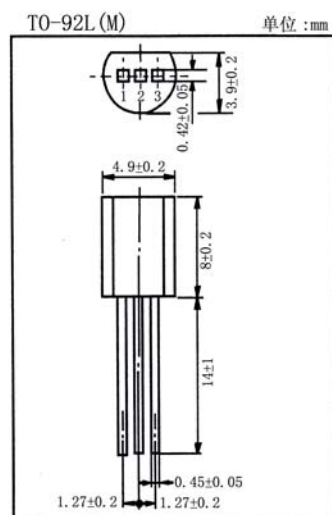

引脚: 1. E 2. C 3. B

电性能参数/Electrical Characteristics($T_a=25^\circ\text{C}$)

参数符号 Symbol	测试条件 Test Condition		数值 Rating			单位 Unit
			最小值 Min	典型值 Typ	最大值 Max	
V_{CBO}	$I_C=-10\mu\text{A}$	$I_E=0$	-60			V
V_{CEO}	$I_C=-2.0\text{mA}$	$I_B=0$	-50			V
V_{EBO}	$I_E=-10\mu\text{A}$	$I_C=0$	-5.0			V
I_{CBO}	$V_{CB}=-20\text{V}$	$I_E=0$			-0.1	μA
$h_{FE(1)}$	$V_{CE}=-10\text{V}$	$I_C=-500\text{mA}$	85	160	340	
$h_{FE(2)}$	$V_{CE}=-5.0\text{V}$	$I_C=-1.0\text{A}$	50	100		
$V_{CE(sat)}$	$I_C=-500\text{mA}$	$I_B=-50\text{mA}$		-0.2	-0.4	V
$V_{BE(sat)}$	$I_C=-500\text{mA}$	$I_B=-50\text{mA}$		-0.85	-1.2	V
f_T	$V_{CE}=-10\text{V}$	$I_C=-50\text{mA}$		200		MHz
C_{ob}	$V_{CB}=-10\text{V}$	$I_E=0$	$f=1.0\text{MHz}$	20	30	pF

$h_{FE(1)}$ 分档/ $h_{FE(1)}$ Classifications: Q: 85~170 R: 120~240 S: 170~340



2SA684 (3CA684)

