


用途:用于音频功率放大和激励。/Purpose: Audio frequency power amplifier and driver.

特点:饱和电压 $V_{CE(sat)}$ 低,可与 2SA719(3CG719) 互补。/Features: Low $V_{CE(sat)}$, complementary pair with 2SA719(3CG719).

极限参数/Absolute maximum ratings ($T_a=25^\circ\text{C}$)

参数符号 Symbol	数值 Rating	单位 Unit
V_{CBO}	30	V
V_{CEO}	25	V
V_{EBO}	7.0	V
I_C	500	mA
I_{CP}	1.0	A
P_C	625	mW
T_j	150	$^\circ\text{C}$
T_{stg}	-55~150	$^\circ\text{C}$

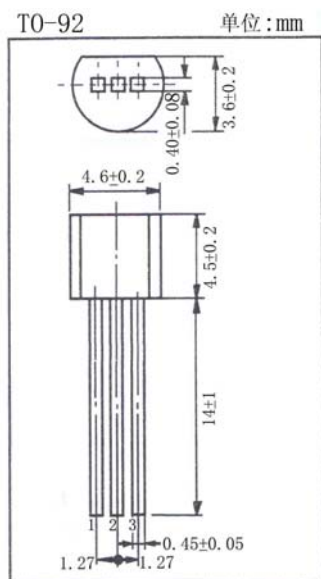

引脚: 1. E 2. C 3. B

电性能参数/Electrical characteristics ($T_a=25^\circ\text{C}$)

参数符号 Symbol	测试条件 Test condition		数值 Rating			单位 Unit
			最小值 Min	典型值 Typ	最大值 Max	
V_{CBO}	$I_C=10\ \mu\text{A}$	$I_E=0$	30			V
V_{CEO}	$I_C=10\text{mA}$	$I_B=0$	25			V
V_{EBO}	$I_E=10\ \mu\text{A}$	$I_C=0$	7.0			V
I_{CBO}	$V_{CB}=20\text{V}$	$I_E=0$			0.1	μA
$h_{FE(1)}$	$V_{CE}=10\text{V}$	$I_C=150\text{mA}$	85	160	340	
$h_{FE(2)}$	$V_{CE}=10\text{V}$	$I_C=500\text{mA}$	40	90		
$V_{CE(sat)}$	$I_C=300\text{mA}$	$I_B=30\text{mA}$		0.35	0.6	V
$V_{BE(sat)}$	$I_C=300\text{mA}$	$I_B=30\text{mA}$		1.1	1.5	V
f_T	$V_{CE}=10\text{V}$	$I_C=50\text{mA}$		200		MHz
C_{ob}	$V_{CB}=10\text{V}$	$I_E=0$	$f=1.0\text{MHz}$	6.0	15	pF

$h_{FE(1)}$ 分档/ $h_{FE(1)}$ classifications: Q:85~170 R:120~240 S:170~340

