


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- Thin Fine Pitch Small Package.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRC157F	10	47
KRC158F	22	47
KRC159F	47	22

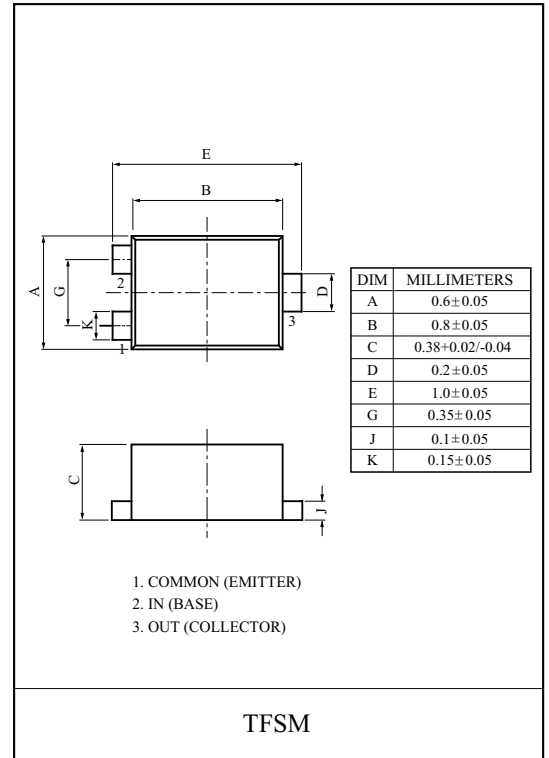


MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC157F~159F	V_O	20	V
Input Voltage	KRC157F	V_I	10/-6	V
	KRC158F		10/-7	
	KRC159F		10/-15	
Output Current	KRC157F~159F	I_O	50	mA
Power Dissipation		P_D	50	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

MARK SPEC

TYPE	KRC157F	KRC158F	KRC159F
MARK	FG	FH	FI

Marking




KRC157F~KRC159F

ELECTRICAL CHARACTERISTICS (Ta=25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC157F~159F	$I_{O(OFF)}$	$V_O=20V, V_I=0$	-	-	500	nA
DC Current Gain	KRC157F	G_I	$V_O=5V, I_O=10mA$	120	-	-	
	KRC158F			120	-	-	
	KRC159F			100	-	-	
Output Voltage	KRC157F~159F	$V_{O(ON)}$	$I_O=5mA, I_I=0.25mA$	-	-	0.15	V
Input Voltage (ON)	KRC157F	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	-	1.5	V
	KRC158F			-	-	2.2	
	KRC159F			-	-	5.0	
Input Voltage (OFF)	KRC157F	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	0.5	-	-	V
	KRC158F			0.6	-	-	
	KRC159F			1.3	-	-	
Input Current	KRC157F	I_I	$V_I=5V$	-	-	0.88	mA
	KRC158F			-	-	0.36	
	KRC159F			-	-	0.16	

KRC157F~KRC159F


$I_O - V_{I(ON)}$

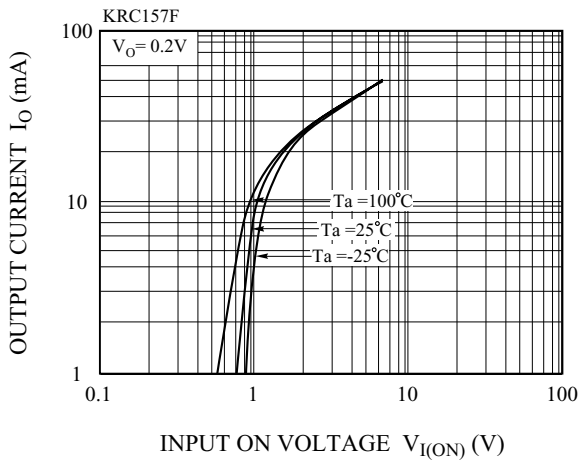


$I_O - V_{I(OFF)}$

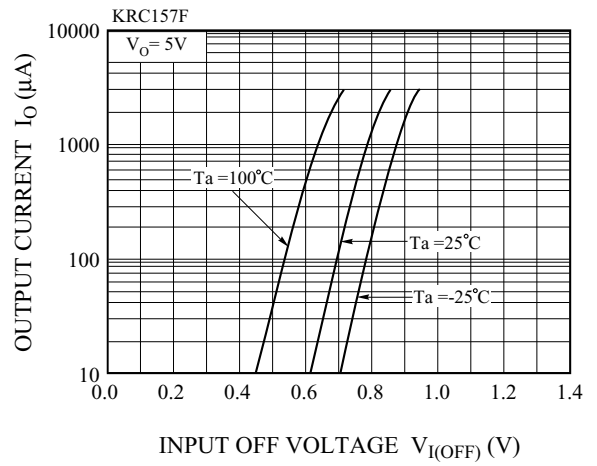


$G_I - I_O$

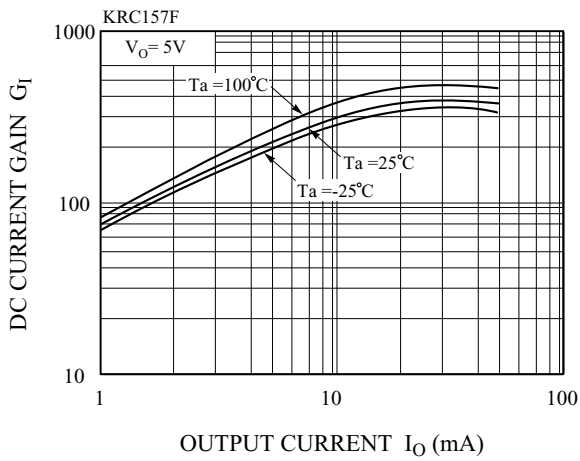


$V_{O(ON)} - I_O$

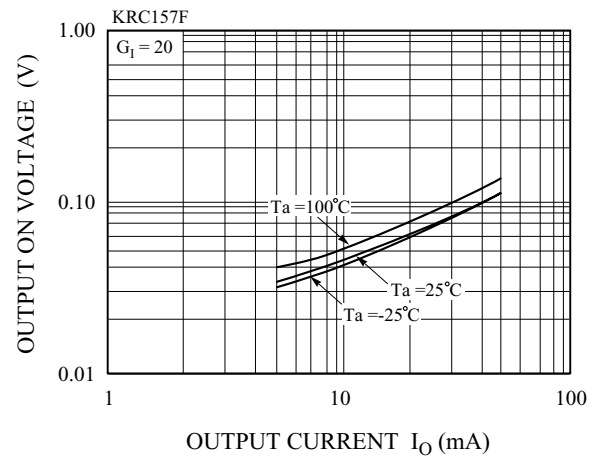

$I_O - V_{I(ON)}$

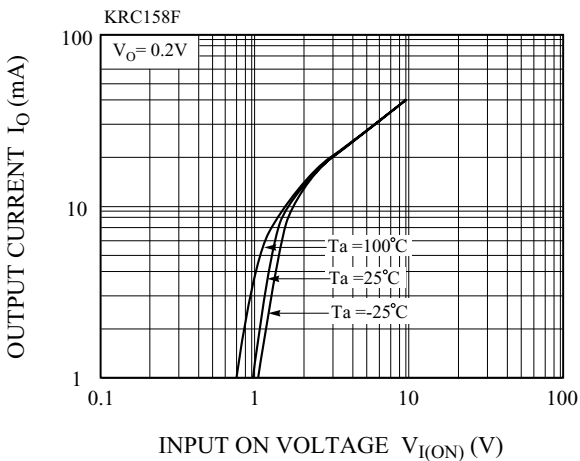


$I_O - V_{I(OFF)}$

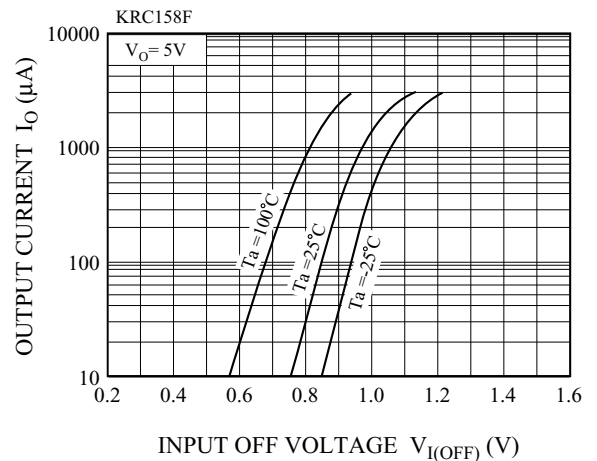


KRC157F~KRC159F


$G_I - I_O$

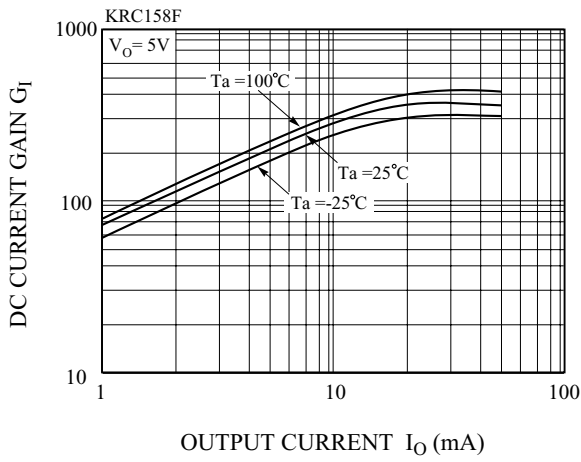


$V_{O(ON)} - I_O$

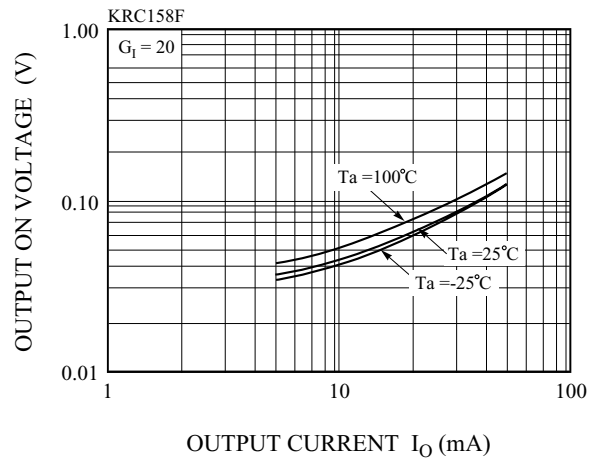


$I_O - V_{I(ON)}$

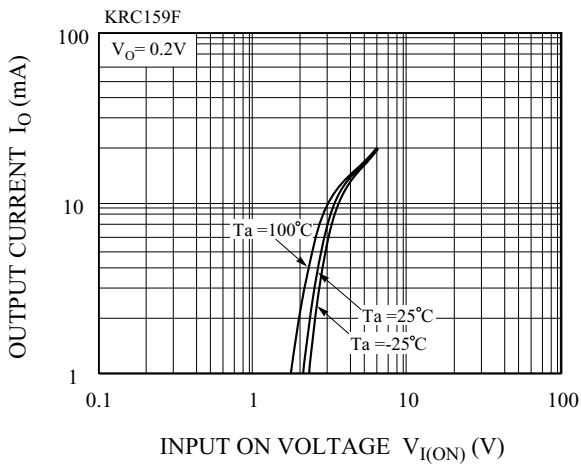

$I_O - V_{I(OFF)}$

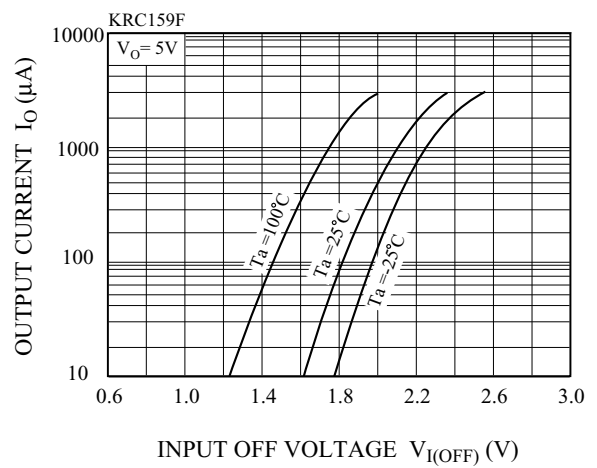

$G_I - I_O$

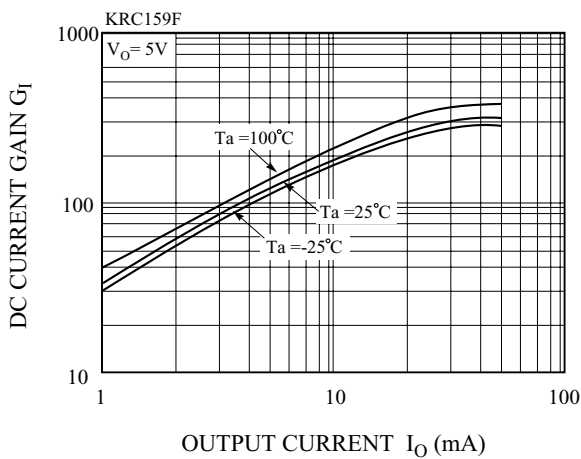

$V_{O(ON)} - I_O$

