



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

SURFACE MOUNT

P-Channel Enhancement Mode Field Effect Transistor
VOLTAGE 50 Volts CURRENT 0.13 Ampere

CHT84WGP

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.

FEATURE

- * Small surface mounting type. (SC-70/SOT-323)
- * High density cell design for low R_{DSON}.
- * Suitable for high packing density.
- * Rugged and reliable.
- * High saturation current capability.
- * Voltage controlled small signal switch.


CONSTRUCTION

- * P-Channel Enhancement


MARKING

- * AW

CIRCUIT



SC-70/SOT-323

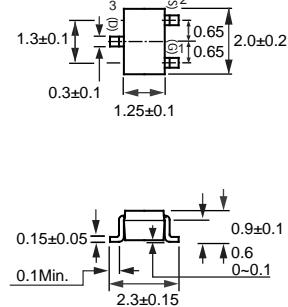

Dimensions in millimeters

SC-70/SOT-323

Absolute Maximum Ratings

T_A = 25°C unless otherwise noted

Symbol	Parameter	CHT84WGP	Units
V _{DSS}	Drain-Source Voltage	-50	V
V _{GSS}	Gate-Source Voltage - Continuous	±20	V
I _D	Maximum Drain Current - Continuous	-0.13	A
P _D	Maximum Power Dissipation	200	mW
T _J , T _{STG}	Operating and Storage Temperature Range	-55 to 150	°C

Thermal characteristics

R _{θJA}	Thermal Resistance, Junction-to-Ambient	625	°C/W
------------------	---	-----	------

2004-03

RATING CHARACTERISTIC CURVES (CHT84WGP)

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = -250 \mu\text{A}$	-50	-75		V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -50 \text{ V}, V_{GS} = 0 \text{ V}$			-15	μA
		$V_{DS} = -25 \text{ V}, V_{GS} = 0 \text{ V}$			-100	nA
I_{GSSF}	Gate - Body Leakage, Forward	$V_{GS} = 20 \text{ V}, V_{DS} = 0 \text{ V}$			10	nA
I_{GSSR}	Gate - Body Leakage, Reverse	$V_{GS} = -20 \text{ V}, V_{DS} = 0 \text{ V}$			-10	nA

ON CHARACTERISTICS (Note 1)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 1.0 \text{ mA}$	-0.8	-1.6	-2.0	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS} = -5.0 \text{ V}, I_D = 0.1 \text{ A}$		6	10	Ω
g_{FS}	Forward Transconductance	$V_{DS} = -25 \text{ V}, I_D = 100 \text{ mA}$	0.05			S

DYNAMIC CHARACTERISTICS

C_{iss}	Input Capacitance	$V_{DS} = -25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$			45	pF
C_{oss}	Output Capacitance				25	
C_{rss}	Reverse Transfer Capacitance				12	
t_{on}	Turn-On Time	$V_{DD} = -30 \text{ V}$ $I_D = -270 \text{ mA}, V_{GS} = -10 \text{ V}, R_{GEN} = 50 \Omega$		10		nS
	Turn-Off Time			18		

RATING CHARACTERISTIC CURVES (CHT84WGP)

Typical Electrical Characteristics

Figure 1. On-Region Characteristics

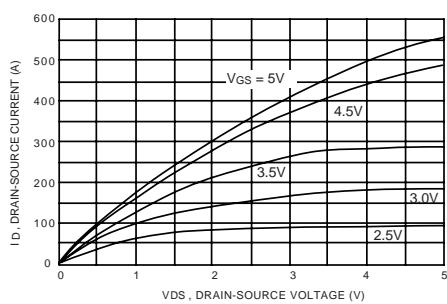


Figure 2. On-Resistance Variation with Temperature

