


CGHV27100

100 W, 2500-2700 MHz, 50 V, GaN HEMT for LTE

Cree's CGHV27100 is a gallium nitride (GaN) high electron mobility transistor (HEMT) is designed specifically for high efficiency, high gain and wide bandwidth capabilities, which makes the CGHV27100 ideal for 2.5 - 2.7 GHz LTE, 4G Telecom and BWA amplifier applications. The transistor is input matched and supplied in a ceramic/metal pill and flange packages.

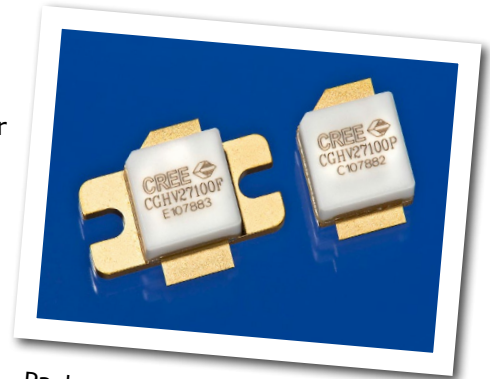

Package Type: 440162 and 440161
PN: CGHV27100F and CGHV27100P

Typical Performance Over 2.5 - 2.7 GHz ($T_c = 25^\circ\text{C}$) of Demonstration Amplifier

Parameter	2.5 GHz	2.6 GHz	2.7 GHz	Units
Gain @ 44 dBm	18.1	18.0	17.9	dB
ACLR @ 44 dBm	-37.0	-37.0	-37.0	dBc
Drain Efficiency @ 44 dBm	34.0	33.5	32.0	%

Note:

Measured in the CGHV27100-TB amplifier circuit, under WCDMA 3GPP test model 1, 64 DPCH, 45% clipping, PAR = 7.5 dB @ 0.01% Probability on CCDF, $V_{DD} = 50\text{ V}$, $I_{DS} = 500\text{ mA}$.

Features



- 2.5 - 2.7 GHz Operation
- 18.0 dB Gain
- -37 dBc ACLR at 25 W P_{AVE}
- 33 % Efficiency at 25 W P_{AVE}
- High Degree of DPD Correction Can be Applied



Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	V_{DSS}	125	Volts	25 °C
Gate-to-Source Voltage	V_{GS}	-10, +2	Volts	25 °C
Storage Temperature	T_{STG}	-65, +150	°C	
Operating Junction Temperature	T_J	225	°C	
Maximum Forward Gate Current	I_{GMAX}	16	mA	25 °C
Maximum Drain Current ¹	I_{DMAX}	6	A	25 °C
Soldering Temperature ²	T_S	245	°C	
Screw Torque	τ	80	in-oz	
Thermal Resistance, Junction to Case ³	$R_{\theta JC}$	2.34	°C/W	85 °C, $P_{DISS} = 48$ W
Thermal Resistance, Junction to Case ⁴	$R_{\theta JC}$	2.95	°C/W	85 °C, $P_{DISS} = 48$ W
Case Operating Temperature ⁵	T_C	-40, +150	°C	

Note:

¹ Current limit for long term, reliable operation.

² Refer to the Application Note on soldering at <http://www.cree.com/rf/document-library>

³ Measured for the CGHV27100P

⁴ Measured for the CGHV27100F

⁵ See also, the Power Dissipation De-rating Curve on Page 5.

Electrical Characteristics ($T_C = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics¹						
Gate Threshold Voltage	$V_{GS(th)}$	-3.8	-3.0	-2.3	V_{DC}	$V_{DS} = 10$ V, $I_D = 16$ mA
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.7	-	V_{DC}	$V_{DS} = 50$ V, $I_D = 500$ mA
Saturated Drain Current ²	I_{DS}	12	14.4	-	A	$V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V
Drain-Source Breakdown Voltage	V_{BR}	150	-	-	V_{DC}	$V_{GS} = -8$ V, $I_D = 16$ mA
RF Characteristics⁵ ($T_C = 25^\circ\text{C}$, $F_0 = 2.7$ GHz unless otherwise noted)						
Saturated Output Power ^{3,4}	P_{SAT}	-	135	-	W	$V_{DD} = 50$ V, $I_{DQ} = 500$ mA
Pulsed Drain Efficiency ^{3,4}	η	-	68	-	%	$V_{DD} = 50$ V, $I_{DQ} = 500$ mA, $P_{OUT} = P_{SAT}$
Gain ⁶	G	-	18	-	dB	$V_{DD} = 50$ V, $I_{DQ} = 500$ mA, $P_{OUT} = 44$ dBm
WCDMA Linearity ⁶	ACLR	-	-37	-	dBc	$V_{DD} = 50$ V, $I_{DQ} = 500$ mA, $P_{OUT} = 44$ dBm
Drain Efficiency ⁶	η	-	33	-	%	$V_{DD} = 50$ V, $I_{DQ} = 500$ mA, $P_{OUT} = 44$ dBm
Output Mismatch Stress ³	VSWR	-	-	10 : 1	Ψ	No damage at all phase angles, $V_{DD} = 50$ V, $I_{DQ} = 500$ mA, $P_{OUT} = 100$ W Pulsed
Dynamic Characteristics						
Input Capacitance ⁷	C_{GS}	-	66	-	pF	$V_{DS} = 50$ V, $V_{GS} = -8$ V, $f = 1$ MHz
Output Capacitance ⁷	C_{DS}	-	8.7	-	pF	$V_{DS} = 50$ V, $V_{GS} = -8$ V, $f = 1$ MHz
Feedback Capacitance	C_{GD}	-	0.47	-	pF	$V_{DS} = 50$ V, $V_{GS} = -8$ V, $f = 1$ MHz

Notes:

¹ Measured on wafer prior to packaging.

² Scaled from PCM data.

³ Pulse Width = 100 μ s, Duty Cycle = 10%

⁴ P_{SAT} is defined as $I_{GS} = 1.6$ mA peak


⁵ Measured in CGHV27100-TB.

⁶ Single Carrier WCDMA, 3GPP Test Model 1, 64 DPCH, 45% Clipping, PAR = 7.5 dB @ 0.01% Probability on CCDF, $V_{DD} = 50$ V.

⁷ Includes package and internal matching components.


Typical Performance

Figure 1. - Small Signal Gain and Return Losses vs Frequency for the CGHV27100 measured in CGHV27100-TB Amplifier Circuit
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 0.5\text{ A}$

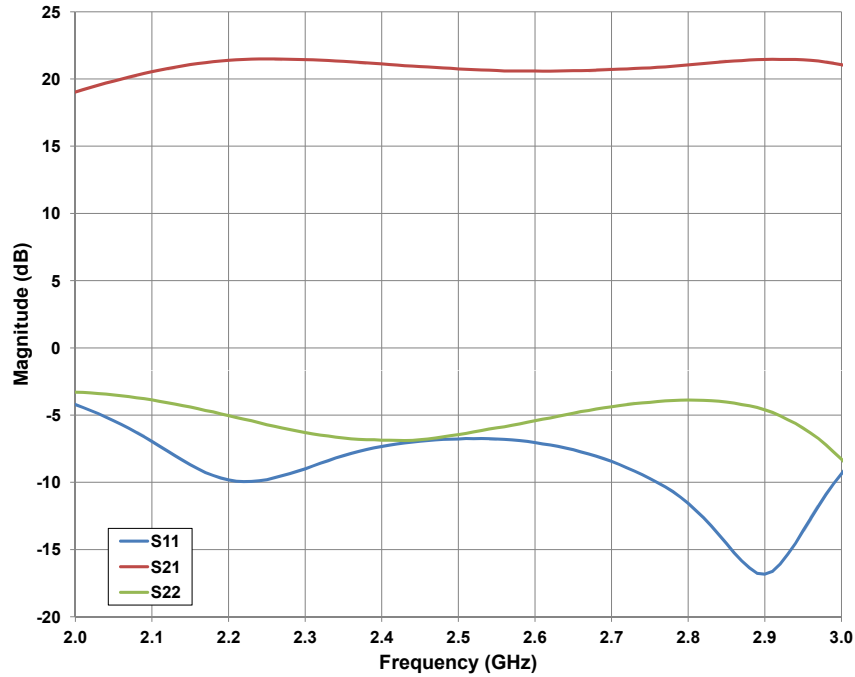

Typical Linear Performance

Figure 2. - Typical Gain, Drain Efficiency and ACLR vs Output Power of the CGHV27100 measured in CGHV27100-TB Amplifier Circuit
 $V_{DS} = 50\text{ V}$, $I_{DS} = 0.5\text{ A}$, 1c WCDMA, PAR = 7.5 dB

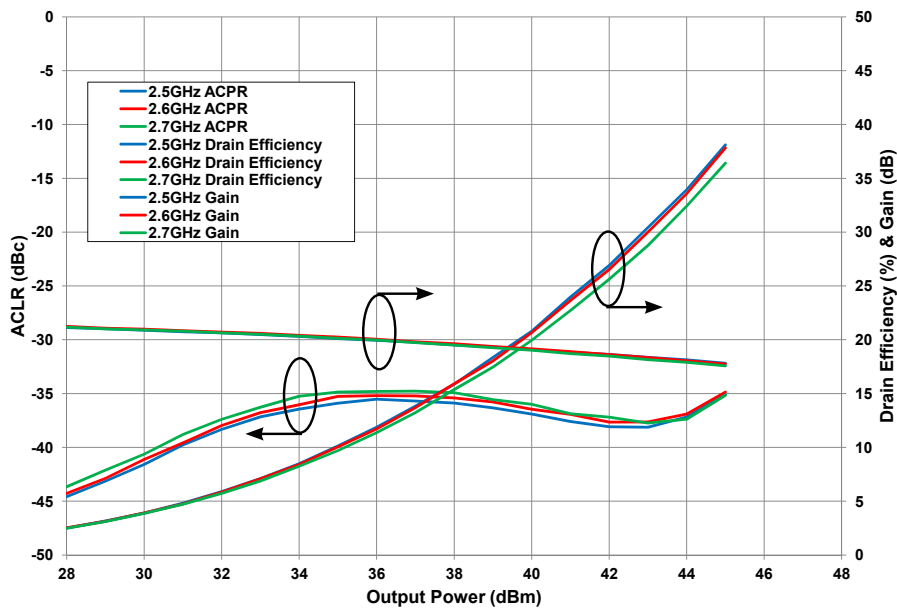

Typical Performance

Figure 3. - Typical Gain, Drain Efficiency and ACLR vs Frequency of the CGHV27100 measured in CGHV27100-TB Amplifier Circuit.

$V_{DS} = 50\text{ V}$, $I_{DS} = 0.5\text{ A}$, $P_{AVE} = 25\text{ W}$, 1c WCDMA, PAR = 7.5 dB



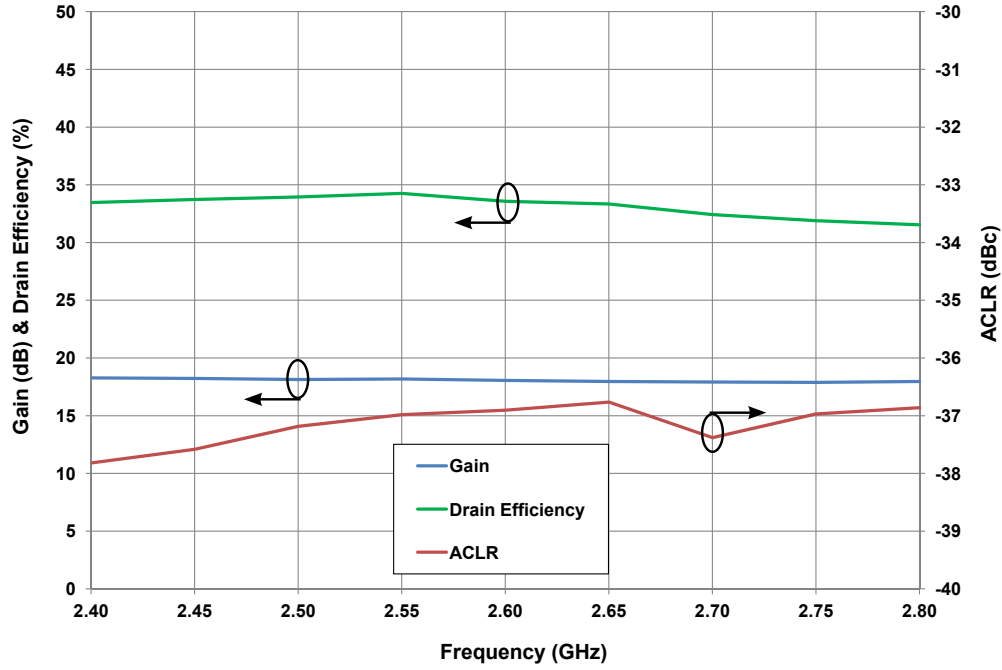


Figure 4. - Typical Two Tone Linearity vs Output Power of the CGHV27100 measured in CGHV27100-TB Amplifier Circuit. $V_{DS} = 50\text{ V}$, $I_{DS} = 0.5\text{ A}$

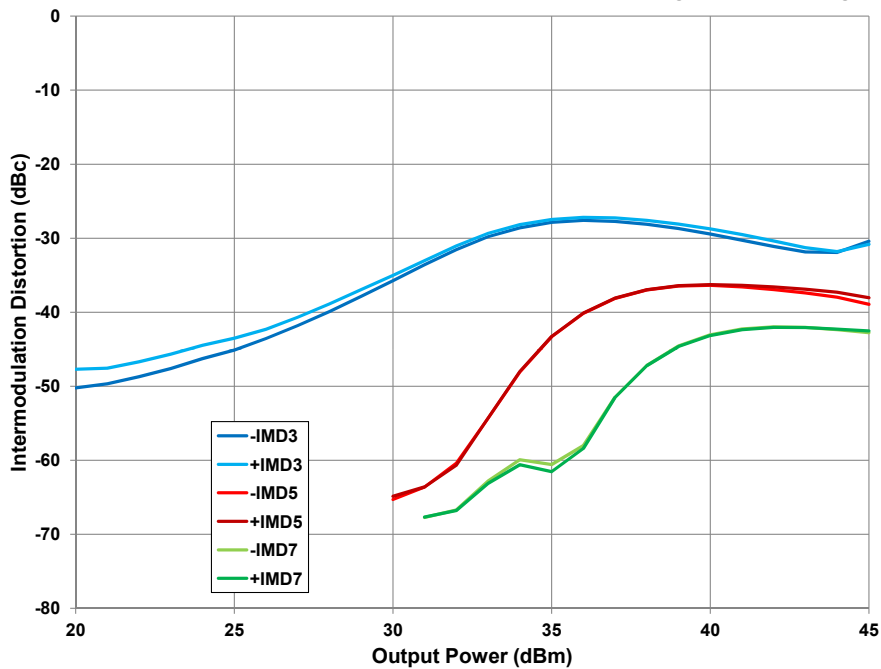


Typical Performance

Figure 5. - Power Dissipation Derating Curve

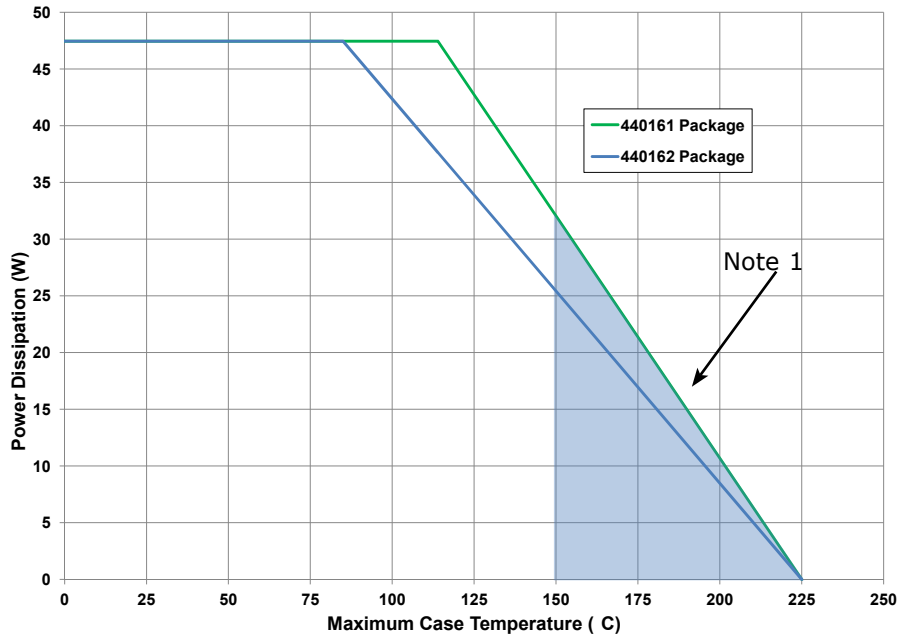

Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2).

Source and Load Impedances

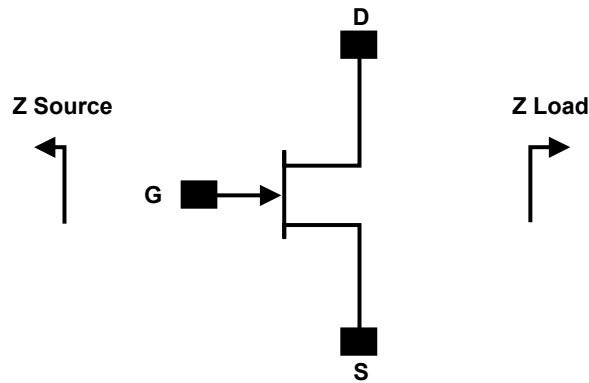

Frequency (MHz)	Z Source	Z Load
2500	4.01 - j3.88	10.69 - j2.86
2600	3.99 - j3.29	11.16 - j3.17
2700	4.01 - j2.72	11.67 - j3.94


Note¹: $V_{DD} = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$. In the 440162 package.

Note²: Impedances are extracted from CGHV27100-TB demonstration circuit and are not source and load pull data derived from transistor.


CGHV27100-TB Demonstration Amplifier Circuit Bill of Materials

Designator	Description	Qty
R1, R2	RES, 10 OHM, +/- 1%, 1/16 W, 0603	2
C1	CAP, 5.6 pF, +/- 0.25 pF, 0603, ATC	1
C2	CAP, 27 pF, +/-5%, 0603, ATC	1
C3	CAP, 10.0 pF, +/-5%, 0603, ATC	1
C8, C13	CAP, 8.2 pF, +/-0.25 pF, 0603, ATC	2
C4, C9, C14	CAP, 470 pF, 5%, 100 V, 0603, X	3
C5, C10, C15	CAP, 33000 pF, 0805, 100 V, X7R	3
C6	CAP, 10 UF, 16 V, TANTALUM	1
C7	CAP, 27 pF, +/-5%, 250 V, 0805, ATC 600 F	1
C11, C16	CAP, 1.0 UF, 100 V, 10%, X7R, 1210	2
C12	CAP, 100 UF, +/-20%, 160 V, ELECTROLYTIC	1
C17	CAP, 33 UF, 20%, ELECTROLYTIC	1
J1, J2	CONN, SMA	2
J3	HEADER RT>PLZ.1CEN LK 9POS	1
	PCB, RO4350, 0.020" THK, CGHV27100F	1
	2-56 SOC HD SCREW 1/4 SS	4
	#2 SPLIT LOCKWASHER SS	4
	CGHV27100F	1


CGHV27100-TB Demonstration Amplifier Circuit

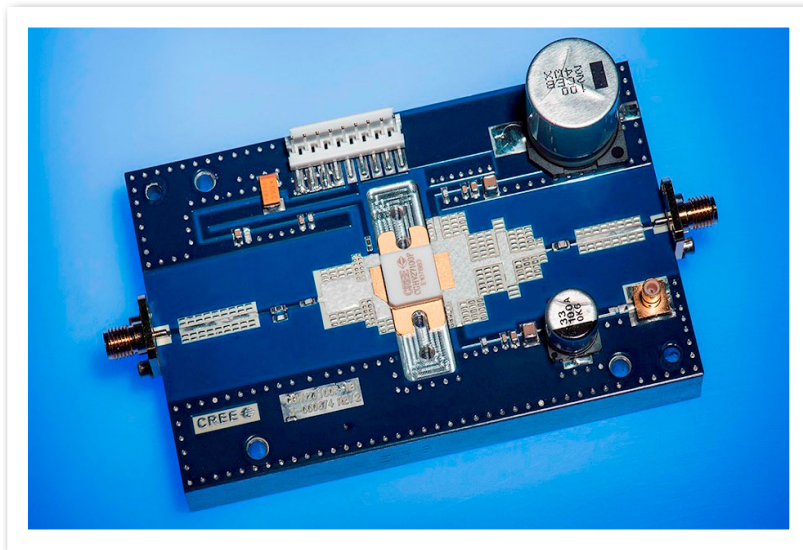


CGHV27100-TB Demonstration Amplifier Circuit Schematic

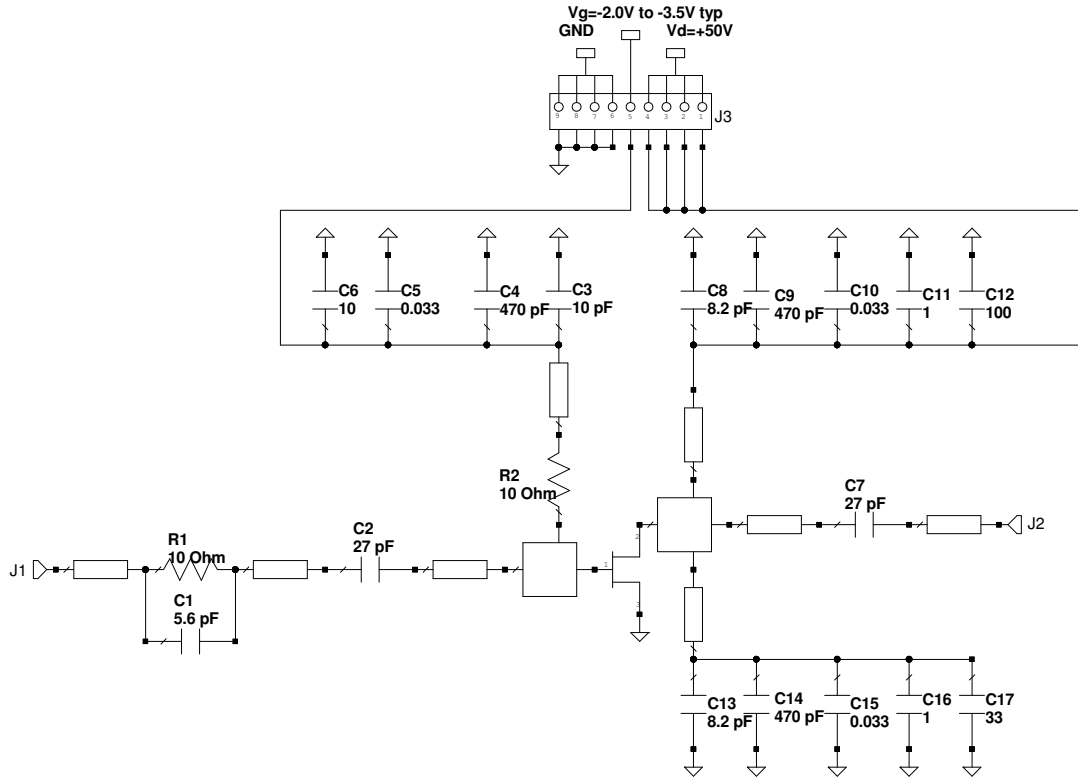

CGHV27100-TB Demonstration Amplifier Circuit Outline

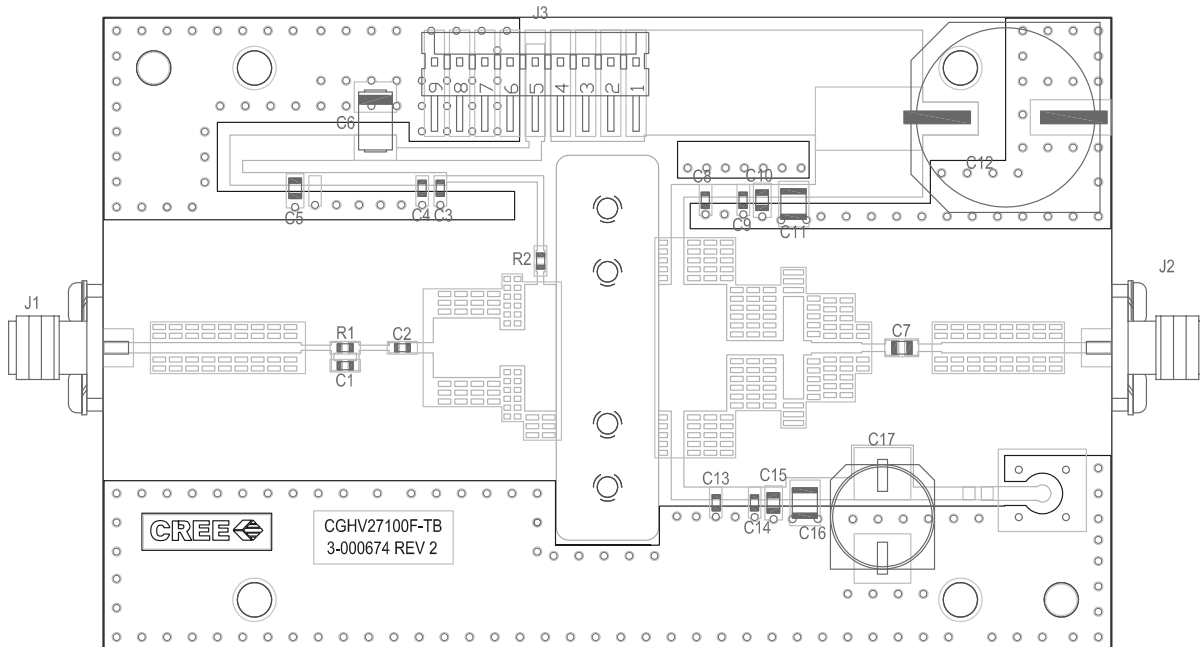

Product Dimensions CGHV27100F (Package Type — 440162)

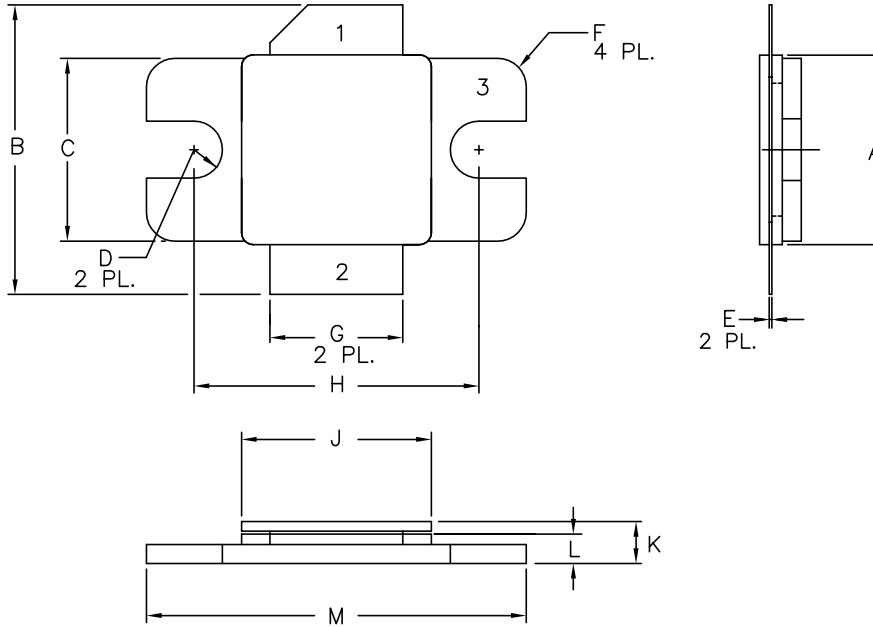


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.395	.405	10.03	10.29
B	.580	.620	14.73	15.75
C	.380	.390	9.65	9.91
D	.055	.065	1.40	1.65
E	.004	.006	0.10	0.15
F	.055	.065	1.40	1.65
G	.275	.285	6.99	7.24
H	.595	.605	15.11	15.37
J	.395	.405	10.03	10.29
K	.129	.149	3.28	3.78
L	.053	.067	1.35	1.70
M	.795	.805	20.19	20.45

PIN 1. GATE
 PIN 2. DRAIN
 PIN 3. SOURCE

Product Dimensions CGHV27100P (Package Type — 440161)

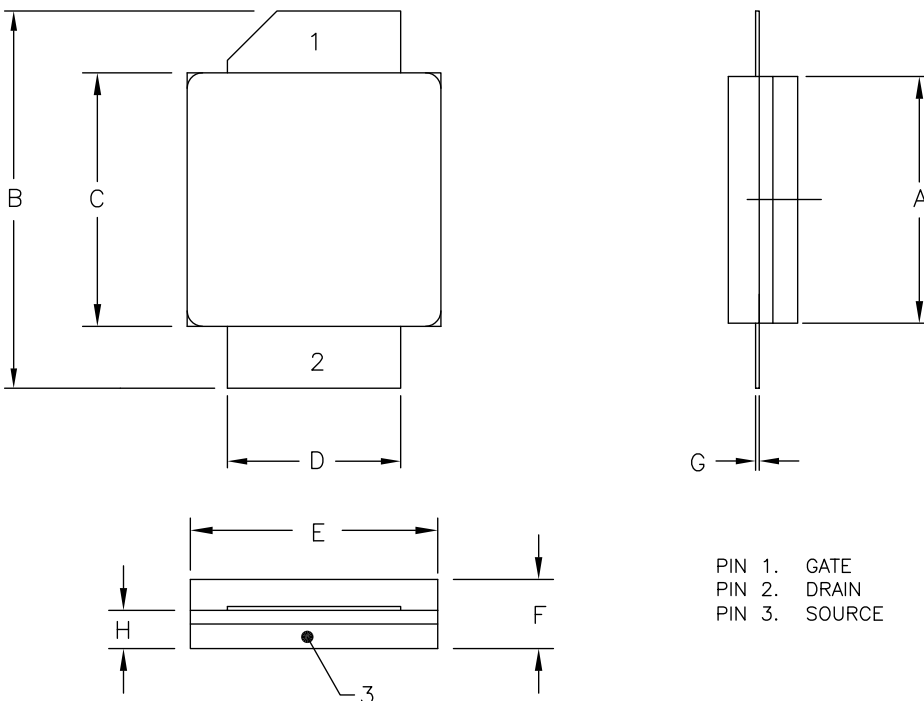

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.395	.407	10.03	10.34
B	.594	.634	15.09	16.10
C	.395	.407	10.03	10.34
D	.275	.285	6.99	7.24
E	.395	.407	10.03	10.34
F	.129	.149	3.28	3.78
G	.004	.006	0.10	0.15
H	.057	.067	1.45	1.70

PIN 1. GATE
 PIN 2. DRAIN
 PIN 3. SOURCE

Part Number System

CGHV27100F

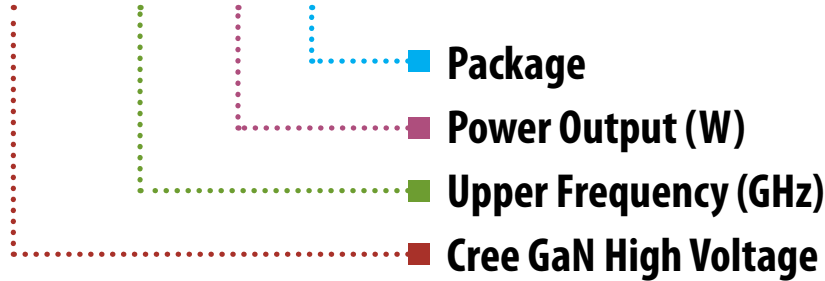

Parameter	Value	Units
Upper Frequency ¹	2.7	GHz
Power Output	100	W
Package	Flange	-

Table 1.

Note¹: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

Table 2.



Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.
4600 Silicon Drive
Durham, North Carolina, USA 27703
www.cree.com/rf

Sarah Miller
Marketing & Export
Cree, RF Components
1.919.407.5302

Ryan Baker
Marketing
Cree, RF Components
1.919.407.7816

Tom Dekker
Sales Director
Cree, RF Components
1.919.407.5639