


## MECHANICAL DATA

Dimensions in mm (inches)

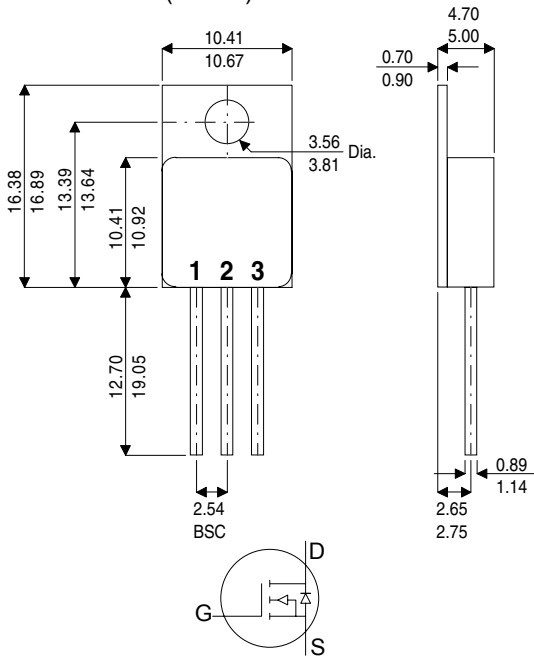

## N-CHANNEL POWER MOSFET FOR HI-REL APPLICATIONS

**$BV_{DSS}$  400V**  
 **$I_D$  8.7A**  
 **$R_{DS(on)}$  0.55Ω**

### FEATURES

- HERMETICALLY SEALED TO-220 METAL PACKAGE
- SIMPLE DRIVE REQUIREMENTS
- ALL LEADS ISOLATED FROM CASE
- LIGHTWEIGHT
- SCREENING OPTIONS AVAILABLE

### TO-220M (TO-257AB)

Pin 1 – Gate Pin 2 – Drain Pin 3 – Source

### ABSOLUTE MAXIMUM RATINGS $T_{CASE} = 25^{\circ}C$ unless otherwise stated

$V_{DS}$	Drain - Source Voltage	400V
$V_{GS}$	Gate - Source Voltage	±20V
$I_D$	Drain Current - Continuous ( $T_C = 25^{\circ}C$ )	8.7A
$I_D$	Drain Current - Continuous ( $T_C = 100^{\circ}C$ )	5.5A
$I_{DM}$	Drain Current - Pulsed <sup>1</sup>	35A
$P_D$	Total Power Dissipation at $T_{case} \leq 25^{\circ}C$	100W
	De-rate Linearly above 25°C	0.8W/°C
$T_j, T_{stg}$	Operating Junction and Storage Temperature Range	-55 to +150°C
$T_L$	Lead Temperature (for 5 sec)	300°C
$R_{thj-case}$	Thermal Resistance Junction - Case	1.25°C/W

NOTES: 1) Pulse Width limited by maximum junction temperature.  
 2) Pulse Test: Pulse Width  $\leq 380\mu S$ , Duty Cycle,  $\delta$  2%

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

## STATIC ELECTRICAL RATINGS (T<sub>case</sub> = 25°C unless otherwise stated)

	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV <sub>DSS</sub>	Drain – Source Breakdown Voltage	V <sub>GS</sub> = 0V I <sub>D</sub> = 1.0mA	400	-	-	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Temperature Coefficient of Breakdown Voltage	Reference to 25°C I <sub>D</sub> = 1.0mA	-	0.46	-	V/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 320V V <sub>GS</sub> = 0V T <sub>J</sub> = 125°C	-	-	25	μA
			-	-	250	
I <sub>GSS</sub>	Gate – Source Leakage Current	V <sub>GS</sub> = ±20V V <sub>DS</sub> = 0V	-	-	±100	nA
V <sub>GS(TH)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> I <sub>D</sub> = 250μA	2.0	-	4.0	V
R <sub>DS(ON)</sub>	Drain – Source On State Resistance	V <sub>GS</sub> = 10V I <sub>D</sub> = 5.5A	-	-	0.55	Ω
		V <sub>GS</sub> = 10V I <sub>D</sub> = 8.7A	-	-	0.63	Ω
g <sub>FS</sub>	Forward Transconductance <sup>2</sup>	V <sub>DS</sub> ≥ 15V I <sub>D</sub> = 5.5A	4.9	-	-	S

## DYNAMIC CHARACTERISTICS

C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 25V f = 1.0MHz V <sub>GS</sub> = 0V	-	1400	-	pF
C <sub>oss</sub>	Output Capacitance		-	350	-	
C <sub>rss</sub>	Reverse Transfer Capacitance		-	230	-	
Q <sub>g</sub>	Total Gate Charge <sup>2</sup>	V <sub>DS</sub> = 200V V <sub>GS</sub> = 10V I <sub>D</sub> = 8.7A	-	-	65	nC
Q <sub>gs</sub>	Gate – Source Charge <sup>2</sup>		-	-	10	
Q <sub>gd</sub>	Gate – Drain Charge <sup>2</sup>		-	-	40.5	
T <sub>d(on)</sub>	Turn-On Delay	V <sub>DD</sub> = 200V R <sub>G</sub> = 9.1Ω I <sub>D</sub> = 8.7A V <sub>GS</sub> = 10V	-	-	25	ns
t <sub>r</sub>	Rise Time		-	-	92	
T <sub>d(off)</sub>	Turn-Off Delay Time		-	-	79	
t <sub>f</sub>	Fall Time		-	-	58	

## SOURCE – DRAIN DIODE RATINGS AND CHARACTERISTICS

I <sub>S</sub>	Continuous Source Current (MAX)		-	-	8.7	A
I <sub>SM</sub>	Pulsed Source Current (MAX)		-	-	35	
V <sub>SD</sub>	Diode Forward Voltage <sup>2</sup>	V <sub>GS</sub> = 0V I <sub>S</sub> = 8.7A	-	-	1.5	V
t <sub>rr</sub>	Reverse Recovery Time <sup>2</sup>	V <sub>GS</sub> = 0V I <sub>S</sub> = 8.7A	-	-	600	ns
Q <sub>rr</sub>	Reverse Recovery Charge <sup>2</sup>	di/dt = 100A/μs V <sub>DD</sub> ≤ 50V	-	-	5.6	μC
T <sub>on</sub>	Forward Turn-On Time		Negligible			

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.