

ULTRA-HIGH SPEED SWITCHING APPLICATIONS
ANALOG SWITCH APPLICATIONS


FEATURES

- 2.5 Gate Drive.
- Low Threshold Voltage : $V_{th}=0.5 \sim 1.5V$.
- High Speed.
- Small Package.
- Enhancement-Mode.

MAXIMUM RATING (Ta=25 °C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---------------------------|-----------|-----------|------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GSS} | ± 20 | V |
| DC Drain Current | I_D | 200 | mA |
| Drain Power Dissipation | P_D | 200 | mW |
| Channel Temperature | T_{ch} | 150 | |
| Storage Temperature Range | T_{stg} | -55 ~ 150 | |


EQUIVALENT CIRCUIT




THIS TRANSISTOR IS ELECTROSTATIC SENSITIVE DEVICE.
PLEASE HANDLE WITH CAUTION.

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|---------------|--------------------------------------|------|------|---------|---------|
| Gate Leakage Current | I_{GSS} | $V_{GS} = \pm 16V, V_{DS} = 0V$ | - | - | ± 1 | μA |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $I_D = 100 \mu A, V_{GS} = 0V$ | 30 | - | - | V |
| Drain Cut-off Current | I_{DSS} | $V_{DS} = 30V, V_{GS} = 0V$ | - | - | 1 | μA |
| Gate Threshold Voltage | V_{th} | $V_{DS} = 3V, I_D = 0.1mA$ | 0.5 | - | 1.5 | V |
| Forward Transfer Admittance | $ Y_{fs} $ | $V_{DS} = 3V, I_D = 50mA$ | 100 | - | - | mS |
| Drain-Source ON Resistance | $R_{DS(ON)}$ | $I_D = 50mA, V_{GS} = 2.5V$ | - | 1.2 | 2 | |
| Input Capacitance | C_{iss} | $V_{DS} = 3V, V_{GS} = 0V, f = 1MHz$ | - | 70 | - | pF |
| Reverse Transfer Capacitance | C_{rss} | $V_{DS} = 3V, V_{GS} = 0V, f = 1MHz$ | - | 23 | - | pF |
| Output Capacitance | C_{oss} | $V_{DS} = 3V, V_{GS} = 0V, f = 1MHz$ | - | 58 | - | pF |
| Switching Time | Turn-on Time | t_{on} | - | 60 | - | nS |
| | Turn-off Time | t_{off} | - | 120 | - | nS |

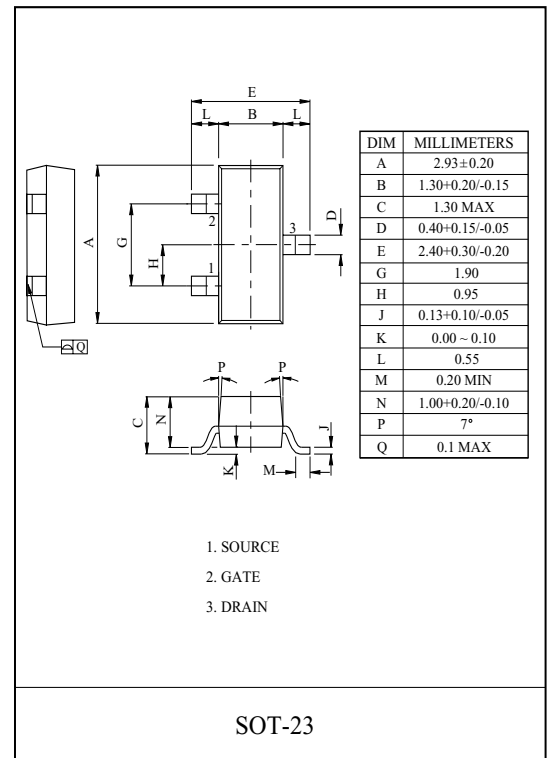


Marking

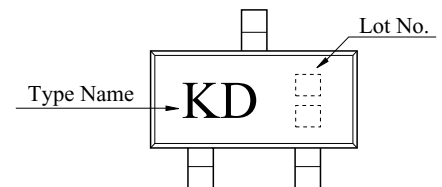


KTK5134S


$I_D - V_{DS}$

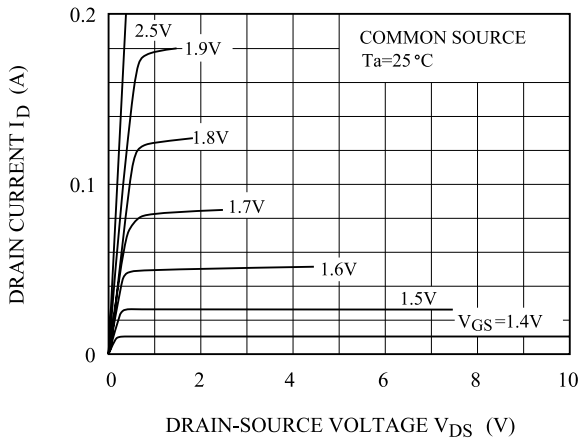


$I_D - V_{DS}$
(LOW VOLTAGE REGION)

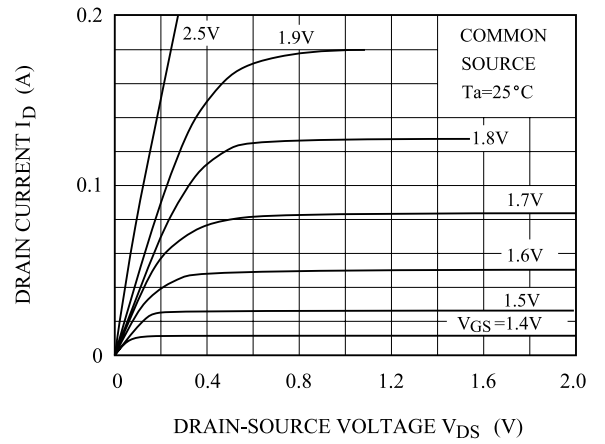


$I_{DR} - V_{DS}$

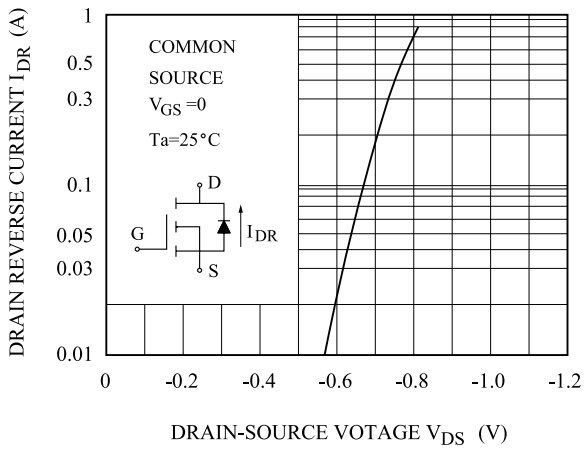


$I_D - V_{GS}$

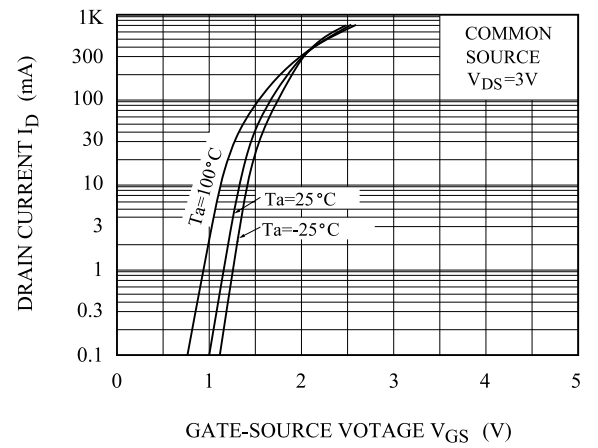


$|Y_{fs}| - I_D$

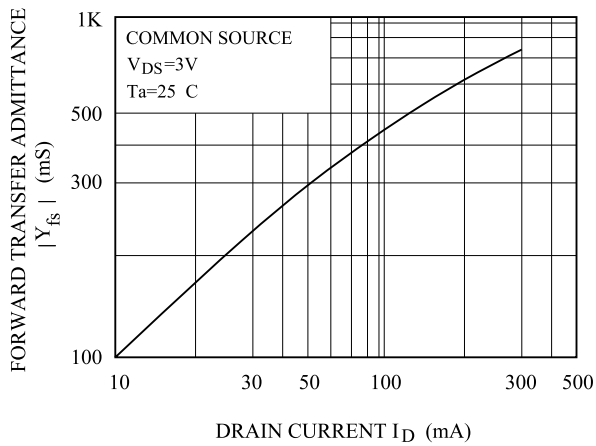


$C - V_{DS}$

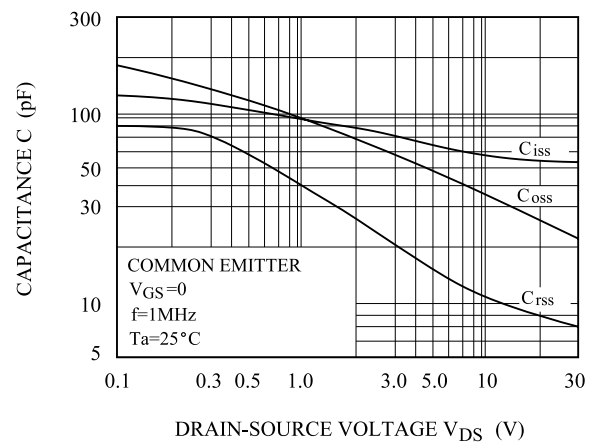


$V_{DS(ON)} - I_D$

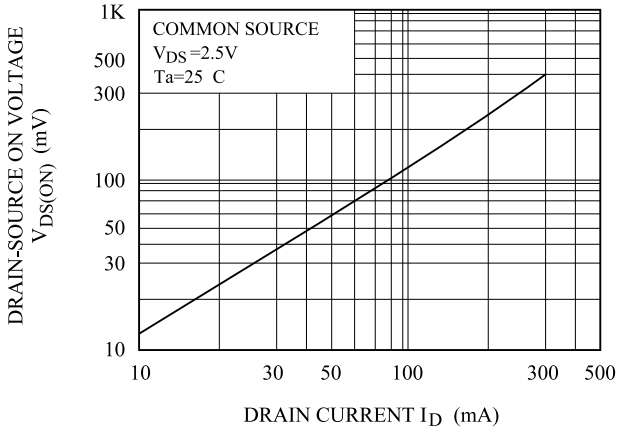

$t - I_D$

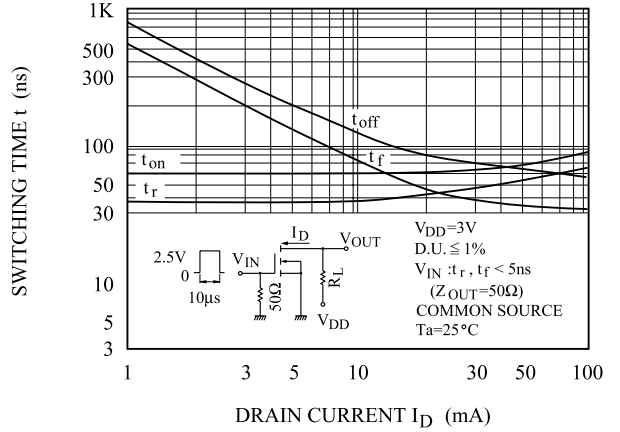

$P_D - T_a$

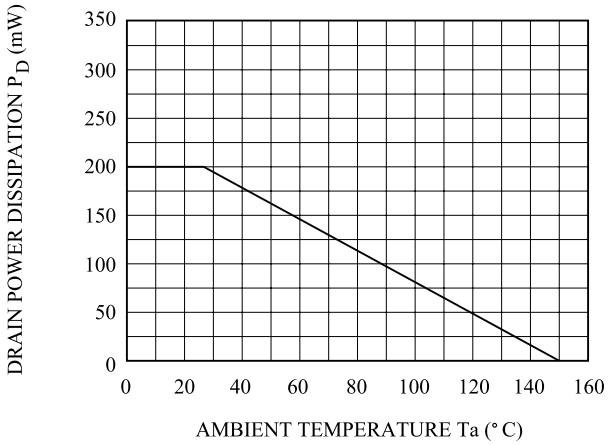

SWITCHING TIME TEST CIRCUIT

