

## Small Signal Diode


### Features

- ◊ Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistor (see equivalent circuit).
- ◊ The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- ◊ Only the on/off conditions need to be set for operation, making device design easy.
- ◊ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code.

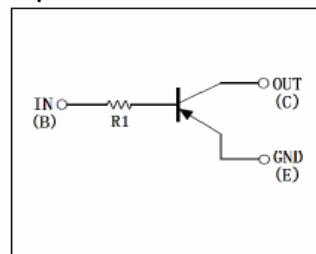
### Ordering Information

Package	Part No.	Packing	Marking
SOT-723	DTA143 TM	8K / 7" Reel	93
SOT-523	DTA143 TE	3K / 7" Reel	93
SOT-323	DTA143 TUA	3K / 7" Reel	93
SOT-23	DTA143 TCA	3K / 7" Reel	93
TO-92S	DTA143 TSA	3K / 7" Reel	

## DTA143 TM/TE/TUA/TCA/TSA PNP Small Signal Transistor



• Equivalent Circuit



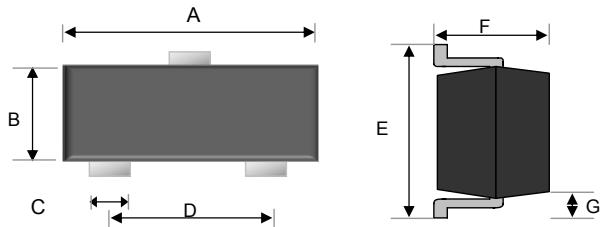
### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

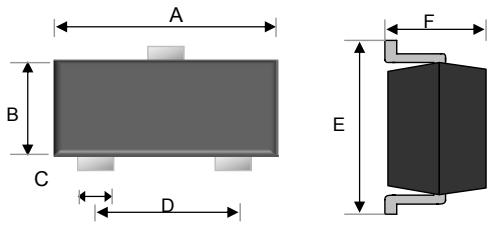
Type Number	Symbol	Value				Units
		TM	TE	TUA TCA	TSA	
Power Dissipation	PD	100	150	200	300	mW
Collector-Emitter Voltage	$V_{(BR)CBO}$			-50		V
Emitter-Base Voltage	$V_{(BR)CEO}$			-50		V
Emitter-base voltage	$V_{(BR)EBO}$			-5		V
Collector Current	$I_C$			-100		mA
Junction and Storage Temperature Range	$T_J, T_{STG}$			-55 to + 150		°C

Notes:1. Valid provided that electrodes are kept at ambient temperature

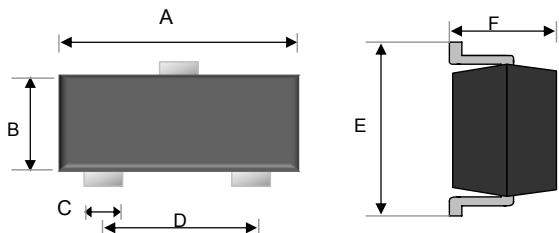
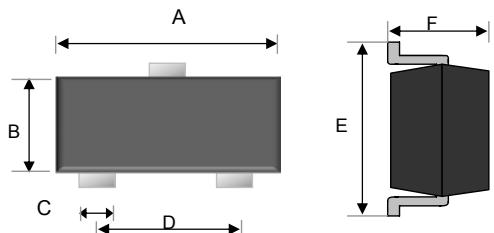
Parameter	Symbol	Min	Typ	Max	Condition	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	-50			$I_C=-50\mu A, I_E=0$	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	-50			$I_C=-1mA, I_B=0$	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	-5			$I_E=-50\mu A, I_C=0$	V
Collector cut-off current	$I_{CBO}$			-0.5	$V_{CE}=-50V, I_E=0$	$\mu A$
Emitter cut-off current	$I_{EBO}$			-0.5	$V_{EB}=-4V, I_C=0$	$\mu A$
DC Current Gain	$V_{CE(sat)}$			-0.3	$I_C=-5mA, I_B=-0.25mA$	V
Input Resistance	$h_{FE}$	100		600	$V_{CE}=-5V, I_C=-1mA$	
Resistance Ratio	$R_1$	3.29	4.7	6.11		KΩ
Transition Frequency	$f_T$		250		$V_{CE}=-10V, I_E=5mA, f=100MHz$	MHz

**SOT-23**


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.11	0.12
B	1.20	1.40	0.05	0.06
C	0.30	0.50	0.01	0.02
D	1.80	2.00	0.07	0.08
E	2.25	2.55	0.09	0.10
F	0.90	1.20	0.04	0.04
G	0.550 REF		0.022 REF	

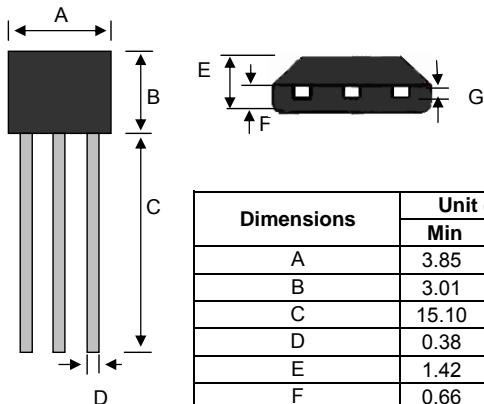
**SOT-323**


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.90	2.10	0.07	0.08
B	1.15	1.35	0.05	0.05
C	0.25	0.35	0.01	0.01
D	1.20	1.40	0.05	0.06
E	2.00	2.20	0.08	0.09
F	0.80	1.00	0.03	0.04

**SOT-523**

**SOT-723**


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.50	1.70	0.06	0.07
B	0.70	0.80	0.03	0.03
C	0.25	0.35	0.01	0.01
D	0.90	1.10	0.04	0.04
E	1.50	1.70	0.06	0.07
F	0.70	0.90	0.03	0.04

Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.15	1.25	0.05	0.05
B	0.75	0.85	0.03	0.03
C	0.17	0.27	0.01	0.01
D	0.8 TYP		0.31TYP	
E	1.15	1.25	0.05	0.05
F			0.50	
				0.02

**TO-92S**


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	3.85	4.15	0.15	0.16
B	3.01	3.31	0.12	0.13
C	15.10	15.50	0.59	0.61
D	0.38	0.55	0.01	0.02
E	1.42	1.62	0.06	0.06
F	0.66	0.86	0.03	0.03
G	0.36	0.51	0.01	0.02