

## Resonant Mode Combi IGBT®

The Thunderbolt IGBT® used in this Resonant Mode Combi is a new generation of high voltage power IGBTs. Using Non-Punch-Through Technology, the Thunderbolt IGBT® offers superior ruggedness and ultrafast switching speed.




### Features

- Low Forward Voltage Drop
- Low Tail Current
- Integrated Gate Resistor
- Low EMI, High Reliability
- Low forward Diode Voltage ( $V_F$ )
- RoHS Compliant
- Ultra soft recovery diode
- RBSOA and SCSOA Rated
- High Frequency Switching to 50KHz
- Ultra Low Leakage Current

### Typical Applications

- ZVS Phase Shifted Bridge
- Resonant Mode Switching
- Phase Shifted Bridge
- Welding
- Induction heating
- High Frequency SMPS



### Maximum Ratings

 All Ratings:  $T_C = 25^\circ C$  unless otherwise specified.

| Symbol         | Parameter   | Ratings     | Unit       |
|----------------|---|-------------|------------|
| $V_{CES}$      | Collector-Emitter Voltage                           | 600         | Volts      |
| $V_{GE}$       | Gate-Emitter Voltage                                | $\pm 30$    |            |
| $I_{C1}$       | Continuous Collector Current @ $T_C = 25^\circ C$   | 148         | Amps       |
| $I_{C2}$       | Continuous Collector Current @ $T_C = 100^\circ C$  | 80          |            |
| $I_{CM}$       | Pulsed Collector Current <sup>①</sup>               | 300         |            |
| SSOA           | Switching Safe Operating Area @ $T_J = 150^\circ C$ | 300A @ 600V |            |
| $P_D$          | Total Power Dissipation                             | 500         | Watts      |
| $T_J, T_{STG}$ | Operating and Storage Junction Temperature Range    | -55 to 150  | $^\circ C$ |

### Static Electrical Characteristics

| Symbol        | Characteristic / Test Conditions   | Min | Typ | Max  | Unit    |
|---------------|--|-----|-----|------|---------|
| $V_{(BR)CES}$ | Collector-Emitter Breakdown Voltage ( $V_{GE} = 0V, I_C = 4mA$ )                           | 600 | -   | -    | Volts   |
| $V_{GE(TH)}$  | Gate Threshold Voltage ( $V_{CE} = V_{GE}, I_C = 2.0mA, T_J = 25^\circ C$ )                | 3   | 4   | 5    |         |
| $V_{CE(ON)}$  | Collector Emitter On Voltage ( $V_{GE} = 15V, I_C = 100A, T_J = 25^\circ C$ )              | 1.7 | 2.1 | 2.5  |         |
|               | Collector Emitter On Voltage ( $V_{GE} = 15V, I_C = 100A, T_J = 125^\circ C$ )             | -   | 2.5 | -    |         |
| $I_{CES}$     | Collector Cut-off Current ( $V_{CE} = 600V, V_{GE} = 0V, T_J = 25^\circ C$ ) <sup>②</sup>  | -   | -   | 75   | $\mu A$ |
|               | Collector Cut-off Current ( $V_{CE} = 600V, V_{GE} = 0V, T_J = 125^\circ C$ ) <sup>②</sup> | -   | -   | 1500 |         |
| $I_{GES}$     | Gate-Emitter Leakage Current ( $V_{GE} = \pm 30V$ )  | -   | -   | 300  | nA      |



CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

## Dynamic Characteristic

APT100GT60JRDL

| Symbol       | Characteristic                         | Test Conditions   | Min  | Typ  | Max | Unit |
|--------------|--|---|------|------|-----|------|
| $C_{ies}$    | Input Capacitance                      | $V_{GE} = 0V, V_{CE} = 25V$<br>$f = 1MHz$   | -    | 5150 | -   | pF   |
| $C_{oes}$    | Output Capacitance                     |   | -    | 475  | -   |      |
| $C_{res}$    | Reverse Transfer Capacitance           |   | -    | 295  | -   |      |
| $V_{GEP}$    | Gate-to-Emitter Plateau Voltage        | Gate Charge<br>$V_{GE} = 15V$<br>$V_{CE} = 300V$<br>$I_C = 100A$  | -    | 8.0  | -   | V    |
| $Q_g$        | Total Gate Charge <sup>③</sup>         |   | -    | 460  | -   | nC   |
| $Q_{ge}$     | Gate-Emitter Charge                    |   | -    | 40   | -   |      |
| $Q_{gc}$     | Gate-Collector Charge                  |   | -    | 210  | -   |      |
| SSOA         | Switching Safe Operating Area          | $T_J = 150^\circ C, R_G = 4.3\Omega, V_{GE} = 15V,$<br>$L = 100\mu H, V_{CE} = 600V$  | 300  |      |     | A    |
| $t_{d(on)}$  | Turn-On Delay Time                     | Inductive Switching (25°C)<br>$V_{CC} = 400V$<br>$V_{GE} = 15V$<br>$I_C = 100A$<br>$R_G = 4.3\Omega$<br>$T_J = +25^\circ C$   | -    | 40   | -   | ns   |
| $t_r$        | Current Rise Time                      |   | -    | 75   | -   |      |
| $t_{d(off)}$ | Turn-Off Delay Time                    |   | -    | 320  | -   |      |
| $t_f$        | Current Fall Time                      |   | -    | 100  | -   | μJ   |
| $E_{on1}$    | Turn-On Switching Energy <sup>④</sup>  |   | -    | 3250 | -   |      |
| $E_{on2}$    | Turn-On Switching Energy <sup>⑤</sup>  |   | -    | 3525 | -   |      |
| $E_{off}$    | Turn-Off Switching Energy <sup>⑥</sup> | -   | 3125 | -    |     |      |
| $t_{d(on)}$  | Turn-On Delay Time                     | Inductive Switching (125°C)<br>$V_{CC} = 400V$<br>$V_{GE} = 15V$<br>$I_C = 100A$<br>$R_G = 4.3\Omega$<br>$T_J = +125^\circ C$ | -    | 40   | -   | ns   |
| $t_r$        | Current Rise Time                      |   | -    | 75   | -   |      |
| $t_{d(off)}$ | Turn-Off Delay Time                    |   | -    | 350  | -   |      |
| $t_f$        | Current Fall Time                      |   | -    | 100  | -   | μJ   |
| $E_{on1}$    | Turn-On Switching Energy <sup>④</sup>  |   | -    | 3275 | -   |      |
| $E_{on2}$    | Turn-On Switching Energy <sup>⑤</sup>  |   | -    | 4650 | -   |      |
| $E_{off}$    | Turn-Off Switching Energy <sup>⑥</sup> | -   | 3750 | -    |     |      |

## Thermal and Mechanical Characteristics

| Symbol          | Characteristic / Test Conditions   | Min  | Typ  | Max  | Unit   |
|-----------------|--|------|------|------|--------|
| $R_{\theta JC}$ | Junction to Case (IGBT)  | -    | -    | 0.25 | °C/W   |
| $R_{\theta JC}$ | Junction to Case (DIODE)   | -    | -    | 0.34 |        |
| $W_T$           | Package Weight   | -    | 29.2 | -    | g      |
| Torque          | Terminals and Mounting Screws  | -    | -    | 10   | in-lbf |
|                 |  | -    | -    | 1.1  | N·m    |
| $V_{isolation}$ | RMS Voltage (50-60Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.) | 2500 | -    | -    | Volts  |

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② For Combi devices,  $I_{ces}$  includes both IGBT and FRED leakages.

③ See MIL-STD-750 Method 3471.

④  $E_{on1}$  is the clamped inductive turn-on energy of the IGBT only, without the effect of a commutating diode reverse recovery current adding to  $z$  a the IGBT turn-on loss. Tested in inductive switching test circuit shown in figure 21, but with a Silicon Carbide diode.

⑤  $E_{on2}$  is the clamped inductive turn-on energy that includes a commutating diode reverse recovery current in the IGBT turn-on switching loss. (See Figures 21, 22.)

⑥  $E_{off}$  is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1. (See Figures 21, 23.)

⑦  $R_G$  is external gate resistance not including gate driver impedance.

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

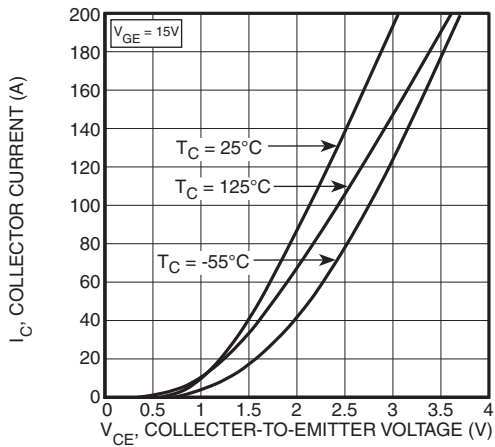


FIGURE 1, Output Characteristics ( $V_{GE} = 15V$ )

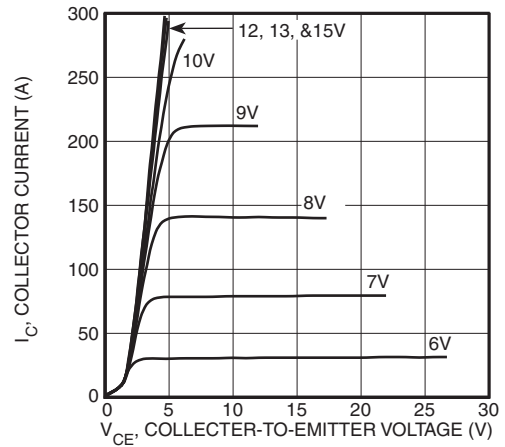


FIGURE 2, Output Characteristics ( $T_J = 125^\circ C$ )

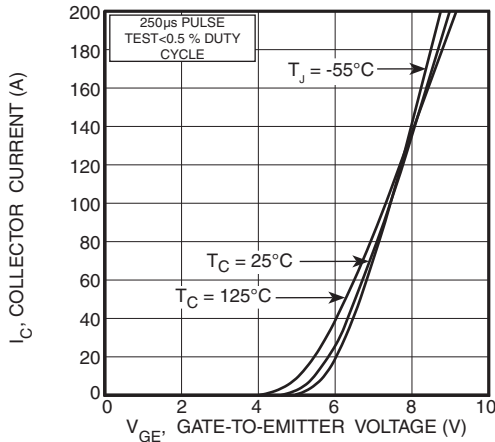


FIGURE 3, Transfer Characteristics

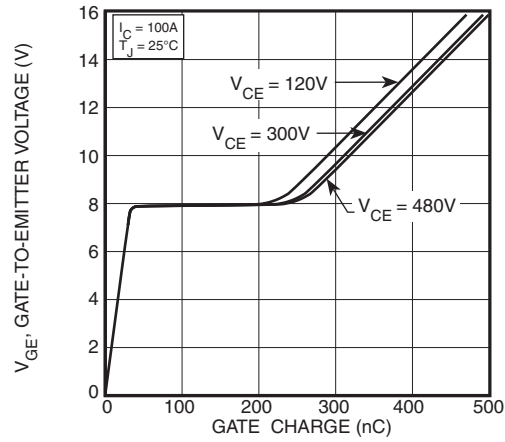


FIGURE 4, Gate Charge

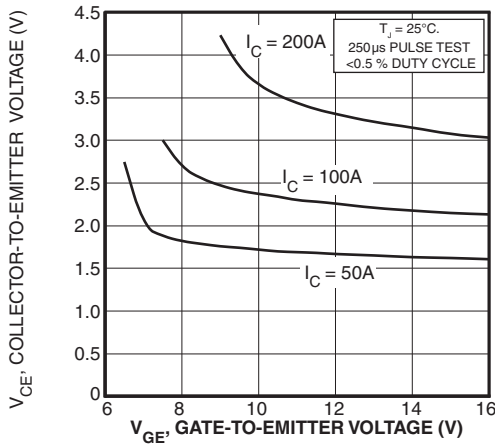


FIGURE 5, On State Voltage vs Gate-to-Emitter Voltage

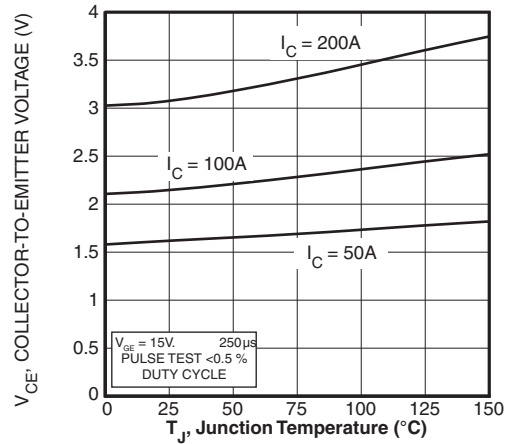


FIGURE 6, On State Voltage vs Junction Temperature

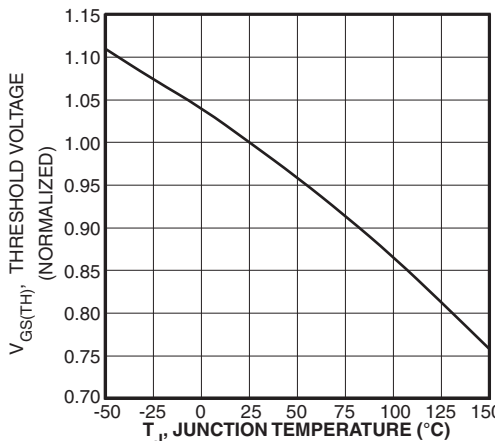


FIGURE 7, Threshold Voltage vs. Junction Temperature

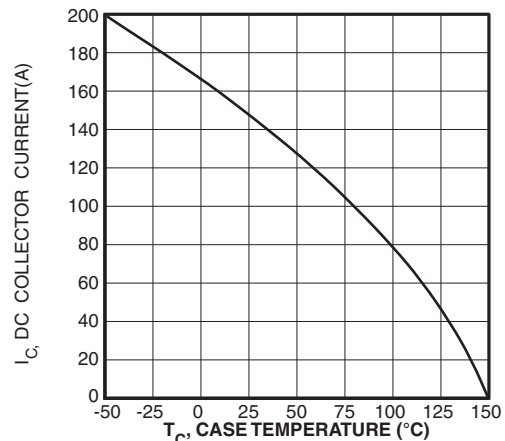


FIGURE 8, DC Collector Current vs Case Temperature

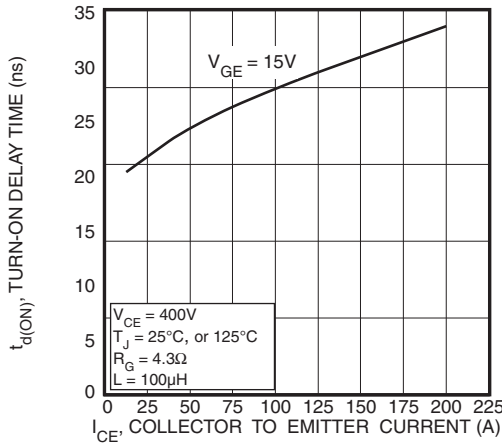


FIGURE 9, Turn-On Delay Time vs Collector Current

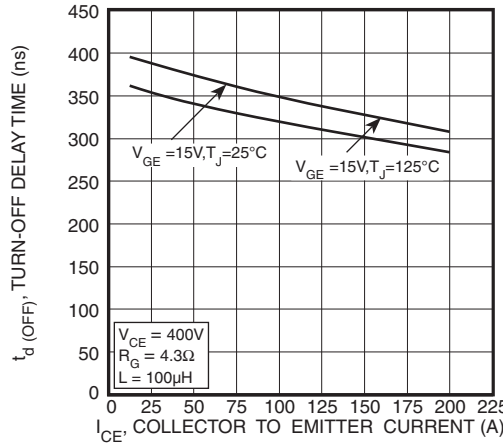


FIGURE 10, Turn-Off Delay Time vs Collector Current

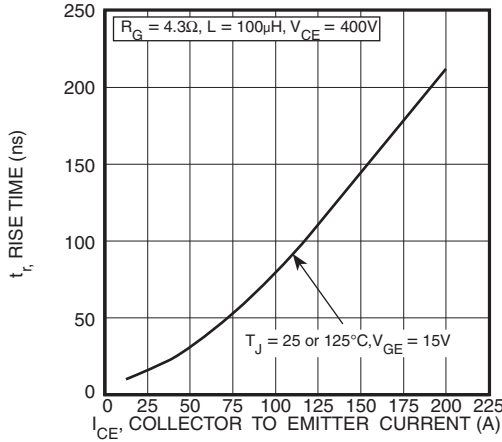


FIGURE 11, Current Rise Time vs Collector Current

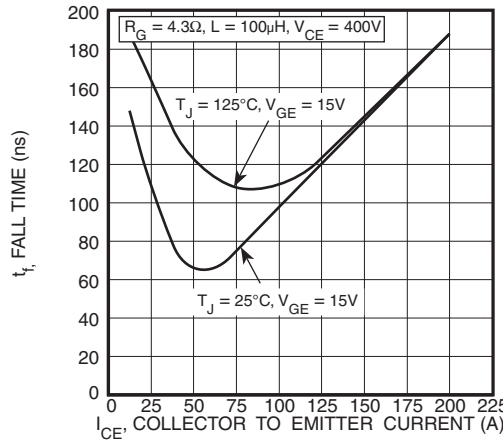


FIGURE 12, Current Fall Time vs Collector Current

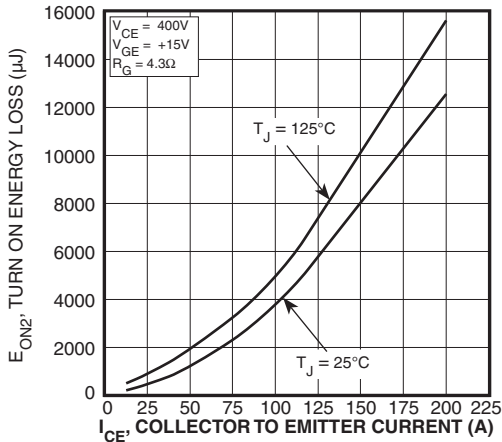


FIGURE 13, Turn-On Energy Loss vs Collector Current

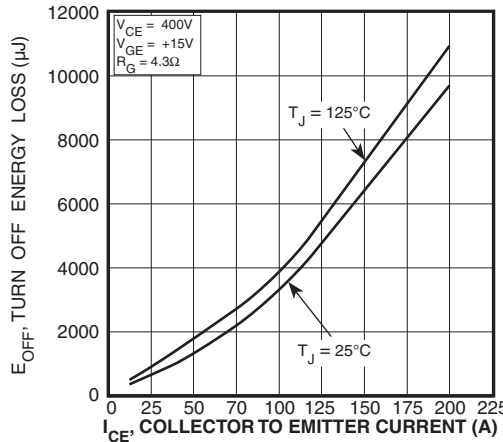


FIGURE 14, Turn Off Energy Loss vs Collector Current

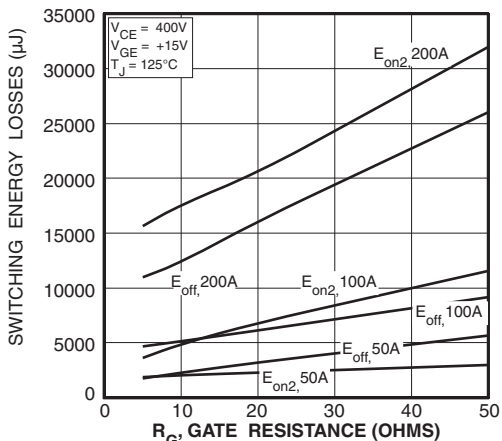


FIGURE 15, Switching Energy Losses vs. Gate Resistance

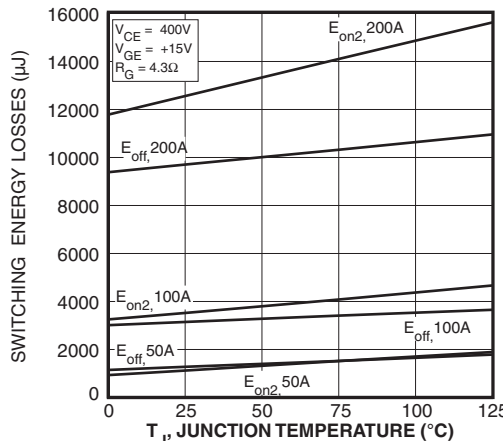


FIGURE 16, Switching Energy Losses vs Junction Temperature

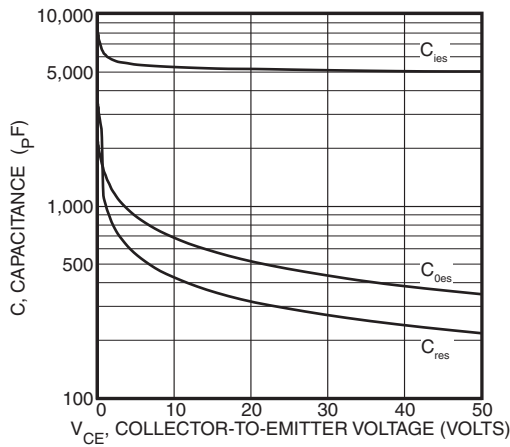


Figure 17, Capacitance vs Collector-To-Emitter Voltage

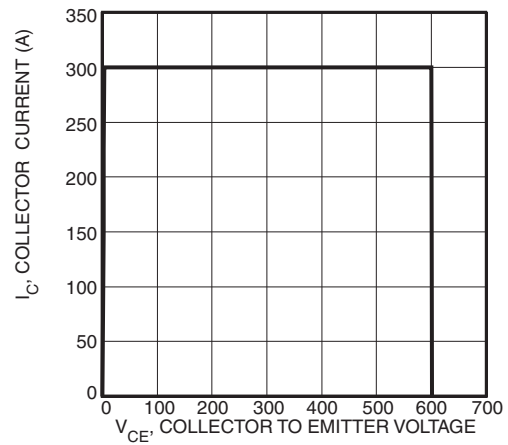


Figure 18, Minimum Switching Safe Operating Area

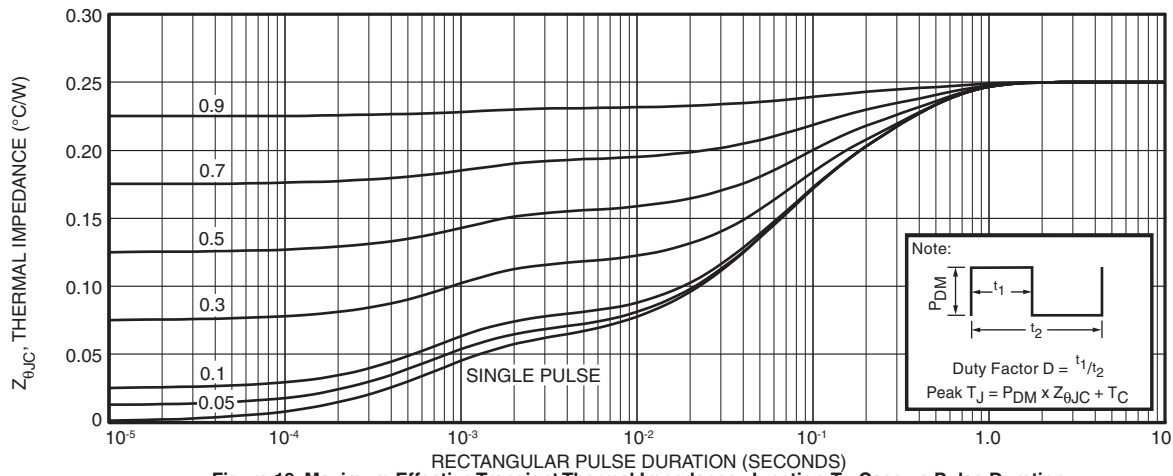


Figure 19, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

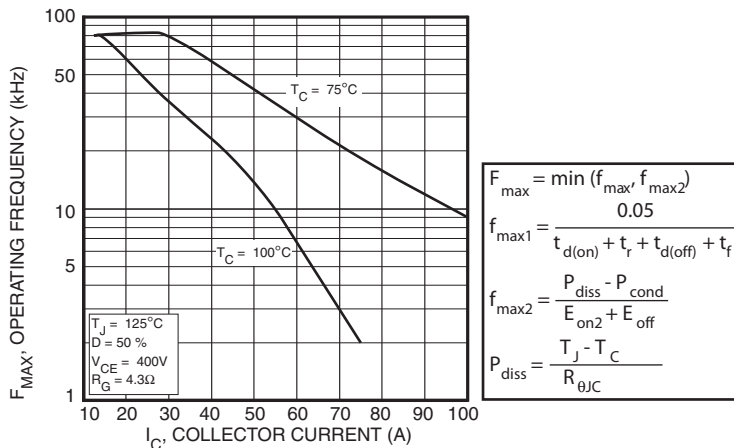


Figure 20, Operating Frequency vs Collector Current

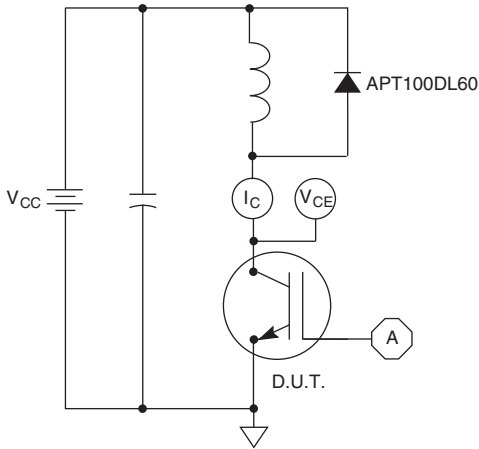


Figure 21, Inductive Switching Test Circuit

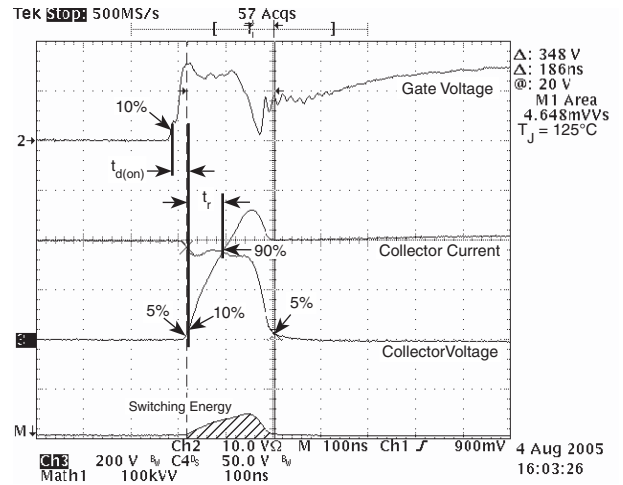


Figure 22, Turn-on Switching Waveforms and Definitions

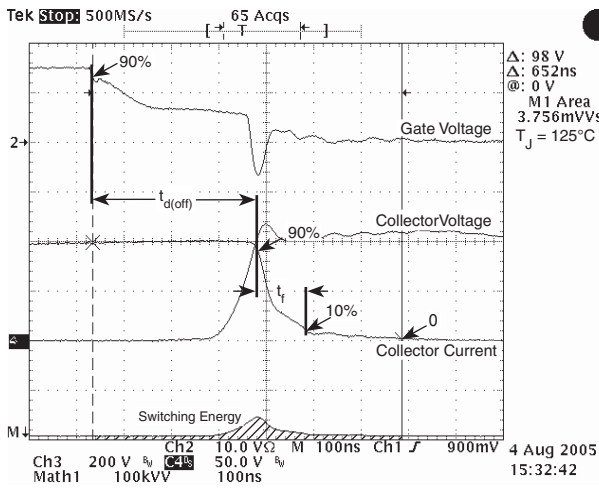


Figure 23, Turn-off Switching Waveforms and Definitions

**ULTRAFAST SOFT RECOVERY ANTI-PARALLEL DIODE**

**MAXIMUM RATINGS**

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

| Symbol       | Characteristic / Test Conditions   | APT100GT60JRDL | Unit |
|--------------|--|----------------|------|
| $I_{F(AV)}$  | Maximum Average Forward Current ( $T_C = 60^\circ\text{C}$ , Duty Cycle = 0.5) | 100            | Amps |
| $I_{F(RMS)}$ | RMS Forward Current (Square wave, 50% duty)                                    | 300            |      |
| $I_{FSM}$    | Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3 ms)      | 600            |      |

**STATIC ELECTRICAL CHARACTERISTICS**

| Symbol | Characteristic / Test Conditions | Min  | Type | Max  | Unit |       |
|--------|----------------------------------|--|------|------|------|-------|
| $V_F$  | Forward Voltage                  | $I_F = 100\text{A}$                          | 1.6  | -    | 2.1  | Volts |
|        |                                  | $I_F = 200\text{A}$                          |      | 2.0  |      |       |
|        |                                  | $I_F = 100\text{A}, T_J = 125^\circ\text{C}$ |      | 1.25 |      |       |

**DYNAMIC CHARACTERISTICS**

| Symbol    | Characteristic                   | Test Conditions  | Min | Typ   | Max | Unit |
|-----------|----------------------------------|--|-----|-------|-----|------|
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 1\text{A}, di_F/dt = -100\text{A}/\mu\text{s}, V_R = 30\text{V}, T_J = 25^\circ\text{C}$      | -   | 110   | -   | ns   |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 100\text{A}, di_F/dt = -200\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 25^\circ\text{C}$   | -   | 487   | -   | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 2328  | -   | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 11    | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 100\text{A}, di_F/dt = -200\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 125^\circ\text{C}$  | -   | 716   | -   | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 5954  | -   | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 18    | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 100\text{A}, di_F/dt = -1000\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 125^\circ\text{C}$ | -   | 333   | -   | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |  | -   | 10002 | -   | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |  | -   | 49    | -   | Amps |

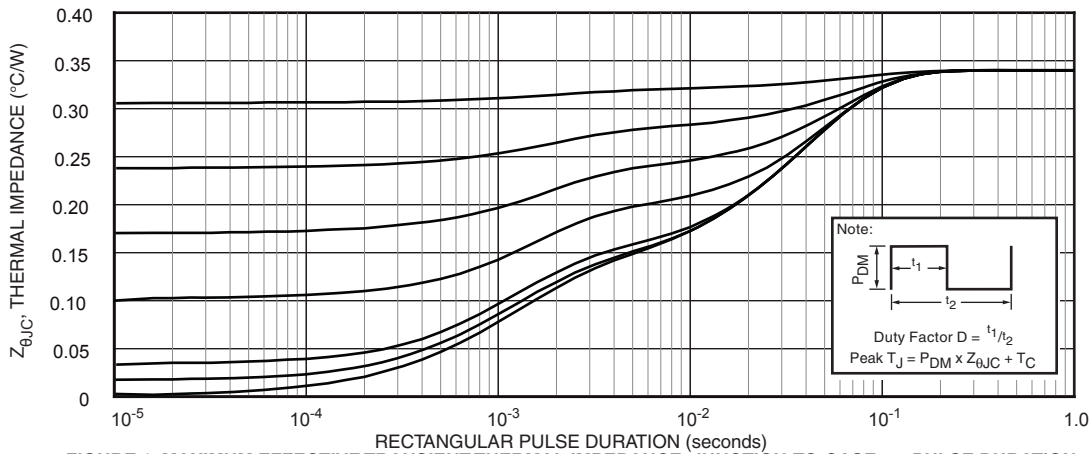


FIGURE 1. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

# Typical Performance Curves

APT100GT60JRDL

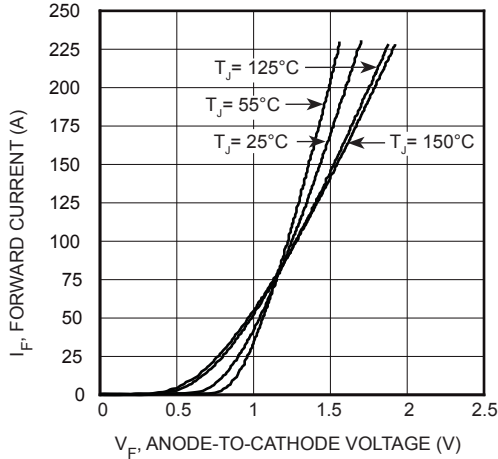


FIGURE 2, Forward Current vs. Forward Voltage

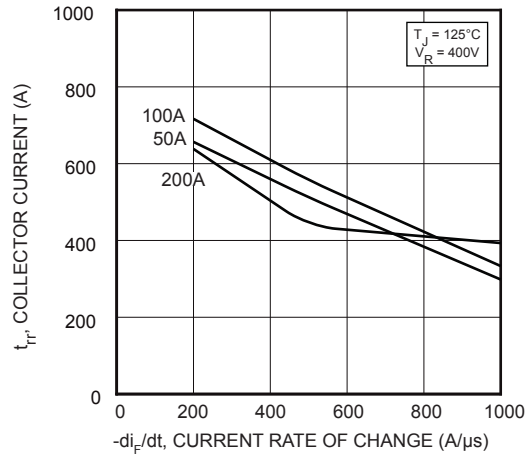


FIGURE 3, Reverse Recovery Time vs. Current Rate of Change

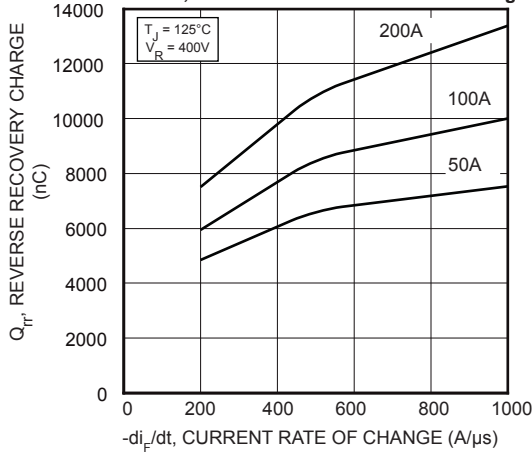


FIGURE 4, Reverse Recovery Charge vs. Current Rate of Change

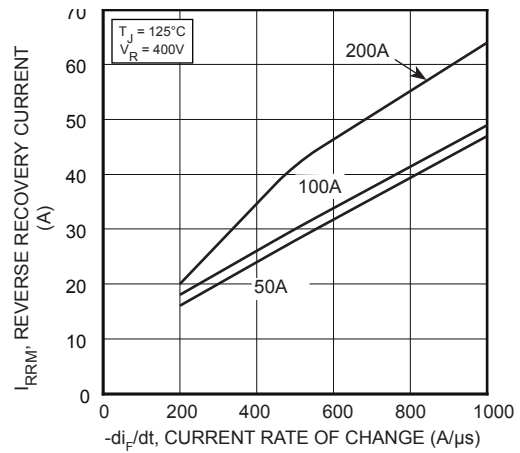


FIGURE 5, Reverse Recovery Current vs. Current Rate of Change

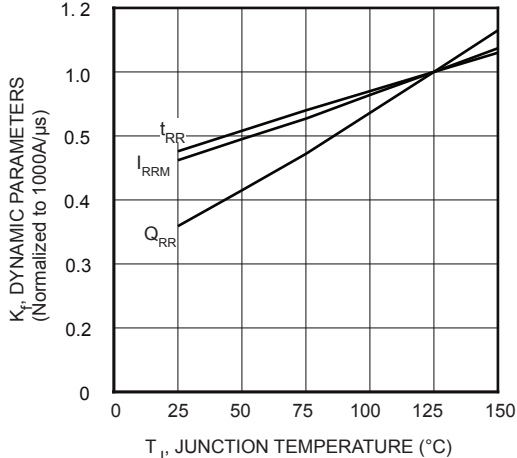


FIGURE 6, Dynamic Parameters vs. Junction Temperature

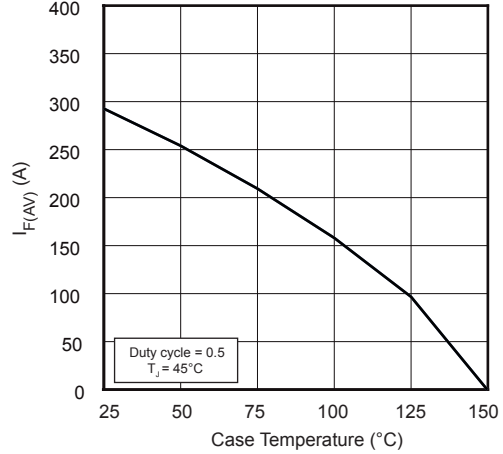


FIGURE 7, Maximum Average Forward Current vs. Case Temperature

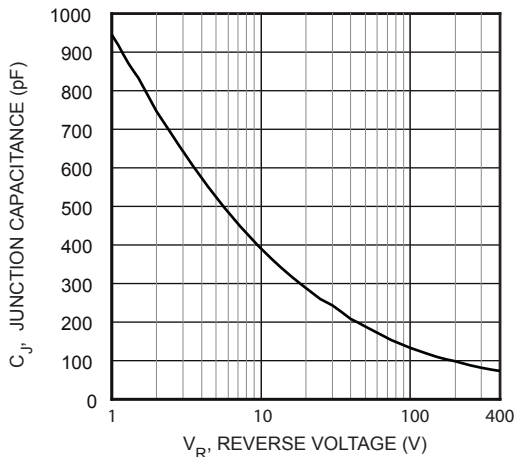


FIGURE 8, Junction Capacitance vs. Reverse Voltage



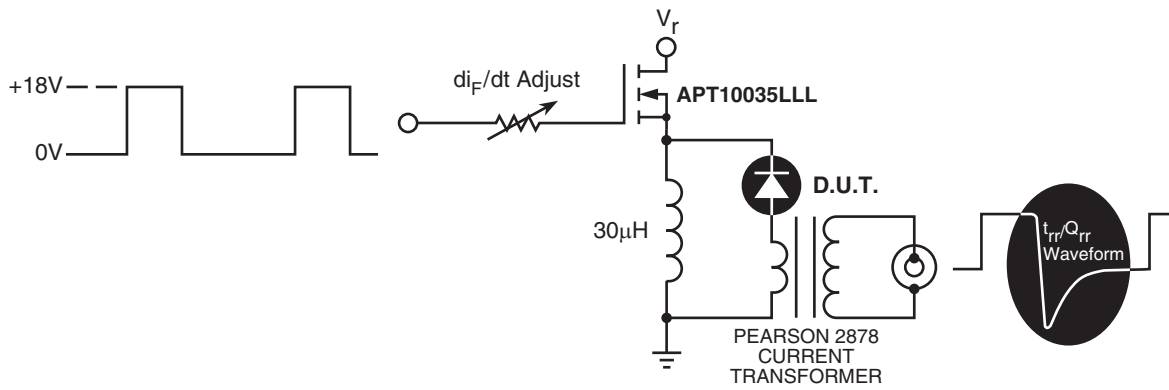


Figure 32, Diode Test Circuit

- 1  $I_F$  - Forward Conduction Current
- 2  $di_F/dt$  - Rate of Diode Current Change Through Zero Crossing.
- 3  $I_{RRM}$  - Maximum Reverse Recovery Current.
- 4  $t_{rr}$  - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through  $I_{RRM}$  and  $0.25 \cdot I_{RRM}$  passes through zero.
- 5  $Q_{rr}$  - Area Under the Curve Defined by  $I_{RRM}$  and  $t_{rr}$ .


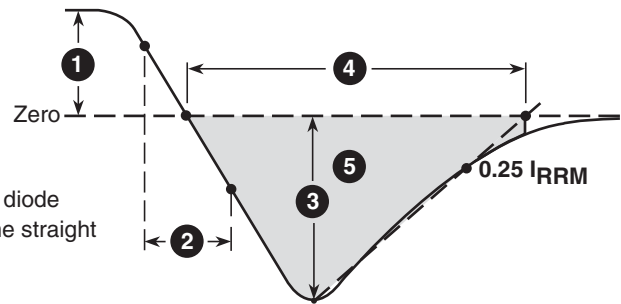


Figure 33, Diode Reverse Recovery Waveform and Definitions

SOT-227 (ISOTOP®) Package Outline

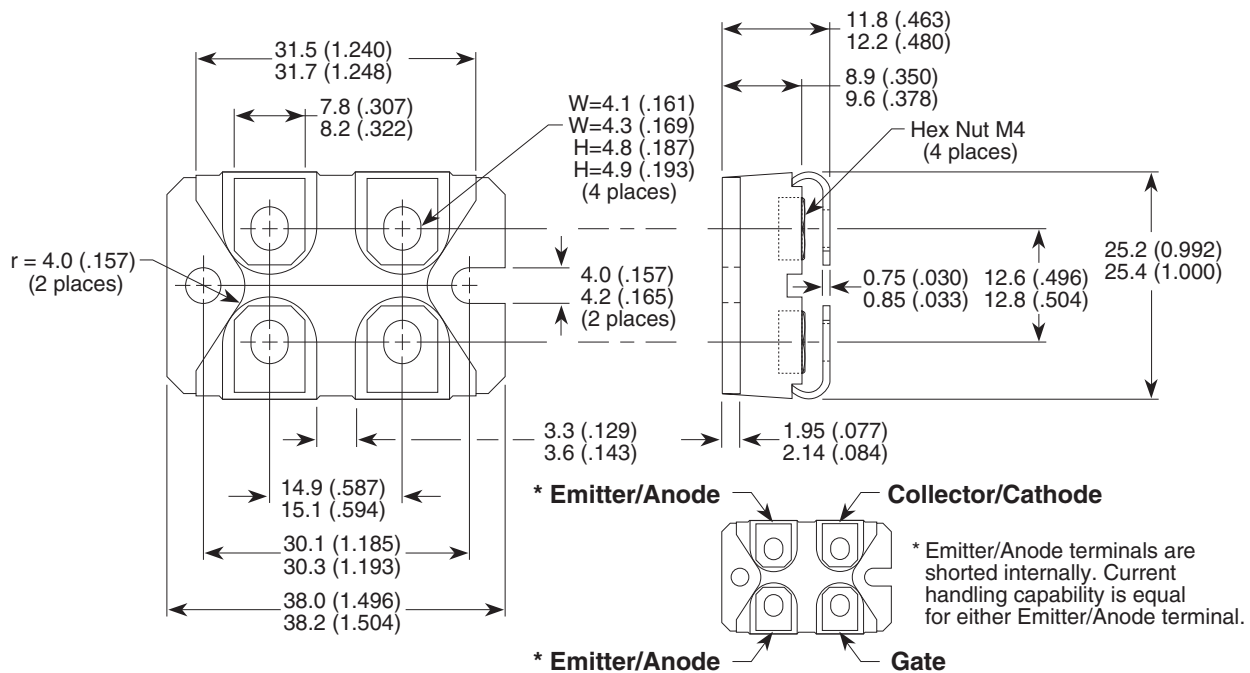

Dimensions in Millimeters and (Inches)