


Description

The 1N1D4148 is a switching diode

Pb-Free Packages are available




Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Breakdown Voltage	V_{BR}	$I_R = 100\mu A$	100			V
Reverse Leakage Current	I_R	$V_{RWM} = 20V$ $T = 25^\circ C$			0.1	μA
		$V_{RWM} = 75V$ $T = 25^\circ C$			0.5	μA
Forward Voltage	V_F	$I_F = 10mA$			1.0	V
Repetitive Peak Forward Current	I_{FRM}				300	mA
Continuous Forward Current	I_O				150	mA
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10mA$			4.0	ns
Diode Capacitance	C	$V_R = 0V$ $f = 1MHz$			4.0	pF


Typical Characteristics

Rating	Symbol	Value	Units
Lead Soldering Temperature	T_L	260 (10 sec)	$^\circ C$
Operating Temperature	T_J	-55 to +125	$^\circ C$
Storage Temperature	T_{STG}	-55 to +150	$^\circ C$


Typical Characteristics

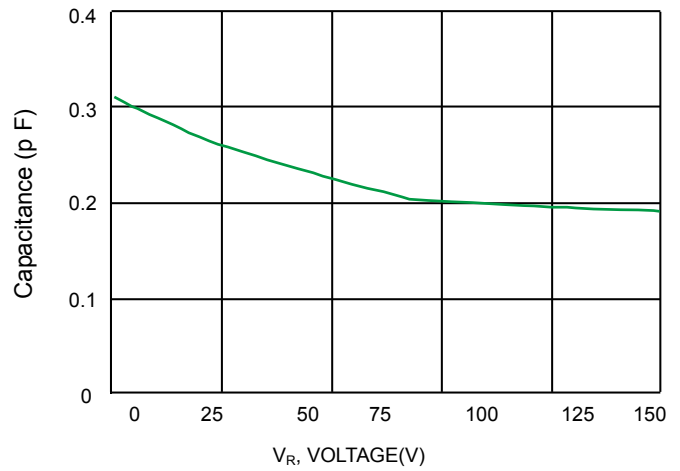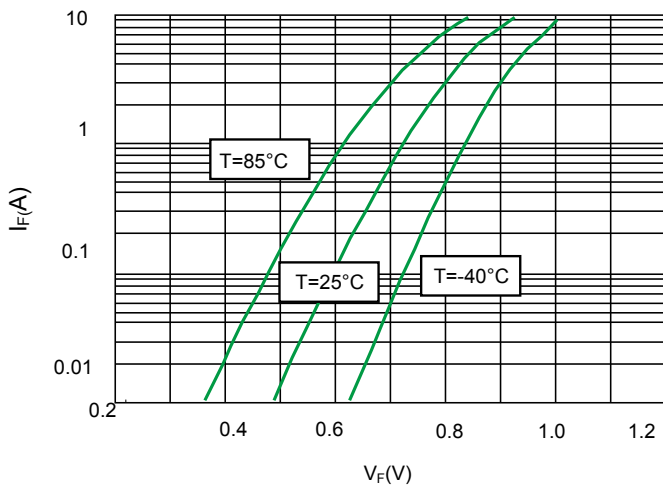

Product dimension (SOD-123)

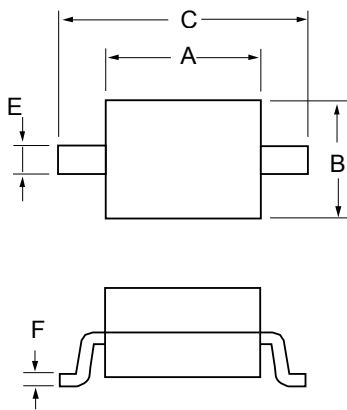

Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.100	0.112	2.54	2.84
B	0.055	0.071	1.40	1.80
C	0.140	0.152	3.56	3.86
D	0.037	0.053	0.94	1.35
E	0.020	0.028	0.51	0.71
F	-	0.006	-	0.15
H	0.000	0.004	0.00	0.10

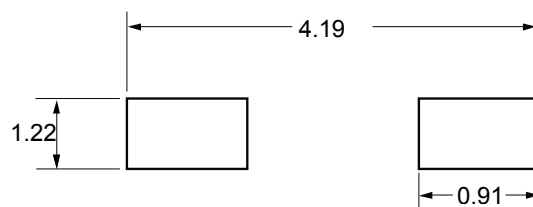


Unit:mm

Ordering information

Device	Package	Shipping
1N1D4148	SOD-123 (Pb-Free)	3000 / Tape & Reel


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.