

## 80V, 10A POWER SCHOTTKY RECTIFIER

### Features


- Low forward voltage drop
- Low power loss and High efficiency
- Low leakage current
- High surge capacity
- Full lead (Pb)-free and RoHS compliant device

### Applications

- High efficiency SMPS
- Output rectification
- High frequency switching
- Freewheeling
- DC-DC converter systems

### Description

The SDB1080PH is suited for Switch Mode Power Supply and high frequency DC to DC converters. This device is especially intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

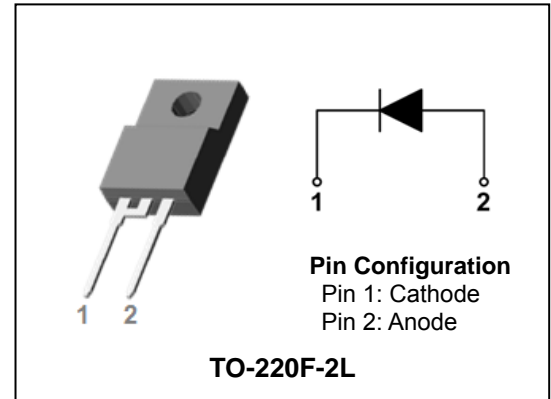


### Product Characteristics

$I_{F(AV)}$	<b>10A</b>
$V_{RRM}$	<b>80V</b>
$V_{FM}$ at 125°C	<b>0.65V (Typ.)</b>
$I_{FSM}$	<b>150A</b>

### Ordering Information

Device	Marking Code	Package	Packaging
SDB1080PH	SDB1080	TO-220F-2L	Tube

### Marking Information

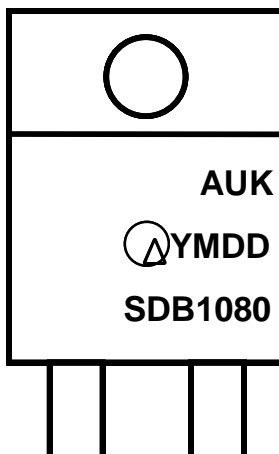

AUK = Manufacture Logo  
 $\Delta$  = Control Code of Manufacture  
 YMDD = Date Code Marking  
 - . Y = Year Code  
 - . M = Monthly Code  
 - . D = Daily Code  
 SDB1080 = Specific Device Code

## Absolute Maximum Ratings (Limiting Values)

Characteristic	Symbol	Value	Unit
Maximum repetitive reverse voltage Maximum working peak reverse voltage Maximum DC blocking voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	80	V
Maximum average forward rectified current	per diode	10	A
	total device	20	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	$I_{FSM}$	150	A
Storage temperature range	$T_{stg}$	-45°C to +150°C	°C
Maximum operating junction temperature	$T_j$	150	°C

## Thermal Characteristics


Characteristic	Symbol	Value	Unit
Maximum thermal resistance junction to case	$R_{th(j-c)}$	4.0	°C/W

## Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit	
Peak forward voltage drop	$V_{FM}^{(1)}$	$I_{FM} = 10A$	$T_j = 25^\circ C$	-	0.70	0.80	V
			$T_j = 125^\circ C$	-	0.65	0.72	V
Reverse leakage current	$I_{RM}^{(1)}$	$V_R = V_{RRM}$	$T_j = 25^\circ C$	-	-	0.6	mA
			$T_j = 125^\circ C$	-	-	100	mA
Junction capacitance	$C_j$	$V_R = 1V_{DC}, f=1MHz$	-	550	-	pF	

**Note :** (1) Pulse test :  $t_p \leq 380 \mu s$ , Duty cycle  $\leq 2\%$

To evaluate the conduction losses use the following equation:  $P_F = 0.36 \times I_{F(AV)} + 0.0335 I_{F(RMS)}^2$

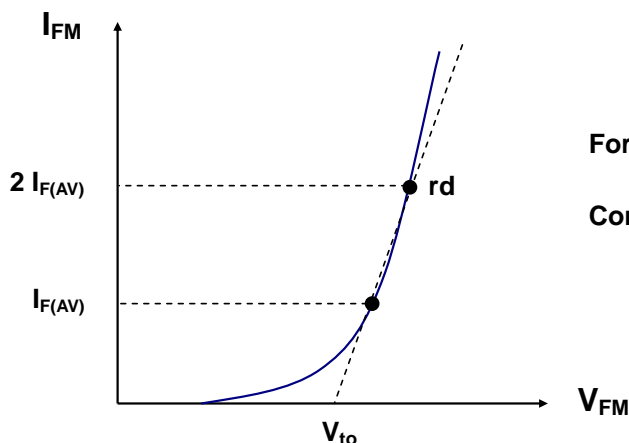


$$\text{Forward Voltage : } V_{FM} = V_{to} + rd I_{FM}$$


$$\text{Conduction Loss : } P_F = V_{to} I_{F(AV)} + rd I_{F(RMS)}^2$$

## Rating and Characteristic Curves


**Fig. 1) Typical Forward Characteristics**

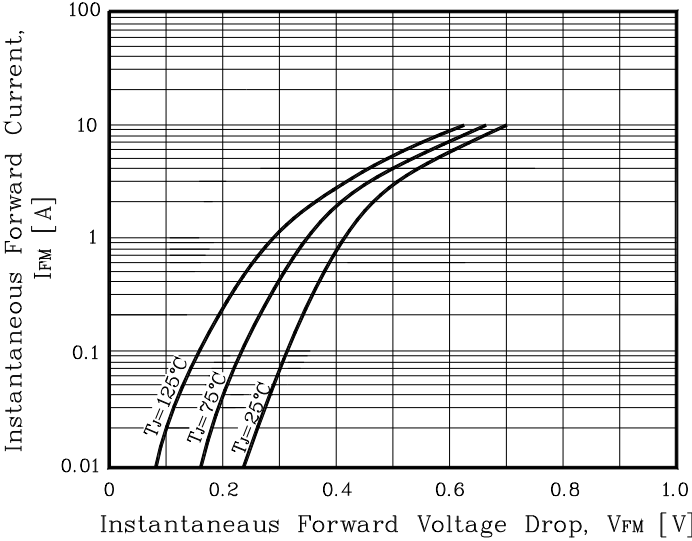


**Fig. 2) Typical Reverse Characteristics**

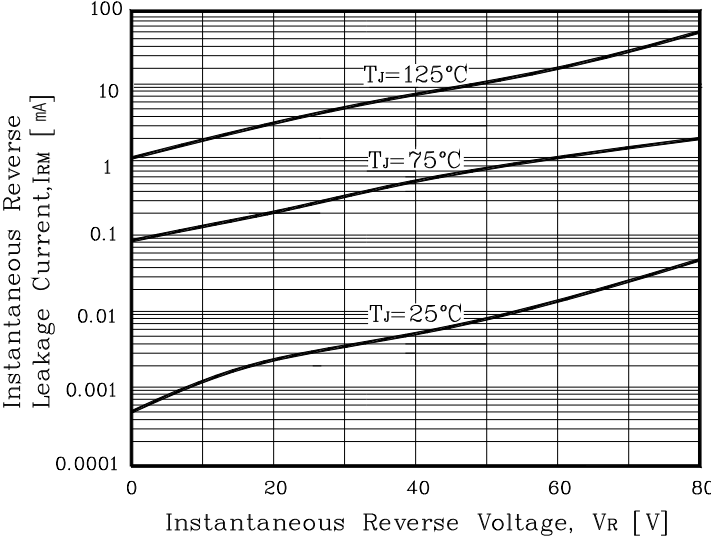


**Fig. 3) Maximum Forward Derivative Curve**

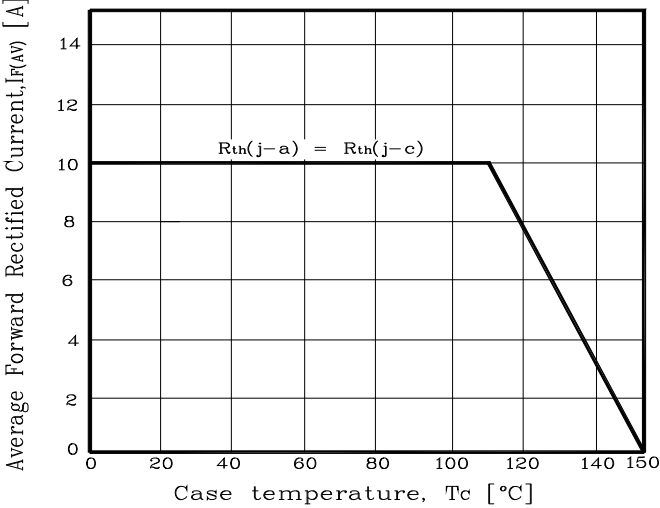


**Fig. 4) Forward Power Dissipation**

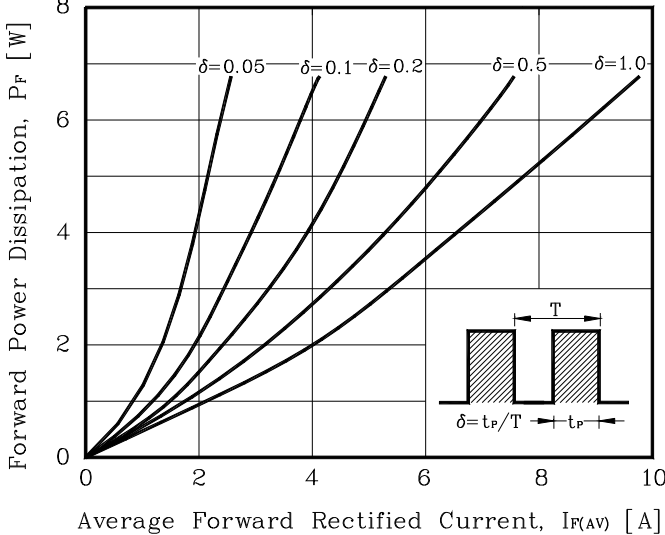


**Fig. 5) Maximum Non-Repetitive Peak Forward Surge Current**

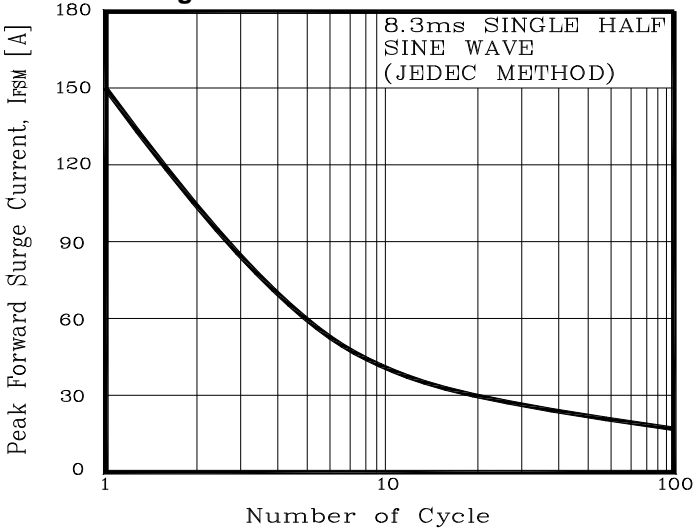

**Fig. 6) Typical Junction Capacitance**

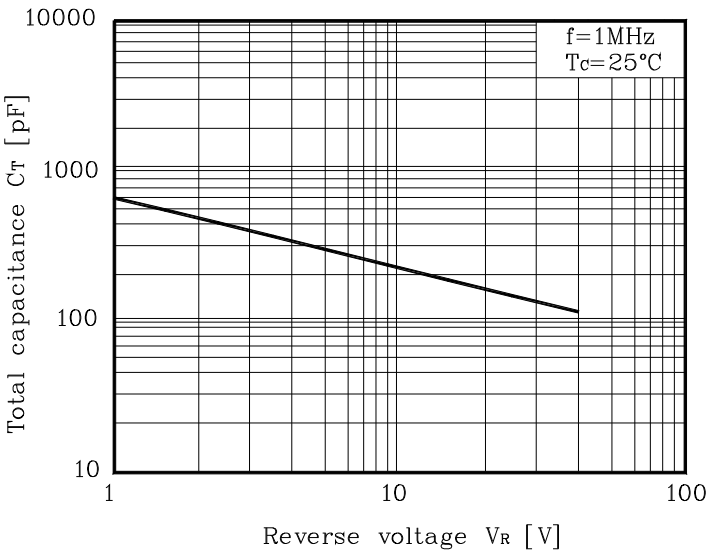

## Package Outline Dimension

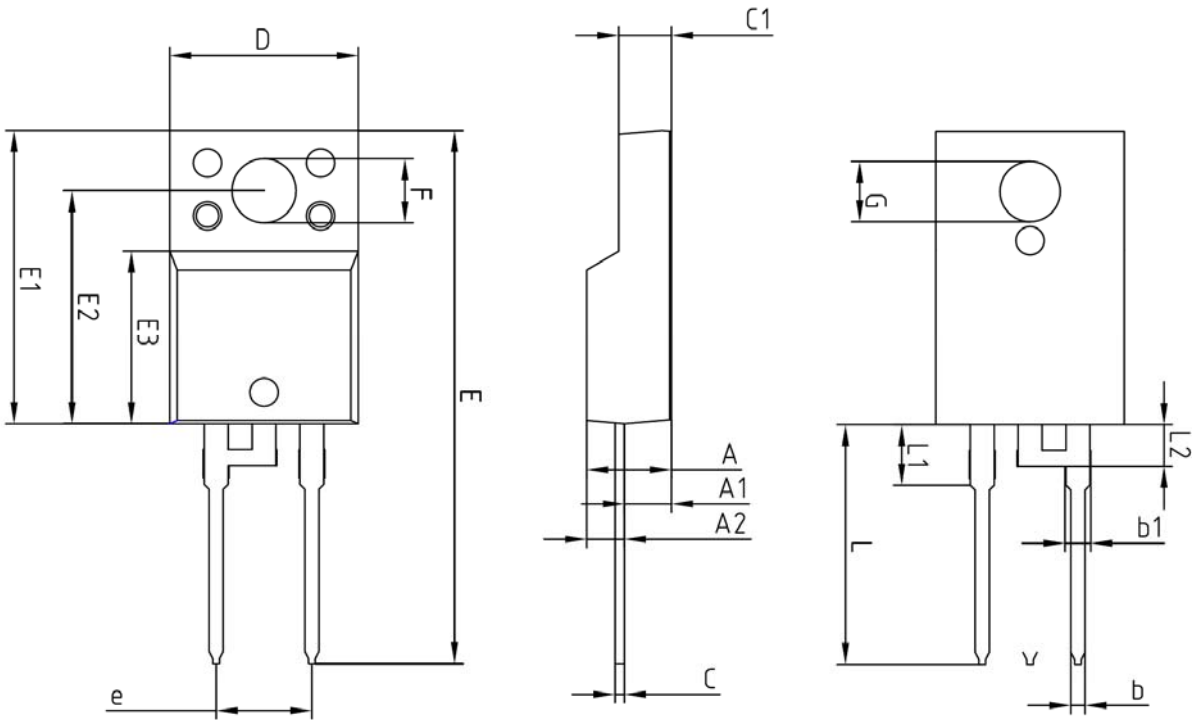

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	—	—	4.60	
A1	2.45	2.50	2.55	
A2	1.95	2.00	2.05	
b	0.65	0.75	0.85	
b1	1.07	1.27	1.47	
C	0.40	0.50	0.60	
C1	2.70	2.80	2.90	
D	9.90	10.00	10.10	
E	28.00	—	28.60	
E1	15.50	15.60	15.70	
E2	12.30	12.40	12.50	
E3	9.15	9.20	9.25	
F	3.30	3.40	3.50	
G	3.10	3.20	3.30	
e	5.08 BSC			
L	12.40	—	13.00	
L1	3.46 BSC			
L2	2.21 BSC			

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**