

Silicon NPN Power Transistors

2SC4073

DESCRIPTION

- With TO-220F package
- High voltage
- High speed switching

APPLICATIONS

- For use in switching regulator and general purpose applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

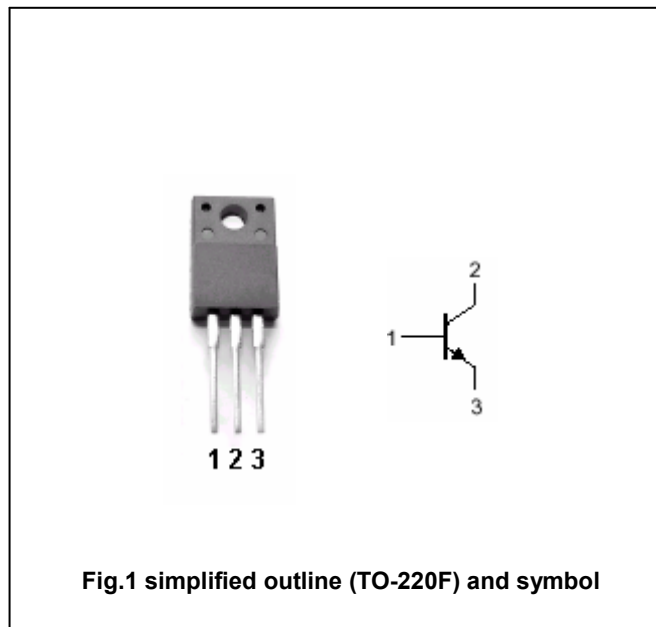


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings ($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	500	V
V_{CEO}	Collector-emitter voltage	Open base	400	V
V_{EBO}	Emitter-base voltage	Open collector	10	V
I_C	Collector current		5	A
I_{CM}	Collector current-peak		10	A
I_B	Base current		2	A
P_C	Collector power dissipation	$T_C=25^\circ\text{C}$	30	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon NPN Power Transistors

2SC4073

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=25mA; I_B=0$	400			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=2A; I_B=0.4 A$			0.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=2A; I_B=0.4 A$			1.3	V
I_{CBO}	Collector cut-off current	$V_{CB}=500V; I_E=0$			100	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=10V; I_C=0$			100	μA
h_{FE}	DC current gain	$I_C=2A; V_{CE}=4V$	10		30	
f_T	Transition frequency	$I_E=-0.3A; V_{CE}=12V$		10		MHz
C_{OB}	Output capacitance	$I_E=0; V_{CB}=10V; f=1MHz$		30		pF

Switching times

t_{on}	Turn-on time	$I_C=2A; R_L=100\Omega$ $I_{B1}=0.2A; I_{B2}=-0.4A$ $V_{CC}=200V$			1.0	μs
t_s	Storage time				3.0	μs
t_f	Fall time				0.5	μs

Silicon NPN Power Transistors

2SC4073

PACKAGE OUTLINE

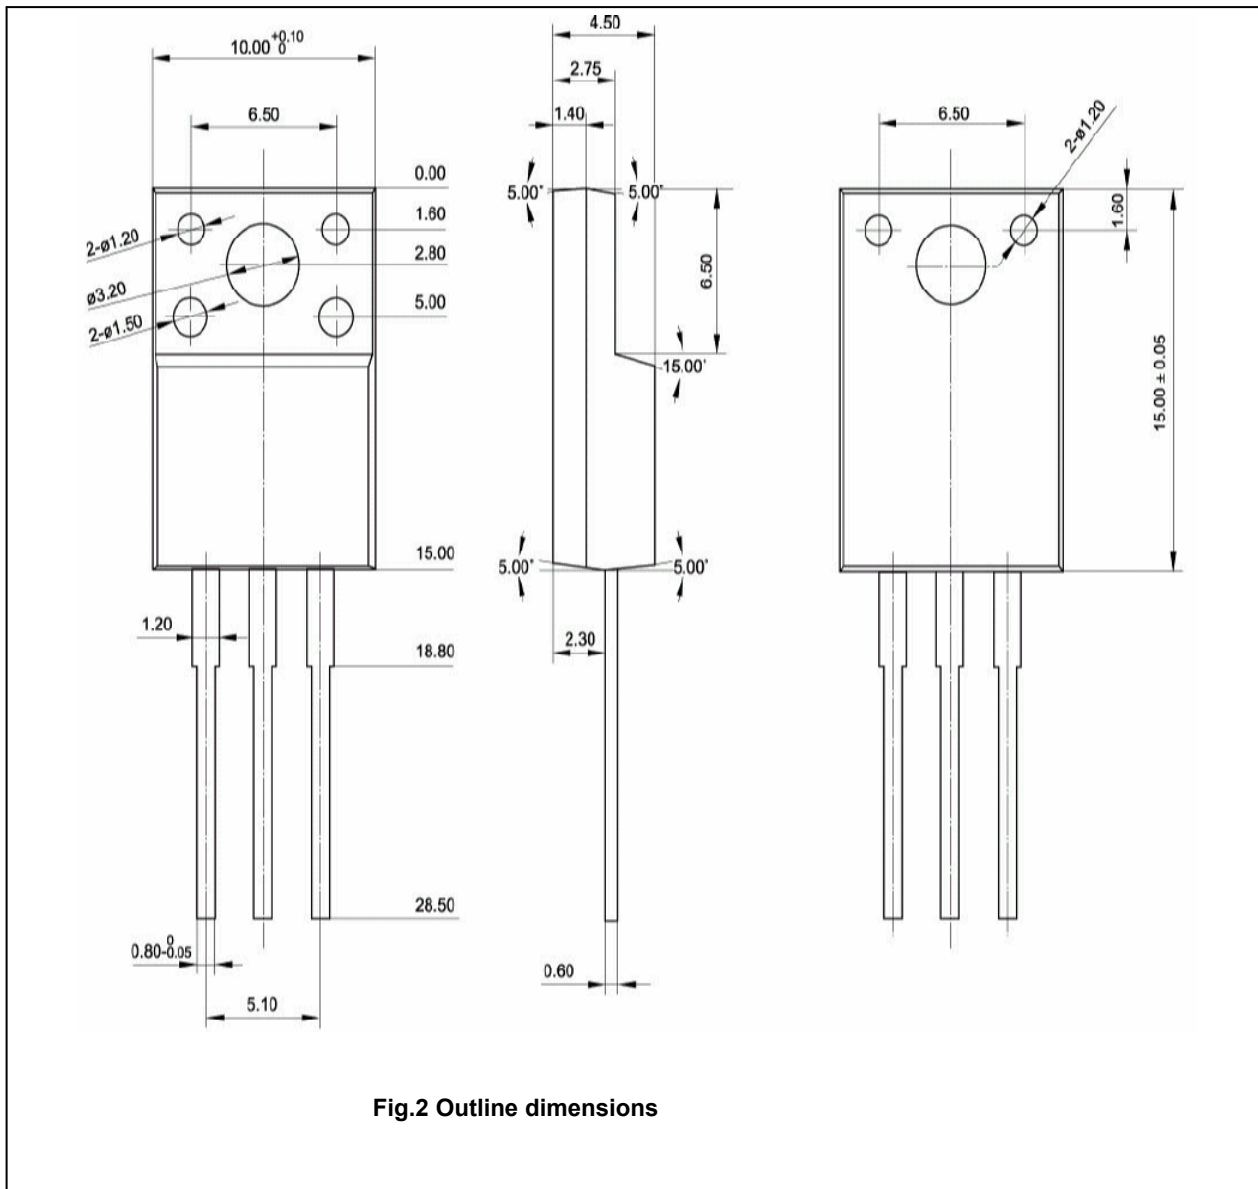


Fig.2 Outline dimensions

Silicon NPN Power Transistors

2SC4073

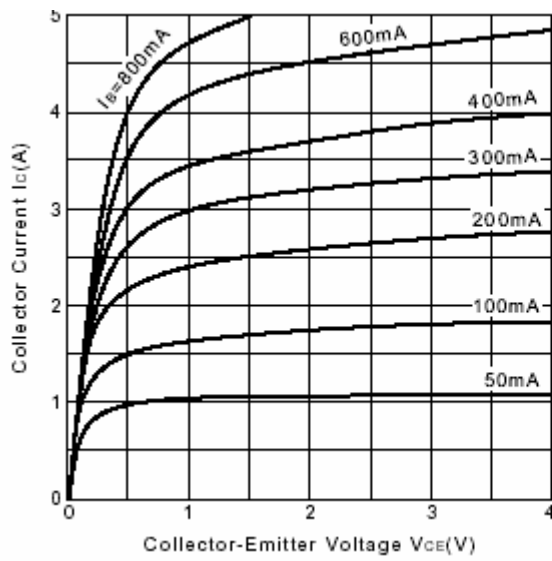


Fig.3 Static Characteristic

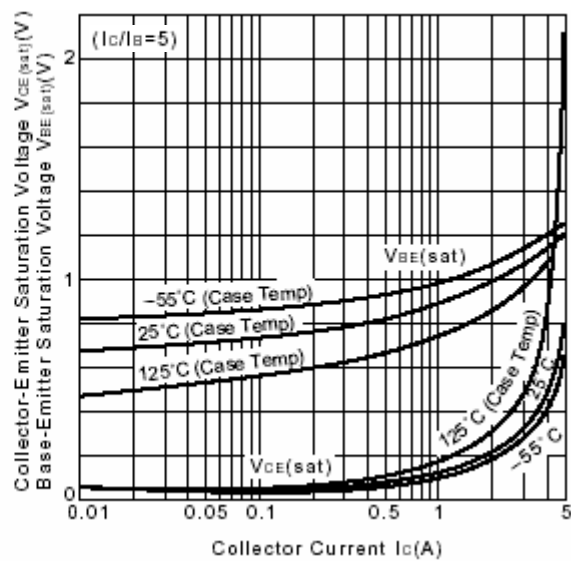


Fig.4 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

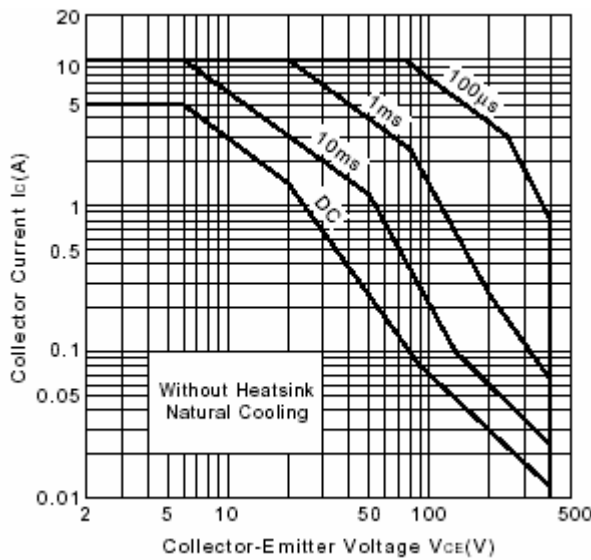


Fig.5 Safe Operating Area

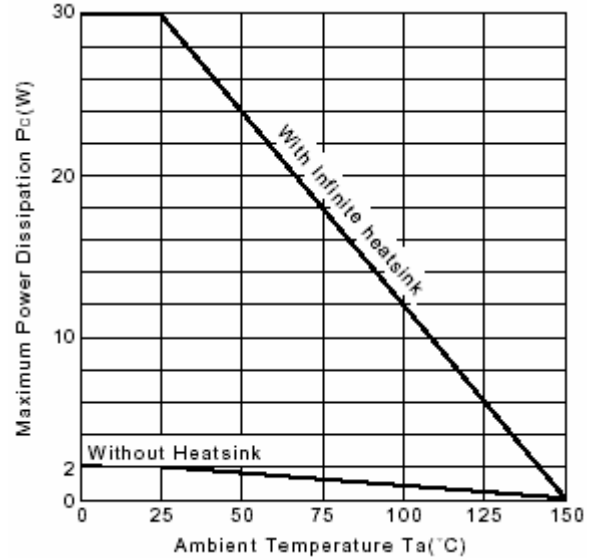


Fig.6 Pc-Ta Derating

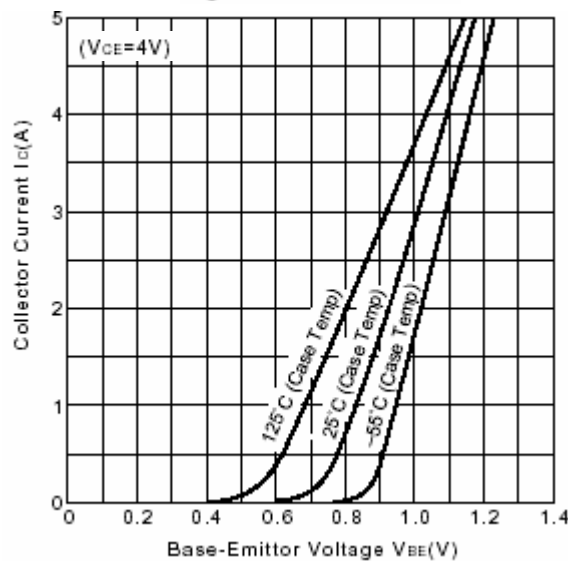


Fig.7 $I_c - V_{BE}$

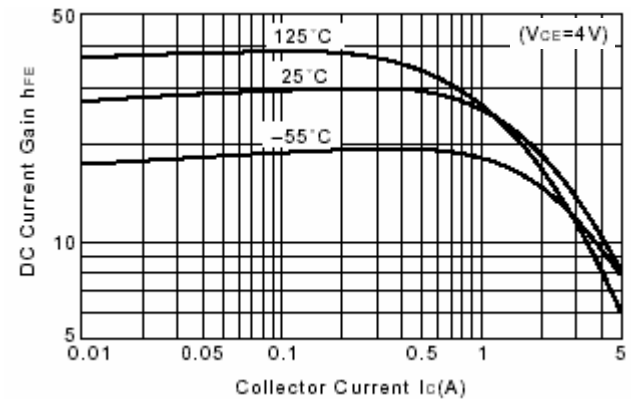


Fig.8 DC current Gain