



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

**SURFACE MOUNT
NPN Switching Transistor**

VOLTAGE 80 Volts CURRENT 1 Ampere

CHT3019GP

APPLICATION

- * Telephony and professional communication equipment.
- * Other switching applications.

FEATURE

- * Small surface mounting type. (SOT-23)
- * Suitable for high packing density.
- * High saturation current capability.
- * Voltage controlled small signal switch.


CONSTRUCTION

- * NPN Switching Transistor


MARKING

- * HT

CIRCUIT



SOT-23

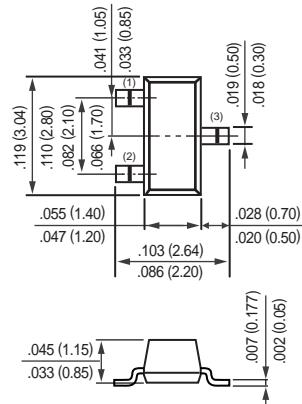

Dimensions in millimeters

SOT-23

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	120	V
V_{CEO}	collector-emitter voltage	open base	—	80	V
V_{EBO}	emitter-base voltage	open collector	—	7.0	V
I_C	collector current (DC)		—	1000	mA
I_{CM}	peak collector current		—	1500	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25^\circ\text{C}$; note 1	—	350	mW
T_{stg}	storage temperature		-65	+150	°C
T_j	junction temperature		—	150	°C
T_{amb}	operating ambient temperature		-65	+150	°C

Note

1. Transistor mounted on an FR4 printed-circuit board.

RATING CHARACTERISTIC CURVES (CHT3019GP)

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-a}$	thermal resistance from junction to ambient	note 1	357	K/W

Note

- Transistor mounted on an FR4 printed-circuit board.

CHARACTERISTICS

$T_{amb} = 25^\circ C$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0; V_{CB} = 90\ V$	–	10	nA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = 5\ V$	–	10	nA
h_{FE}	DC current gain	$I_C = 0.1\ mA; V_{CE} = 10V$ $I_C = 1.0\ mA; V_{CE} = 10V$ $I_C = 150\ mA; V_{CE} = 10V$ $I_C = 500\ mA; V_{CE} = 10V$ $I_C = 1.0\ A; V_{CE} = 10V$	50 90 100 50 15	– – 300 – –	
V_{CEsat}	collector-emitter saturation voltage	$I_C = 150\ mA; I_B = 15\ mA$ $I_C = 500\ mA; I_B = 50\ mA$	– –	0.2 0.5	V
V_{BEsat}	base-emitter saturation voltage	$I_C = 150\ mA; I_B = 15\ mA$	–	1.1	V
C_{ob}	collector capacitance	$I_E = i_e = 0; V_{CB} = 1.0\ V; f = 1\ MHz$	–	12	pF
C_{ib}	emitter capacitance	$I_C = i_c = 0; V_{BE} = 500\ mV; f = 1\ MHz$	–	60	pF
f_T	transition frequency	$I_C = 50\ mA; V_{CE} = 1.0\ V; f = 1.0\ MHz$	100	–	MHz
F	noise figure	$I_C = 100\ \mu A; V_{CE} = 1.0\ V; R_S = 1\ k\Omega; f = 1.0\ kHz$	–	4.0	dB