

Description

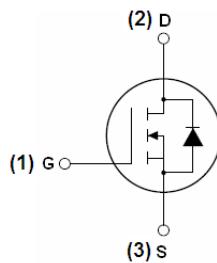
The G2005 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.

General Features

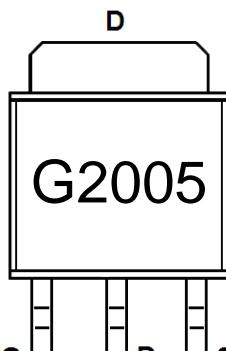
- $V_{DS} = 200V, I_D = 5A$
- $R_{DS(ON)} < 580m\Omega @ V_{GS}=10V$ (Typ:520m Ω)
- High density cell design for ultra low Rdson
- Fully characterized avalanche voltage and current
- Excellent package for good heat dissipation

Application

- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply



Schematic diagram



Marking and pin assignment



TO-251 top view

Thermal Characteristic

Thermal Resistance,Junction-to-Ambient ^(Note 2)	$R_{\theta JA}$	4.17	°C/W
--	-----------------	------	------

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise noted)

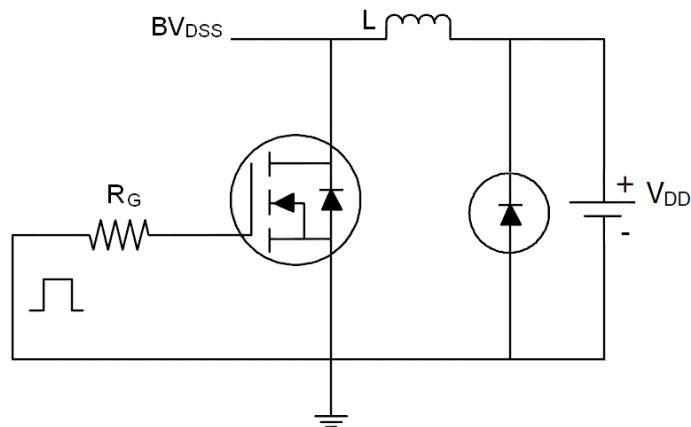
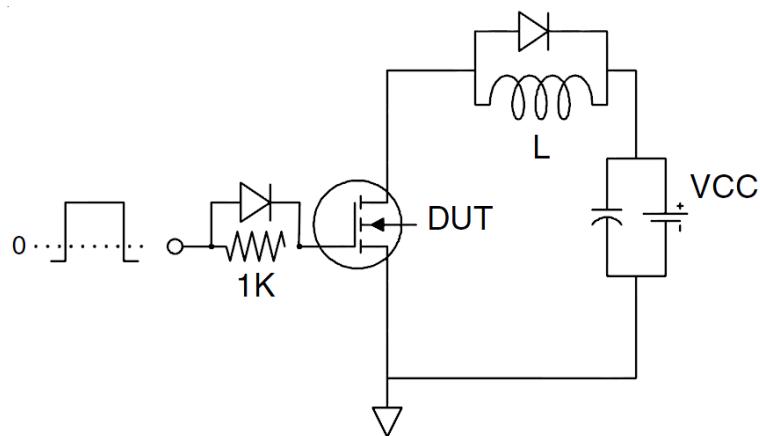
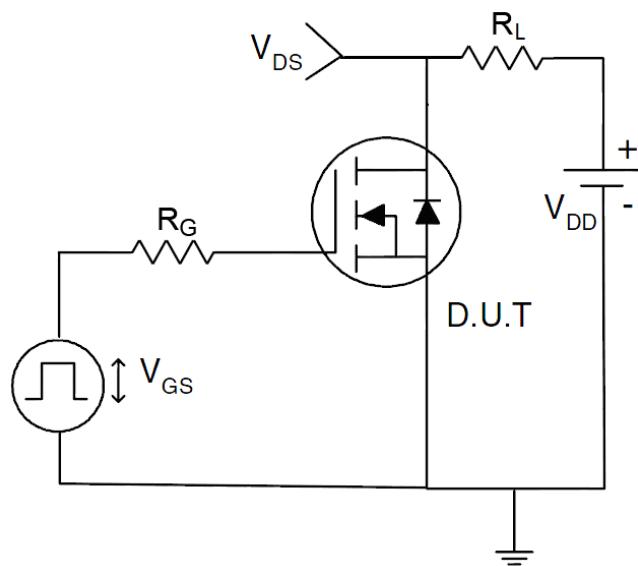
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	200	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	5	A
Drain Current-Pulsed ^(Note 1)	I_{DM}	20	A
Maximum Power Dissipation	P_D	30	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	°C

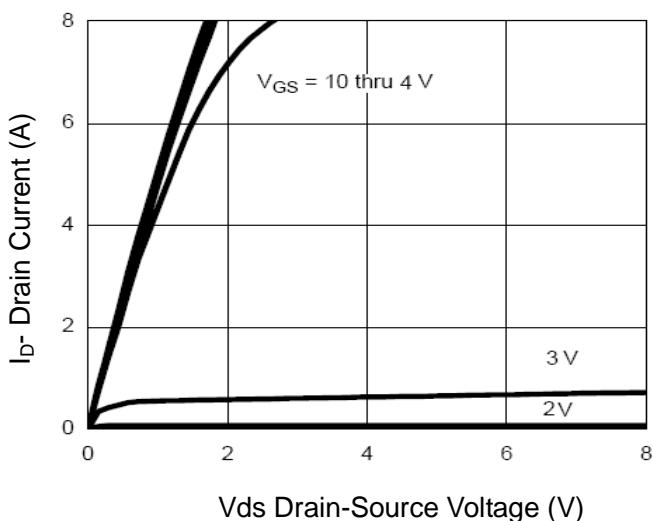
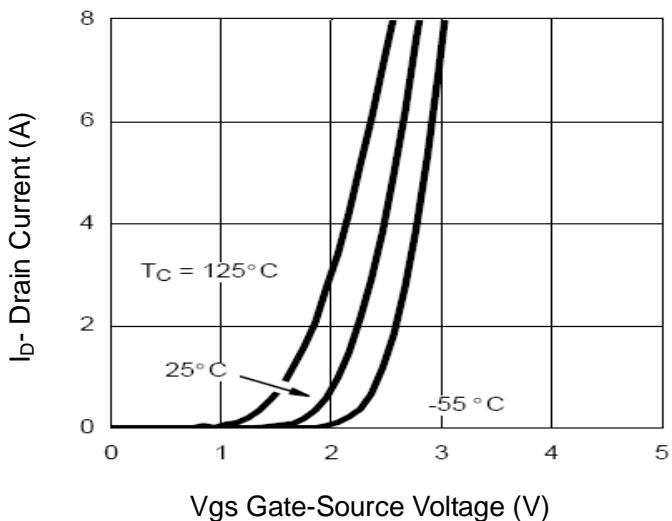
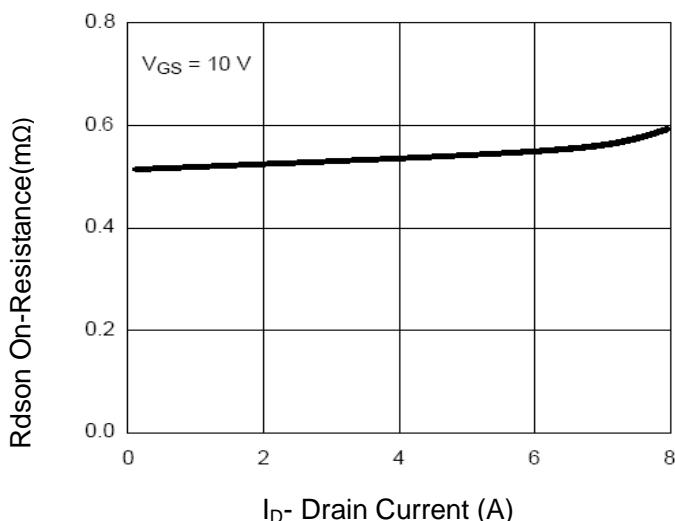
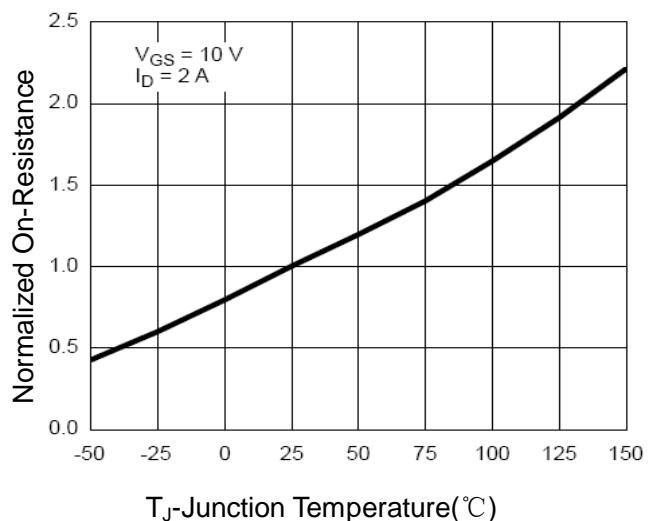
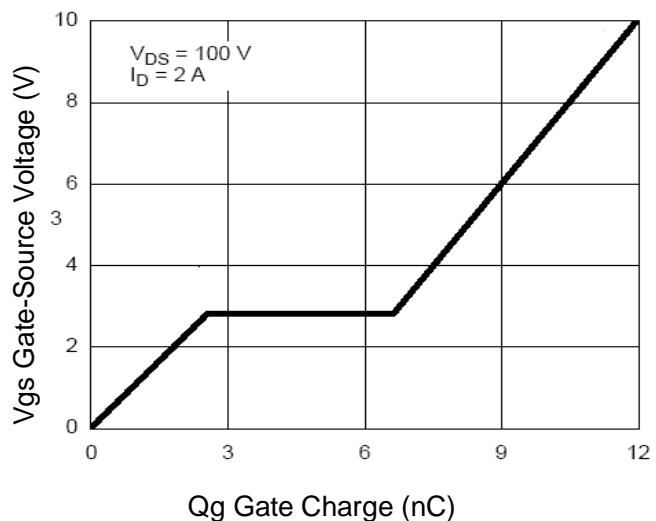
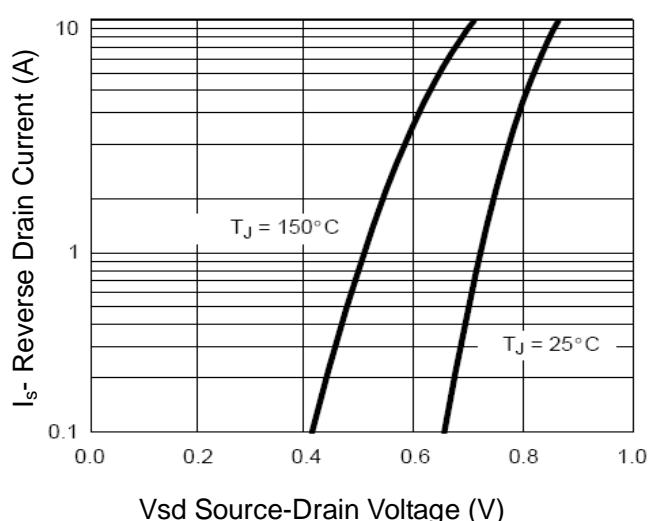
Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	200	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}}=200\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
On Characteristics <small>(Note 3)</small>						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1.2	1.7	2.5	V
Drain-Source On-State Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=2\text{A}$	-	520	580	$\text{m}\Omega$
Forward Transconductance	g_{FS}	$V_{\text{DS}}=15\text{V}, I_{\text{D}}=2\text{A}$	-	8	-	S
Dynamic Characteristics <small>(Note 4)</small>						
Input Capacitance	C_{iss}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, F=1.0\text{MHz}$	-	580	-	PF
Output Capacitance	C_{oss}		-	90	-	PF
Reverse Transfer Capacitance	C_{rss}		-	3	-	PF
Switching Characteristics <small>(Note 4)</small>						
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=100\text{V}, R_{\text{L}}=15\Omega$ $V_{\text{GS}}=10\text{V}, R_{\text{G}}=2.5\Omega$	-	10	-	nS
Turn-on Rise Time	t_{r}		-	12	-	nS
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$		-	15	-	nS
Turn-Off Fall Time	t_{f}		-	15	-	nS
Total Gate Charge	Q_{g}	$V_{\text{DS}}=100\text{V}, I_{\text{D}}=2\text{A}, V_{\text{GS}}=10\text{V}$	-	12	-	nC
Gate-Source Charge	Q_{gs}		-	2.5	-	nC
Gate-Drain Charge	Q_{gd}		-	3.8	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage <small>(Note 3)</small>	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{s}}=2\text{A}$	-	-	1.2	V
Diode Forward Current <small>(Note 2)</small>	I_{s}		-	-	5	A

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production

Test Circuit
1) E_{AS} test circuit

2) Gate charge test circuit

3) Switch Time Test Circuit


Typical Electrical and Thermal Characteristics (Curves)

Figure 1 Output Characteristics

Figure 2 Transfer Characteristics

Figure 3 Rdson- Drain Current

Figure 4 Rdson-JunctionTemperature

Figure 5 Gate Charge

Figure 6 Source- Drain Diode Forward

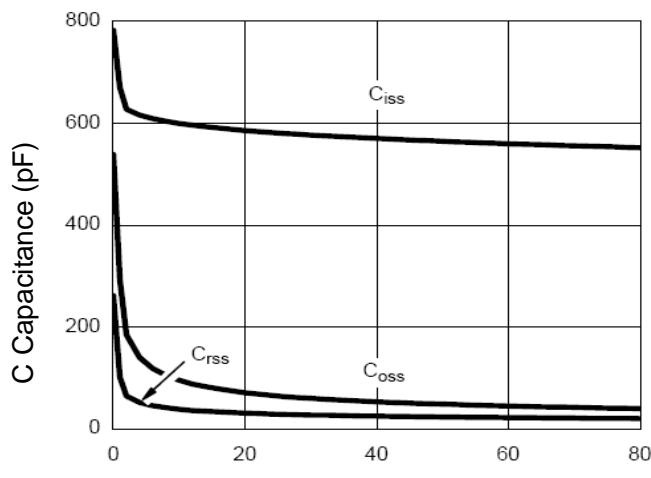


Figure 7 Capacitance vs Vds

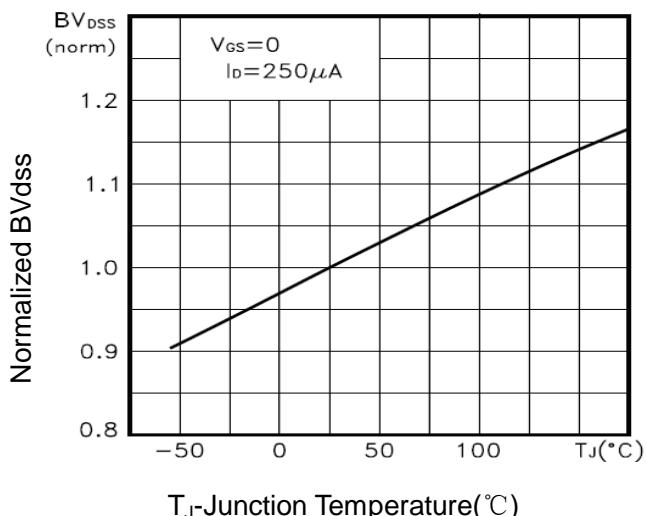


Figure 9 BV_{DSS} vs Junction Temperature

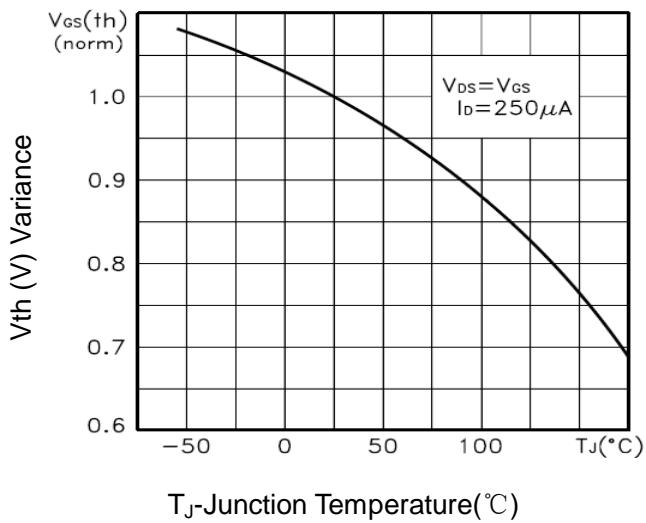


Figure 10 $V_{GS(th)}$ vs Junction Temperature

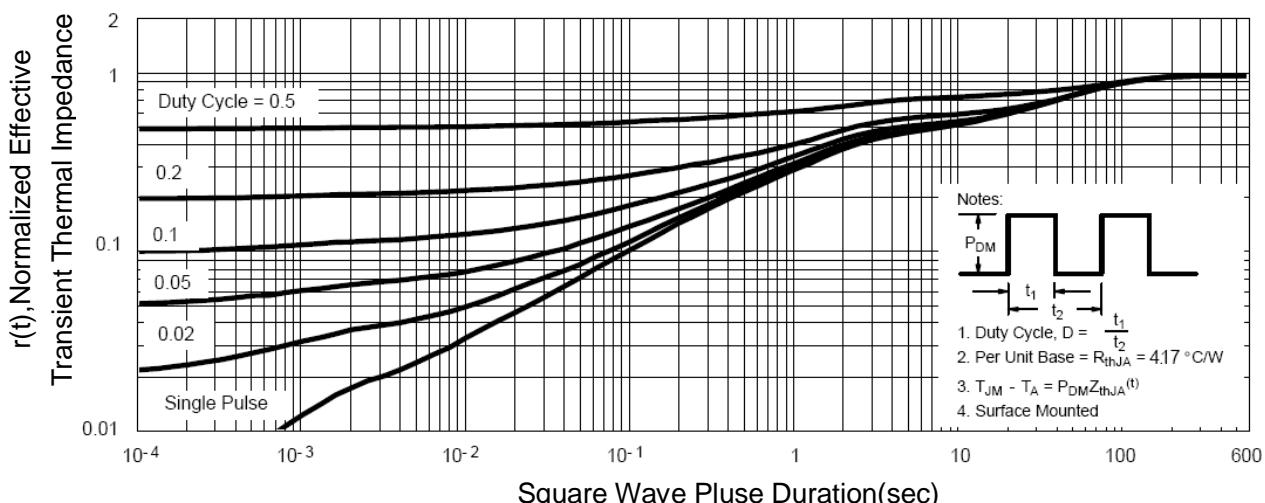


Figure 11 Normalized Maximum Transient Thermal Impedance