


Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ 440A
 V_{DRM}/V_{RRM} 4500~5500V
 I_{TSM} 4.5 kA
 I^2t 101 10³A²S

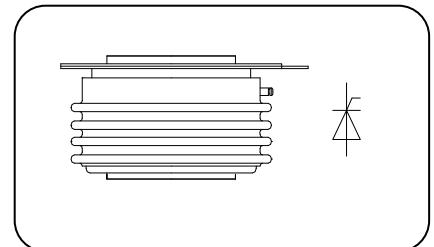

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled	125			550	A
						440	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$ tp=10ms $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$	125	4500		5500	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM}=V_{DRM}$ $V_{RM}=V_{RRM}$	125			150	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			4.5	kA
I^2t	I^2T for fusing coordination					101	A ² s*10 ³
V_{TO}	Threshold voltage		125			1.08	V
r_T	On-state slop resistance					1.92	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1000A$, F=15kN	125			2.80	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}= 67\%V_{DRM}$ to 1300A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			100	A/μs
Q_{fr}	Recovery charge	$I_{TM}=1000A$, tp=2000μs, $di/dt=-5A/\mu s$, $V_R=50V$	125		2000		μC
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			25		200	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=0.67V_{DRM}$	125	0.3			V
$R_{th(j-C)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 15kN				0.035	°C /W
$R_{th(C-h)}$	Thermal resistance case to heatsink					0.008	°C /W
F_m	Mounting force			10	15	20	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				250		g
Outline		KT33cT					

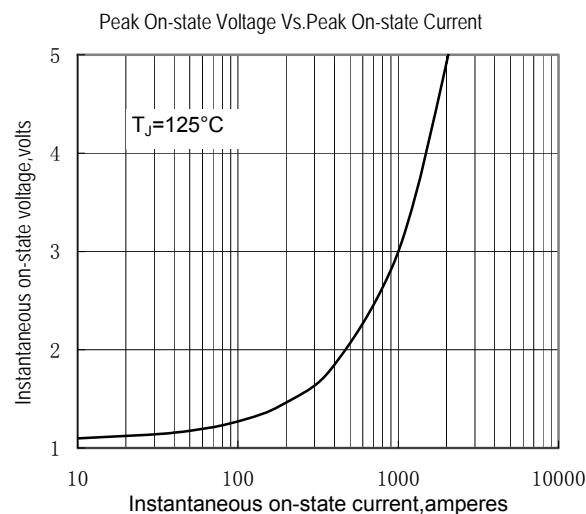


Fig.1

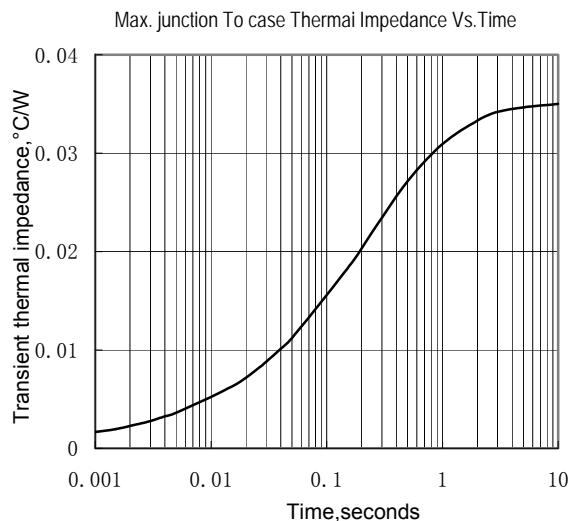


Fig.2

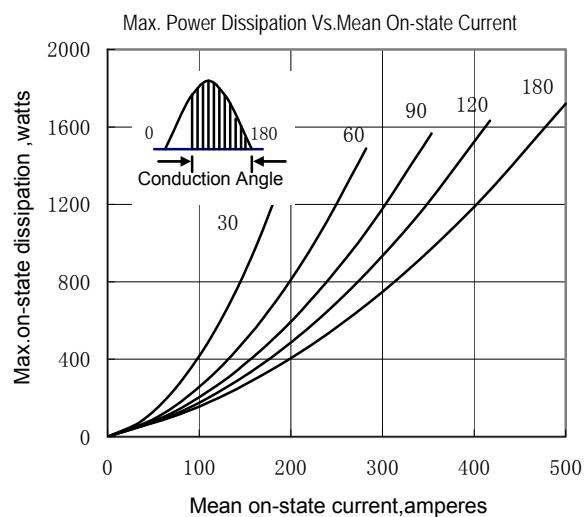


Fig.3

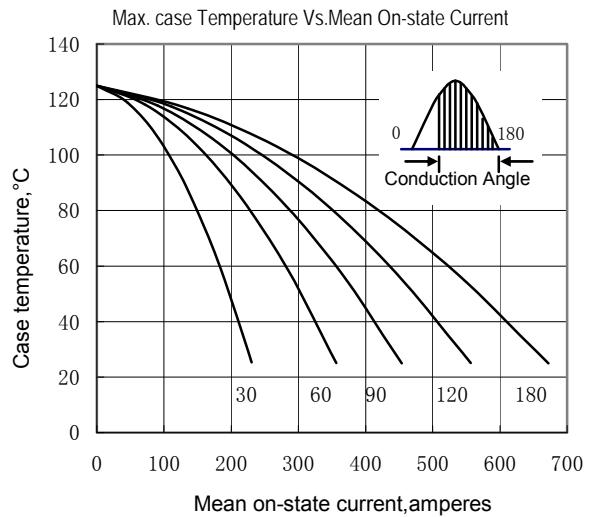


Fig.4

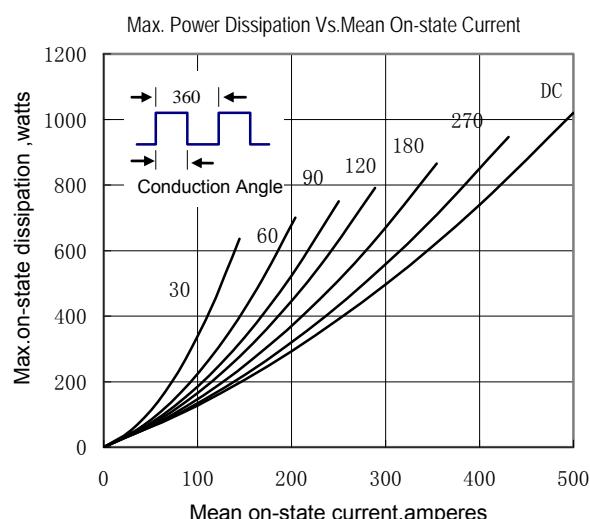


Fig.5

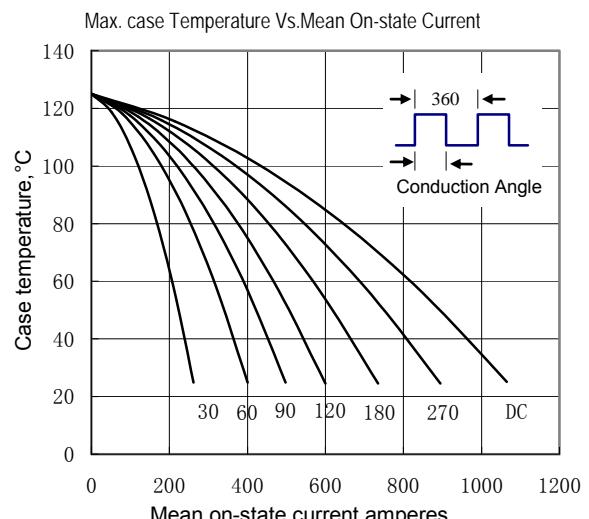


Fig.6

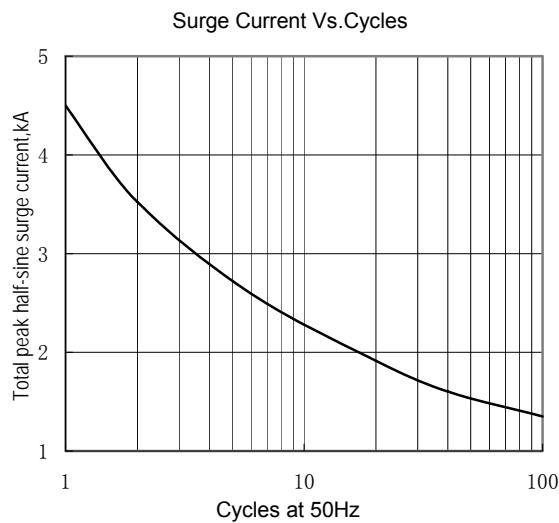


Fig.7

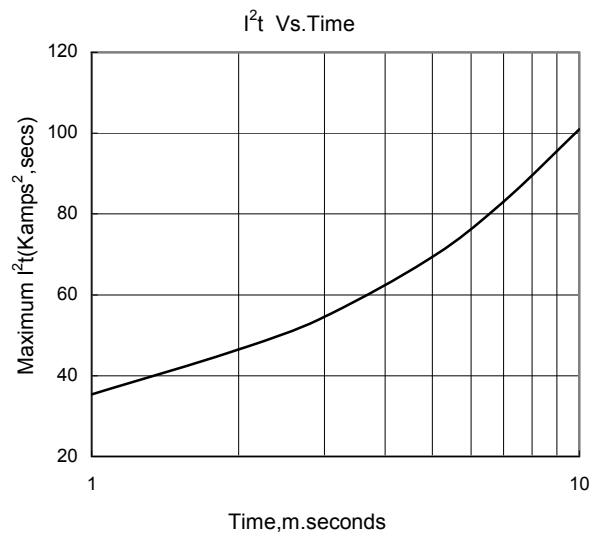


Fig.8

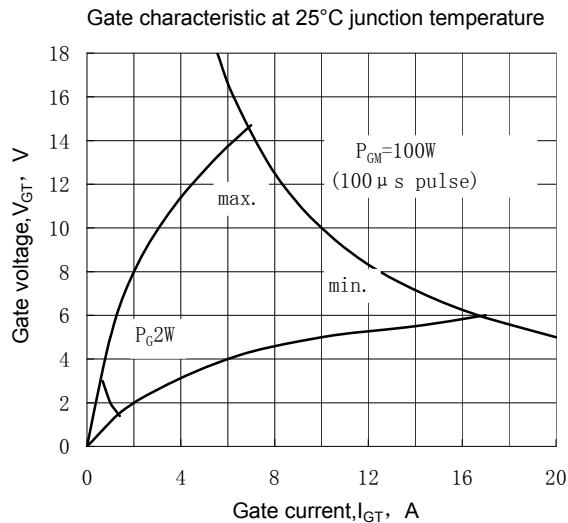


Fig.9

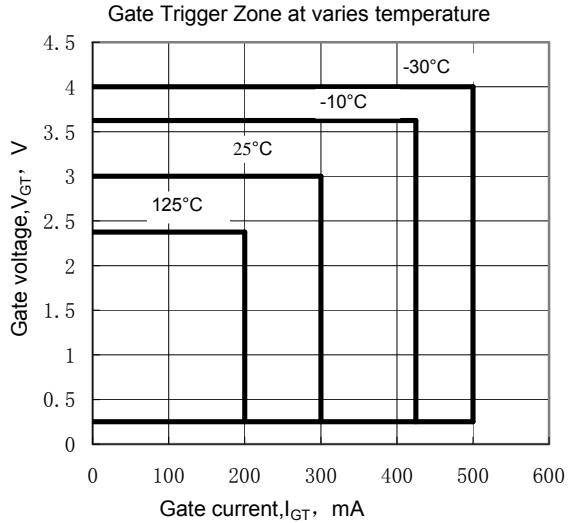


Fig.10

Outline: