

SiC Schottky Barrier Diode

SCS108AM

●Applications

Switching power supply


●Features

- 1) Shorter recovery time
- 2) Reduced temperature dependence
- 3) High-speed switching possible


●Construction

Silicon carbide epitaxial planer type

●Dimensions (Unit : mm)

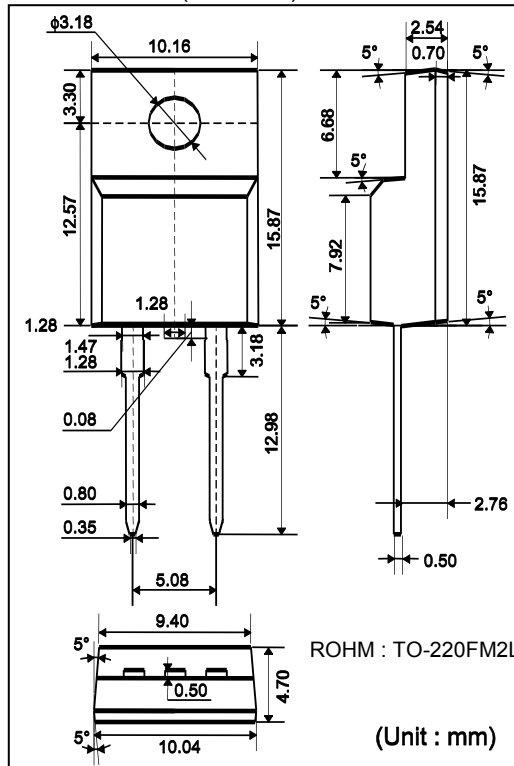

●Structure



●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Reverse voltage (repetitive)	V_{RM}	600	V
Reverse voltage (DC)	V_R	600	V
Continuous forward current	I_F	8*1	A
Surge no repetitive forward current	I_{FSM}	29*2	A
		110*3	A
Repetitive peak forward current	I_{FRM}	20*4	A
Total power dissipation	P_D	27*5	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C
Junction to case	$R_{th(j-c)}$	4.6	°C / W

(*1) $T_c=82^\circ\text{C}$ (*2) $PW=8.3\text{ms}$ sinusoidal, $T_j=25^\circ\text{C}$ (*3) $PW=10\mu\text{s}$ square, $T_j=25^\circ\text{C}$

(*4) $T_c=95^\circ\text{C}$, $T_j=125^\circ\text{C}$, Duty cycle=10% (*5) $T_c=25^\circ\text{C}$

●Electrical characteristics (Ta=25°C) [Per Leg]

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
DC blocking voltage	V_{DC}	600	-	-	V	$I_R=0.16\text{mA}$
Forward voltage	V_F	-	1.5	1.7	V	$I_F=8\text{A}$, $T_j=25^\circ\text{C}$
		-	1.6	-	V	$I_F=8\text{A}$, $T_j=150^\circ\text{C}$
Reverse current	I_R	-	1.6	160	μA	$V_R=600\text{V}$, $T_j=25^\circ\text{C}$
		-	8	-	μA	$V_R=600\text{V}$, $T_j=150^\circ\text{C}$
Total capacitance	C	-	345	-	pF	$V_R=1\text{V}$, $f=1\text{MHz}$
		-	38	-	pF	$V_R=600\text{V}$, $f=1\text{MHz}$
Total capacitive charge	Q_c	-	15	-	nC	$V_R=400\text{V}$, $di/dt=300\text{A}/\mu\text{s}$
Switching time	t_c	-	15	-	ns	$V_R=400\text{V}$, $di/dt=300\text{A}/\mu\text{s}$

Fig.1 V_F - I_F Characteristics

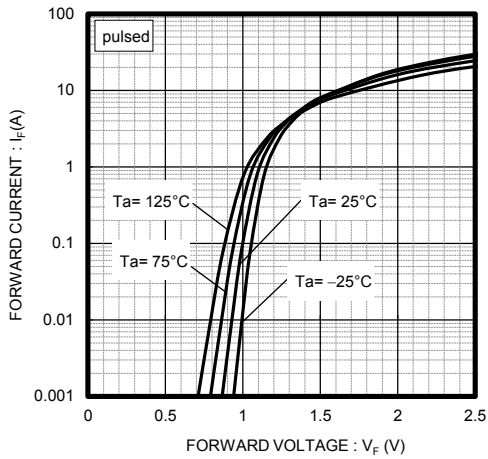


Fig.2 V_F - I_F Characteristics

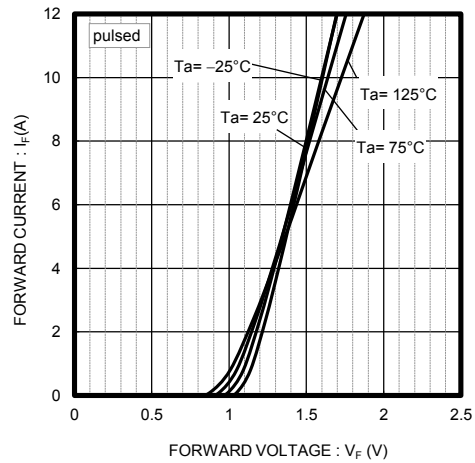


Fig.3 V_R - I_R Characteristics

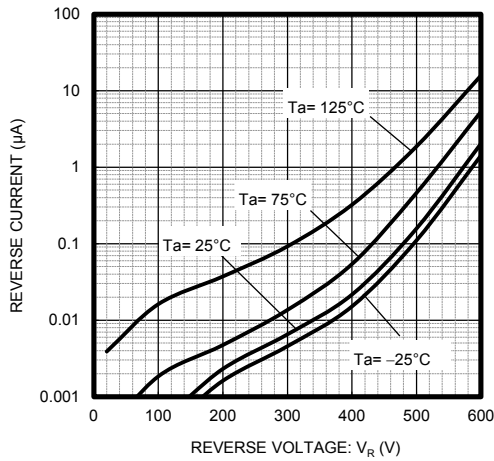


Fig.4 V_R - C_t Characteristics

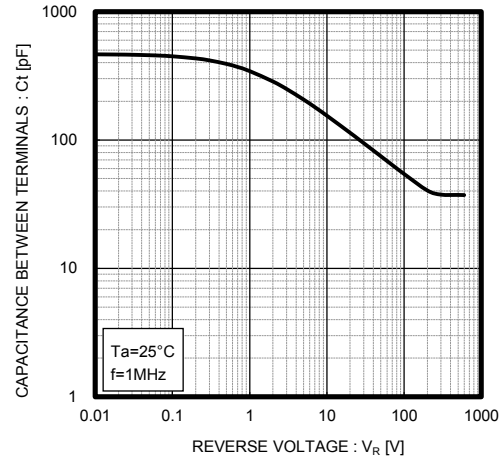


Fig.5 Thermal Resistance vs. Pulse Width




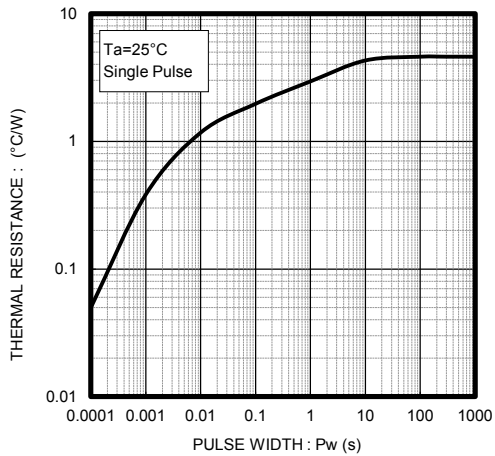


Fig.6 Power Dissipation

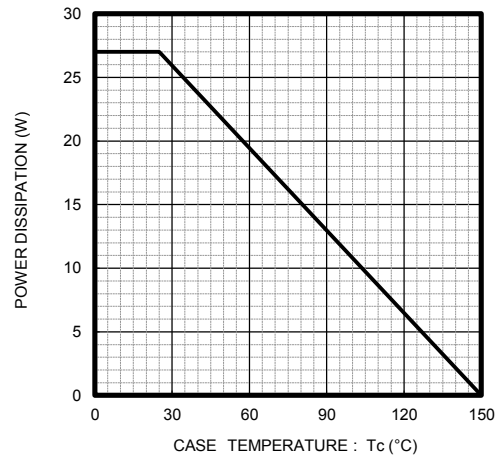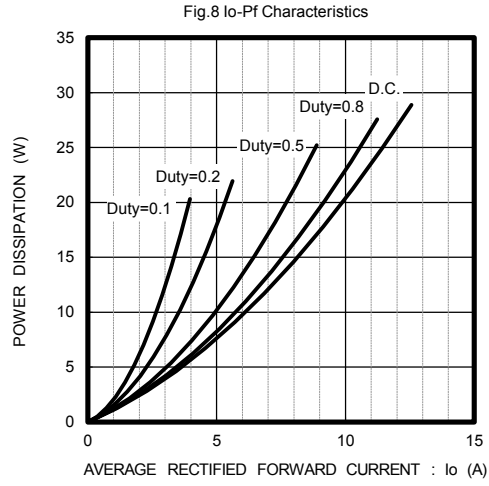

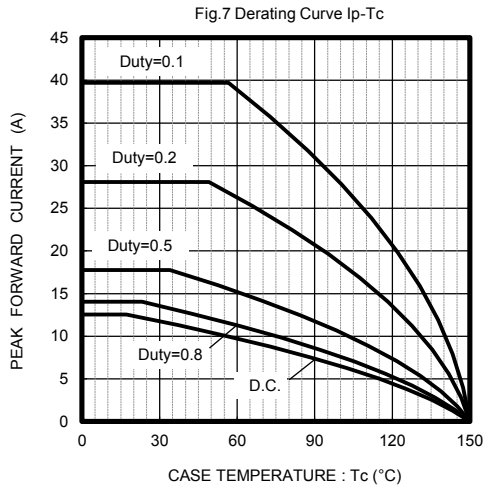

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>