




MEDIUM CURRENT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage 20 to 100 Volts, Forward Current 5.0 Ampere

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3Kg) tension

DO-201AD

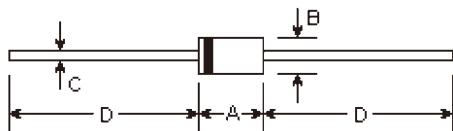

Mechanical Data

- **Case:** DO-201AD molded plastic body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.041 ounce, 1.15 grams

DIM	DIMENSIONS				Note	
	inches		mm			
	Min.	Max.	Min.	Max.		
A	0.283	0.374	7.20	9.50		
B	0.189	0.208	4.80	5.30	Φ	
C	0.048	0.051	1.20	1.30	Φ	
D	1.000	-	25.40	-		

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SB520	SB530	SB540	SB550	SB560	SB570	SB580	SB590	SB5B0	Units		
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	Volts		
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	Volts		
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	Volts		
Maximum average forward rectified current 0.375" (9.5mm) lead length (see Fig. 1)	$I_{(AV)}$	5.0								Amps			
Peak forward surge current, 10mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method) at rated T_L	I_{FSM}	150.0								Amps			
Maximum instantaneous forward voltage at 5.0A (Note 1)	V_F	0.55		0.70		0.85		Volts					
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1) $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	0.5 50.0		0.5 25.0		0.5 25.0		mA					
Typical thermal resistance (Note 2)	$R_{(t)JA}$ $R_{(t)JL}$	25.0 8.0								°C/W			
Operating junction temperature range	T_J	-65 to +125		-65 to +150				°C					
Storage temperature range	T_{STG}	-65 to +150								°C			

Notes:

(1) Pulse test: 300uS pulse width, 1% duty cycle

(2) Thermal resistance junction to lead vertical P.C.B. mounted, 0.500" (12.7mm) lead length with 2.5X2.5" (63.5X63.5mm)

RATINGS AND CHARACTERISTIC CURVES
