

General Purpose Rectifier


■ Features

- I_o 6A
- V_{RRM} 50V-1000V
- High surge current capability

■ Applications

- Rectifier

■ Outline Dimensions and Mark

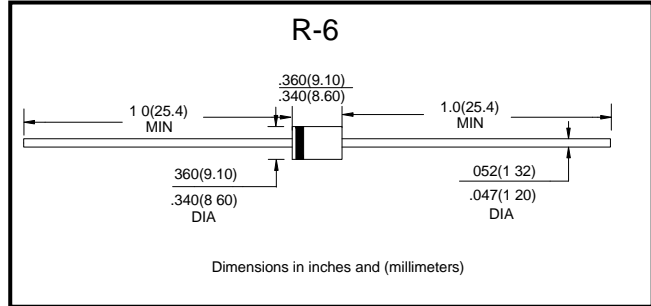

■ Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	6A						
				05	1	2	4	6	8	10
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, $T_a=50^\circ\text{C}$	6						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$	400						
Junction Temperature	T_J	$^\circ\text{C}$		-55~+150						
Storage Temperature	T_{STG}	$^\circ\text{C}$		-55 ~ +150						

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=6.0A$		1.1
Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$	10
	I_{RRM2}			$T_a=125^\circ\text{C}$	100

■ Characteristics(Typical)

