

用途：用于高功率 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点：低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings (Ta=25°C)

参数符号 Symbol	数值 Rating	单位 Unit
V _{DSS}	600	V
I _D (Tc=25°C)	1.0	A
I _D (Tc=100°C)	0.6	A
I _{DM}	3.0	A
V _{GSS}	±30	V
E _{AS}	50	mJ
E _{AR}	2.8	mJ
I _{AR}	1.0	A
P _D (Tc=25°C)	30	W
T _J , T _{STG}	-55 to 150	°C

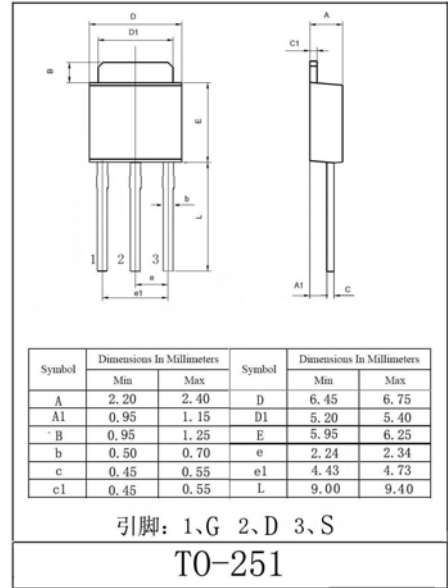

电性能参数/Electrical Characteristics (Ta=25°C)

参数符号 Symbol	测试条件 Test Conditions		最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV _{DSS}	V _{GS} =0V	I _D =250 μA	600			V
I _{DSS}	V _{DS} =600V	V _{GS} =0V			10	μA
	V _{DS} =480V	T _C =125°C			100	μA
I _{GSS}	V _{GS} =±30V	V _{DS} =0V			±0.1	μA
V _{GS(th)}	V _{DS} =V _{GS}	I _D =250 μA	2.0		4.0	V
R _{DS(on)}	V _{GS} =10V	I _D =0.5A		9.7	12	Ω
g _{FS}	V _{DS} =40V	I _D =0.5A		0.97		S
V _{SD}	V _{GS} =0V	I _S =1.0A			1.4	V
C _{iss}	V _{DS} =25V V _{GS} =0V f=1.0MHz			155	200	pF
C _{oss}				20	26	pF
C _{rss}				3.0	4.0	pF
t _{d(on)}	V _{DD} =300V I _D =1.2A R _G =50 Ω			10	30	ns
t _r				20	50	ns
t _{d(off)}				16	45	ns
t _f				25	60	ns

