



STU/D5025NL2

SamHop Microelectronics Corp.


Ver 1.0

N-Channel Logic Level Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY		
VDSS	ID	RDS(ON) (mΩ) Max
25V	50A	9.5 @ VGS=10V
		15 @ VGS=4.5V

FEATURES

- Super high dense cell design for low RDS(ON).
- Rugged and reliable.
- Surface Mount Package.

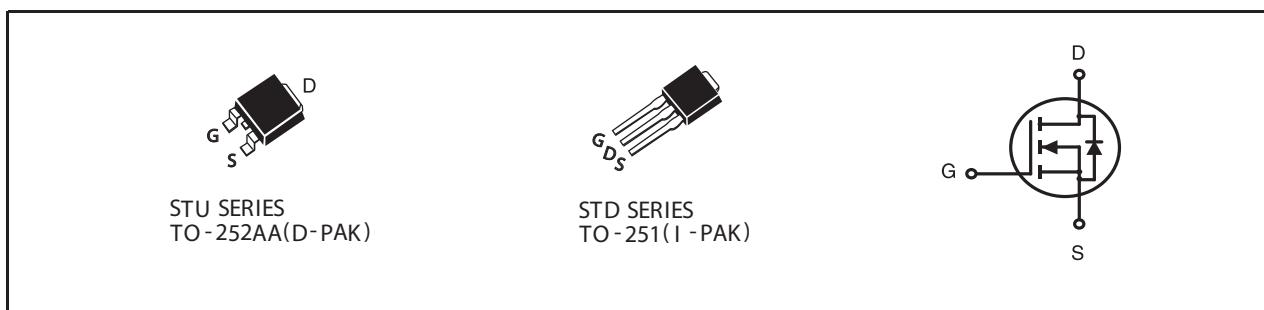

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Limit	Units
V_{DS}	Drain-Source Voltage	25	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-Continuous ^a	50	A
	$T_C=25^\circ\text{C}$	50	A
	$T_C=70^\circ\text{C}$	40	A
I_{DM}	-Pulsed ^b	147	A
E_{AS}	Single Pulse Avalanche Energy ^d	20	mJ
P_D	Maximum Power Dissipation ^a	42	W
	$T_C=25^\circ\text{C}$	42	W
	$T_C=70^\circ\text{C}$	27	W
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 to 150	°C

THERMAL CHARACTERISTICS

$R_{\theta JC}$	Thermal Resistance, Junction-to-Case ^a	3	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient ^a	50	°C/W

STU/D5025NL2

Ver 1.0

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	25			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =20V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1.0	1.8	3.0	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =25A		7.8	9.5	m ohm
		V _{GS} =4.5V , I _D =20A		11.5	15	m ohm
g _{FS}	Forward Transconductance	V _{DS} =10V , I _D =25A		14		S
DYNAMIC CHARACTERISTICS ^c						
C _{iss}	Input Capacitance	V _{DS} =15V,V _{GS} =0V f=1.0MHz		570		pF
C _{oss}	Output Capacitance			225		pF
C _{rss}	Reverse Transfer Capacitance			145		pF
SWITCHING CHARACTERISTICS ^c						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =15V I _D =1A V _{GS} =10V R _{GEN} =6 ohm		12		ns
t _r	Rise Time			20		ns
t _{D(OFF)}	Turn-Off Delay Time			17		ns
t _f	Fall Time			37		ns
Q _g	Total Gate Charge	V _{DS} =15V,I _D =25A,V _{GS} =10V		12.5		nC
		V _{DS} =15V,I _D =25A,V _{GS} =4.5V		6.5		nC
Q _{gs}	Gate-Source Charge	V _{DS} =15V,I _D =25A, V _{GS} =10V		1.5		nC
Q _{gd}	Gate-Drain Charge			3.5		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
I _s	Maximum Continuous Drain-Source Diode Forward Current			2		A
V _{SD}	Diode Forward Voltage ^b	V _{GS} =0V,I _s =4.5A		0.8	1.2	V

Notes

- a.Surface Mounted on FR4 Board,t ≤ 10sec.
- b.Pulse Test:Pulse Width ≤ 300us, Duty Cycle ≤ 2%.
- c.Guaranteed by design, not subject to production testing.
- d.Starting T_J=25°C,L=0.5mH,V_{DD} = 20V.(See Figure13)

Jun,30,2008

STU/D5025NL2

Ver 1.0

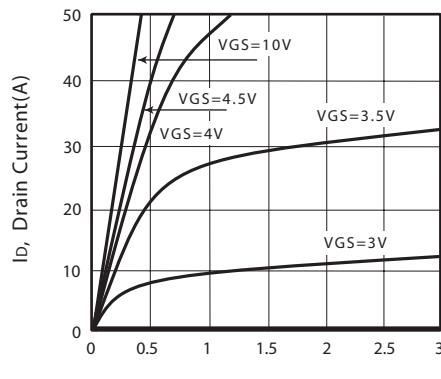


Figure 1. Output Characteristics

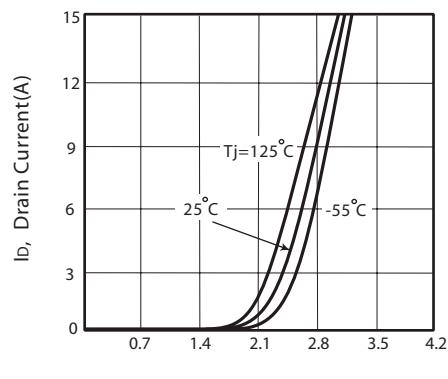


Figure 2. Transfer Characteristics

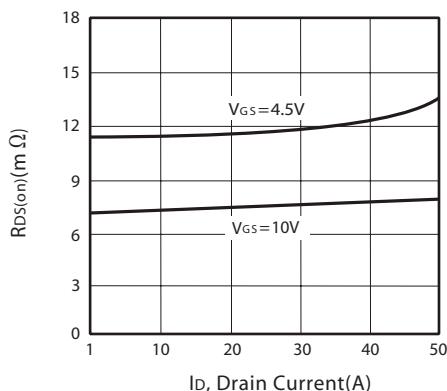


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

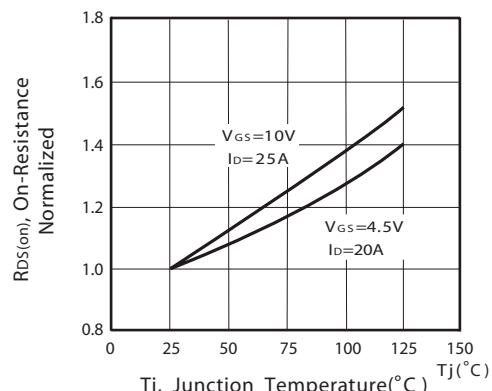


Figure 4. On-Resistance Variation with Drain Current and Temperature

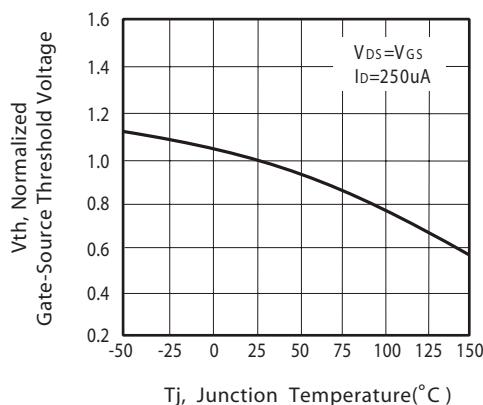


Figure 5. Gate Threshold Variation with Temperature


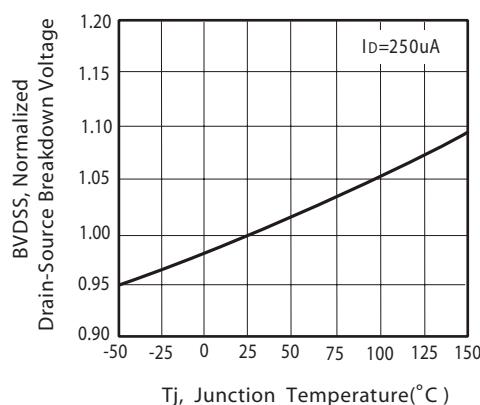


Figure 6. Breakdown Voltage Variation with Temperature


STU/D5025NL2

Ver 1.0

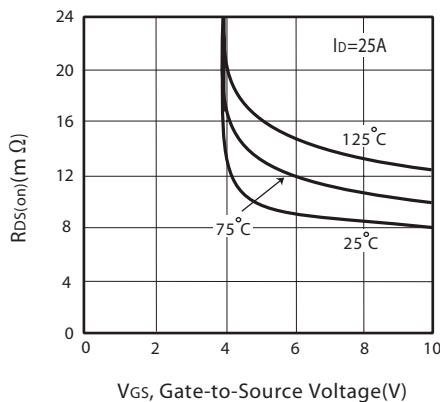


V_{GS}, Gate-to-Source Voltage(V)

Figure 7. On-Resistance vs. Gate-Source Voltage

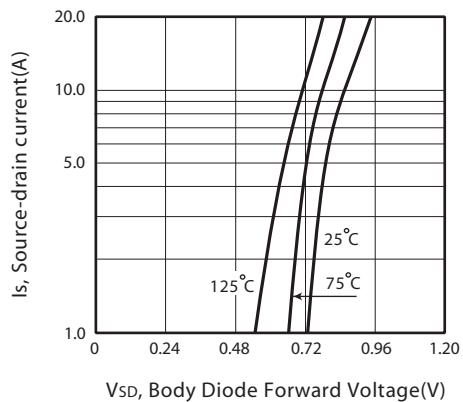


V_{SD}, Body Diode Forward Voltage(V)

Figure 8. Body Diode Forward Voltage Variation with Source Current

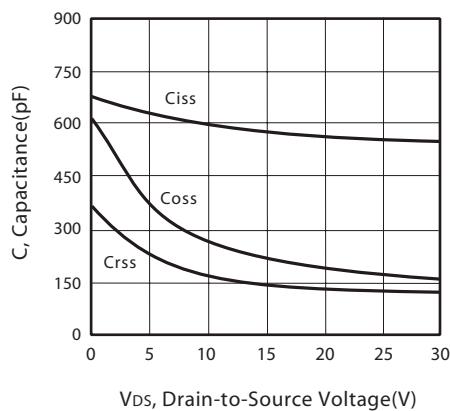

V_{DS}, Drain-to-Source Voltage(V)

Figure 9. Capacitance

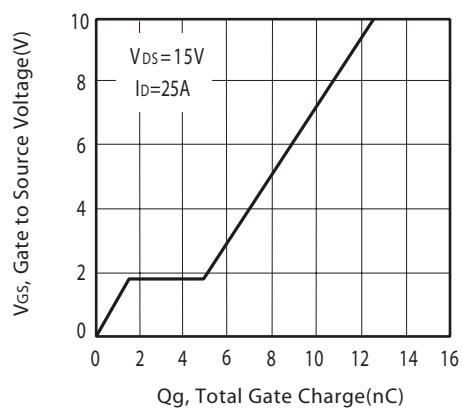

Q_g, Total Gate Charge(nC)

Figure 10. Gate Charge

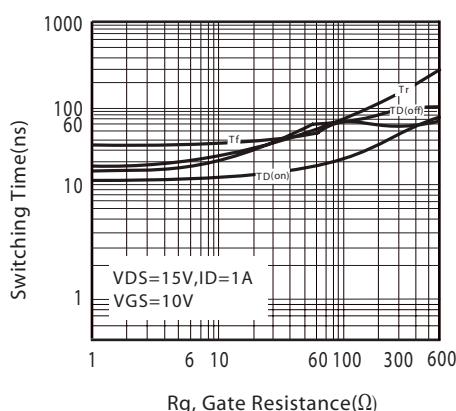


Figure 11. switching characteristics


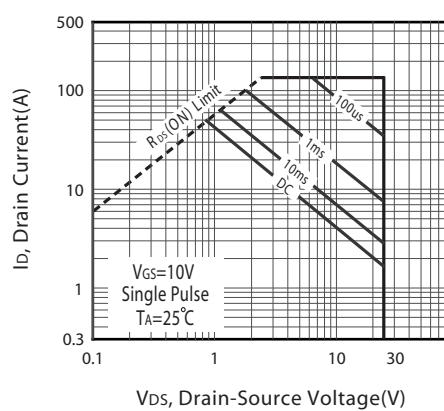


Figure 12. Maximum Safe Operating Area

Jun,30,2008


STU/D5025NL2

Ver 1.0

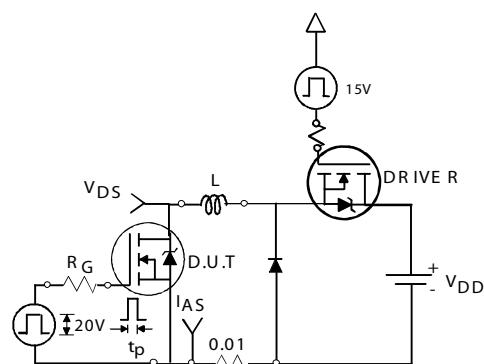

Unclamped Inductive Test Circuit

Figure 13a.

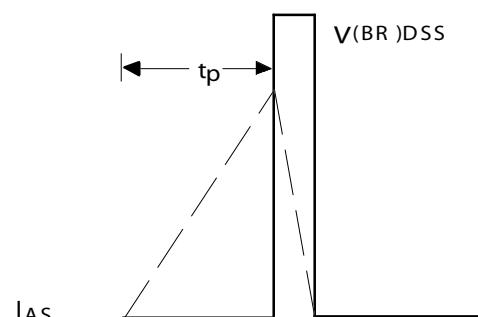

Unclamped Inductive Waveforms

Figure 13b.

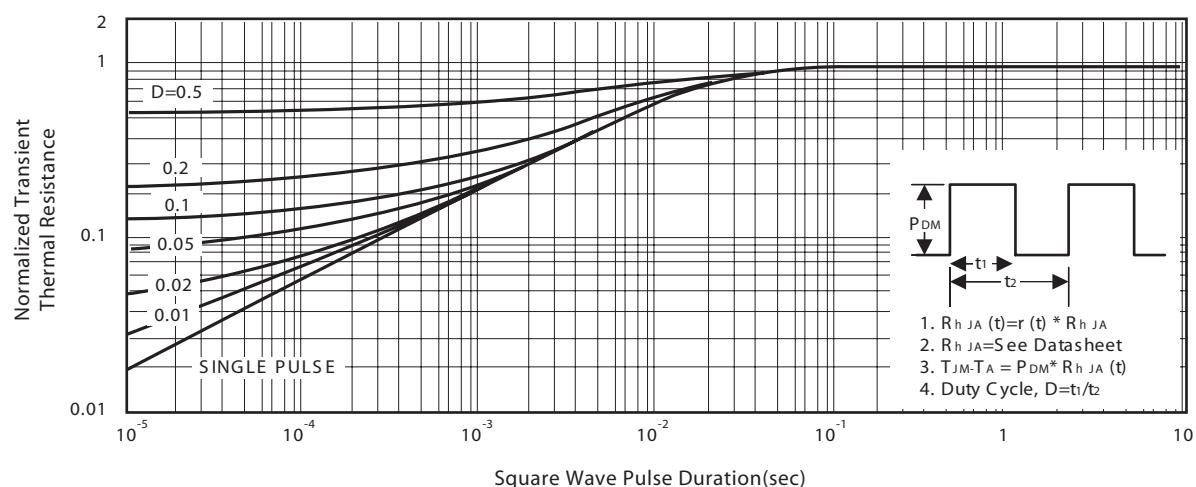



Figure 14. Normalized Thermal Transient Impedance Curve

STU/D5025NL2

Ver 1.0

PACKAGE OUTLINE DIMENSIONS

TO-251

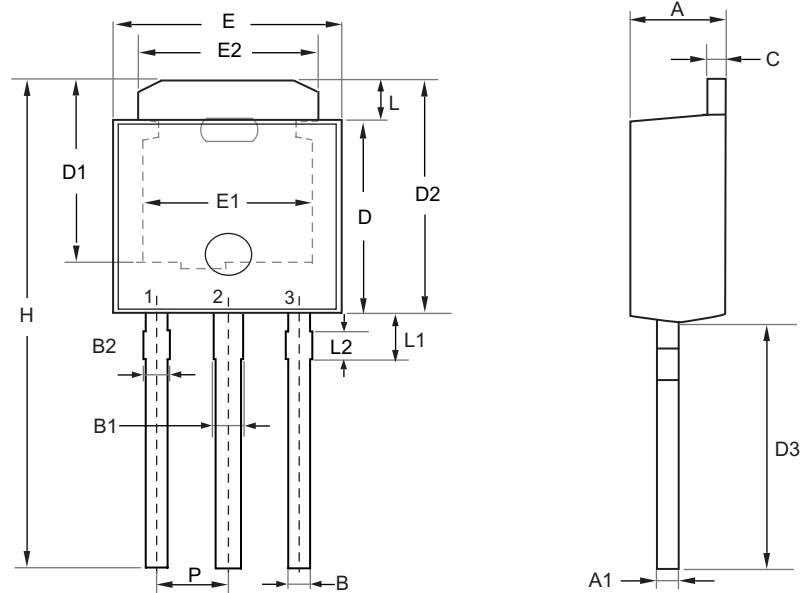


SYMBOL	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.100	2.500	0.083	0.098
A1	0.350	0.650	0.014	0.026
B	0.400	0.800	0.016	0.031
B1	0.650	1.050	0.026	0.041
B2	0.500	0.900	0.020	0.035
C	0.400	0.600	0.016	0.024
D	5.300	5.700	0.209	0.224
D1	4.900	5.300	0.193	0.209
D2	6.700	7.300	0.264	0.287
D3	7.000	8.000	0.276	0.315
H	13.700	15.300	0.539	0.602
E	6.300	6.700	0.248	0.264
E1	4.600	4.900	0.181	0.193
E2	4.800	5.200	0.189	0.205
L	1.300	1.700	0.051	0.067
L1	1.400	1.800	0.055	0.071
L2	0.500	0.900	0.020	0.035
P	2.300 BSC		0.091 BSC	

Jun,30,2008

STU/D5025NL2

Ver 1.0


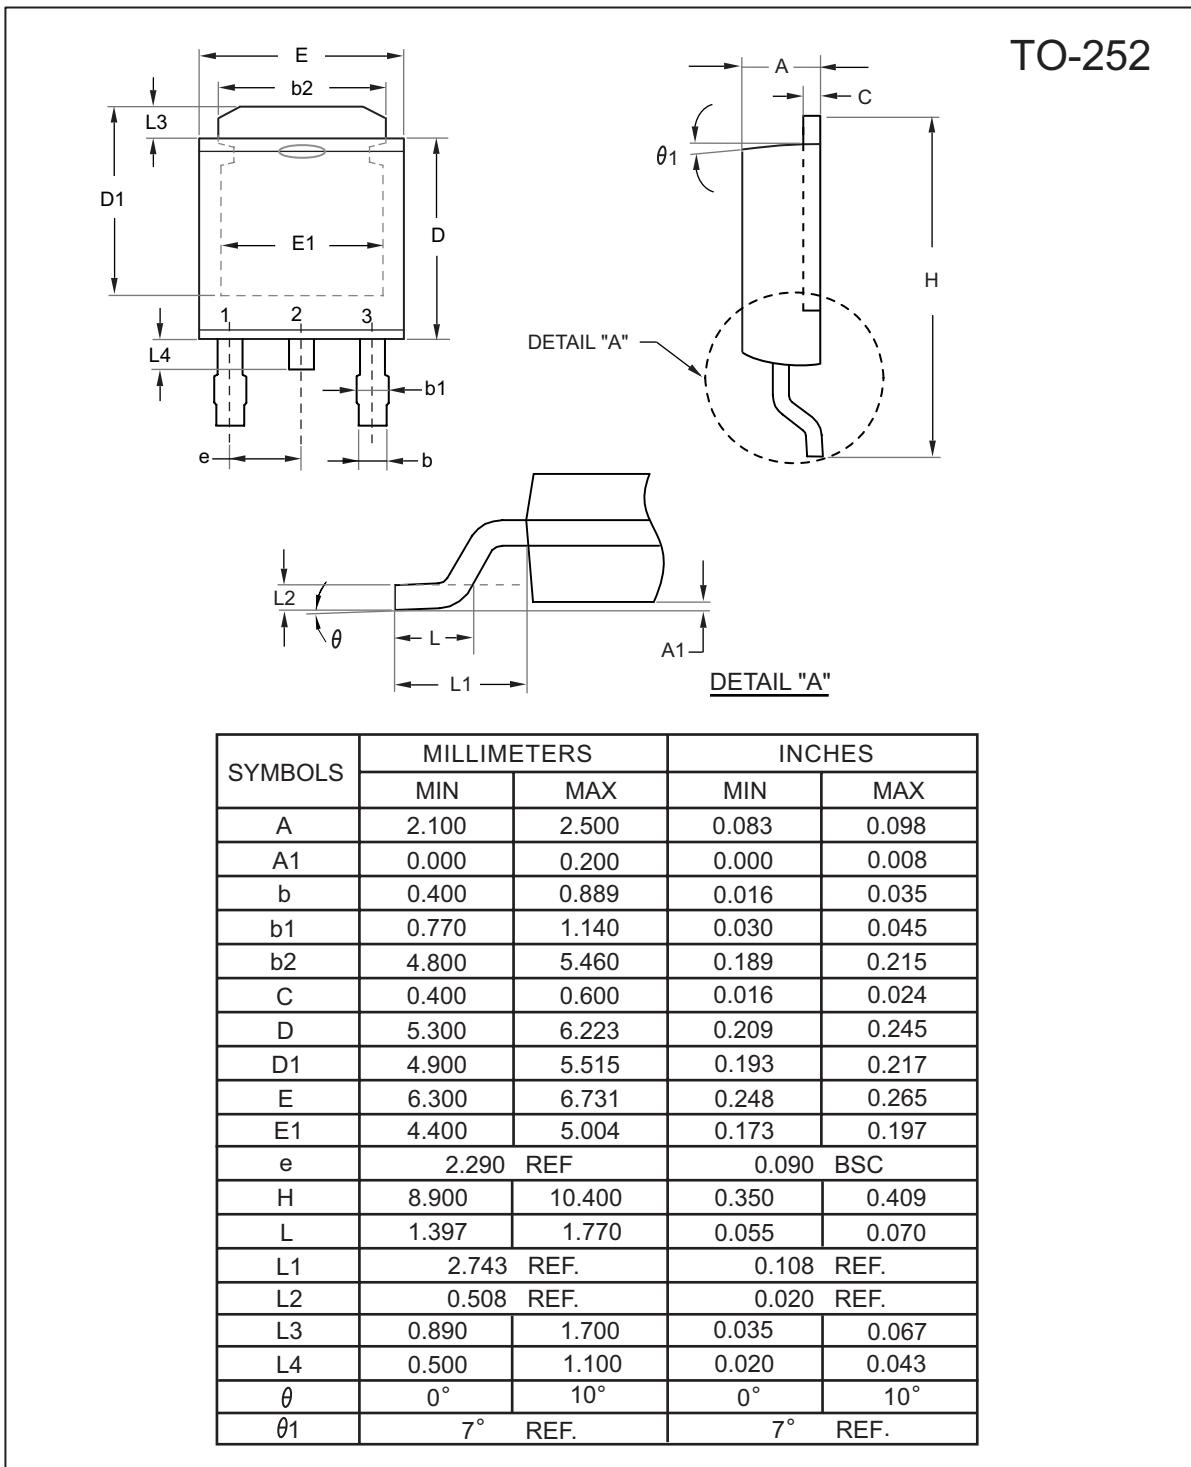


STU/D5025NL2


Ver 1.0

TO251 Tube/TO-252 Tape and Reel Data

TO-251 Tube

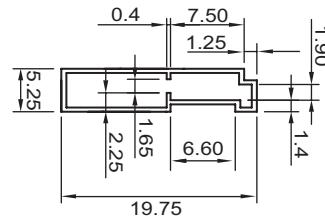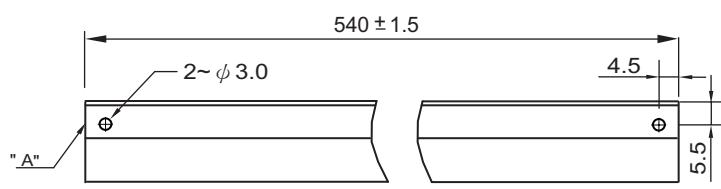




TO-252 Carrier Tape

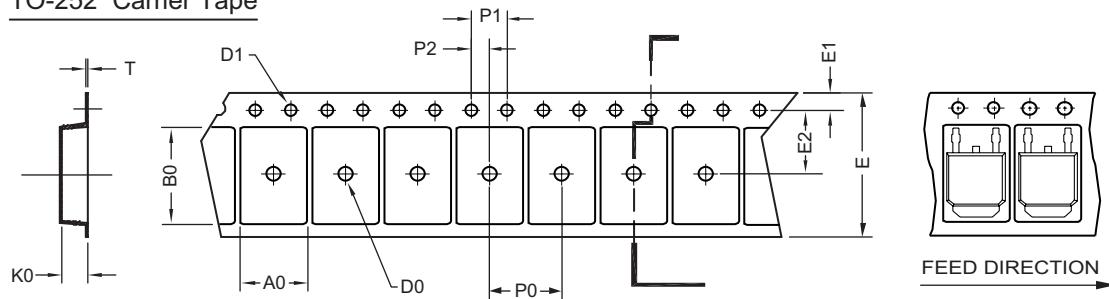

UNIT:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
TO-252 (16 mm)	6.96 ±0.1	10.49 ±0.1	2.79 ±0.1	ψ 2	ψ 1.5 + 0.1 - 0	16.0 ±0.3	1.75 ±0.1	7.5 ±0.15	8.0 ±0.1	4.0 ±0.1	2.0 ±0.15	0.3 ±0.05

TO-252 Reel

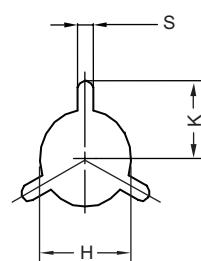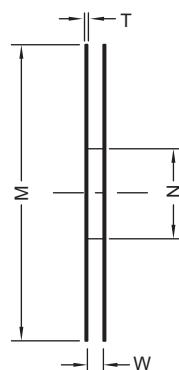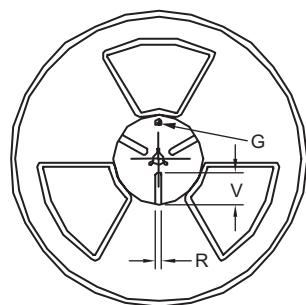

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	T	H	K	S	G	R	V
16 mm	ψ 330	ψ 330 ± 0.5	ψ 97 ± 1.0	17.0 + 1.5 - 0	2.2	ψ 13.0 + 0.5 - 0.2	10.6	2.0 ± 0.5	---	---	---

Jun,30,2008