

### ■ Features


- Low current rectification and high speed switching.
- Extremely small surface mount type.
- Up to 100mA current capability.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "G" indicates Halogen-free part, ex. RB520DG.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

### ■ Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-923
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : Approximated 0.00044 gram

### ■ Outline

SOD-923

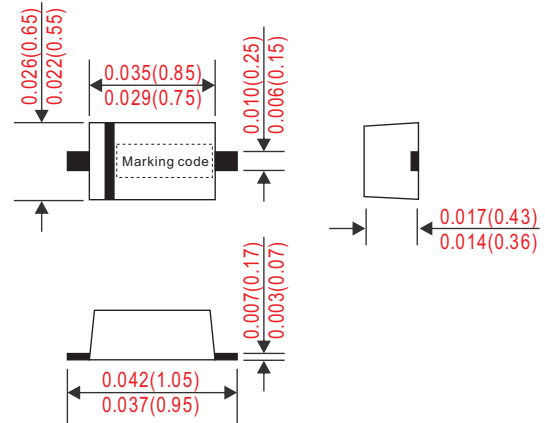

### ■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	RB520D	UNIT
Marking code		E	
Maximum Recurrent Peak Reverse Voltage	$V_{RM}$	30	V
Continuous reverse voltage	$V_R$	30	V
Maximum Instantaneous Forward Voltage@10mA DC	$V_F$	0.45	V
Power Dissipation	$P_D$	150	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	520	°C/W
Operating Temperature	$T_J$	-40 ~ +125	°C
Storage temperature	$T_{STG}$	-40 ~ +125	°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Mean rectifying current		$I_o$			100	mA
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$			500	mA
Reverse current	$V_R = 10V$ DC	$I_R$			0.5	uA

■ Rating and characteristic curves

FIG.1-TYPICAL FORWARD CHARACTERISTICS

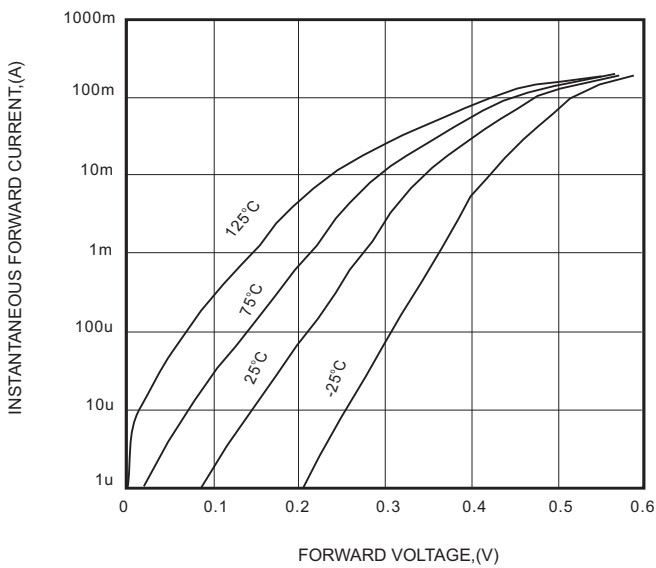


FIG.2 - TYPICAL REVERSE CHARACTERISTICS



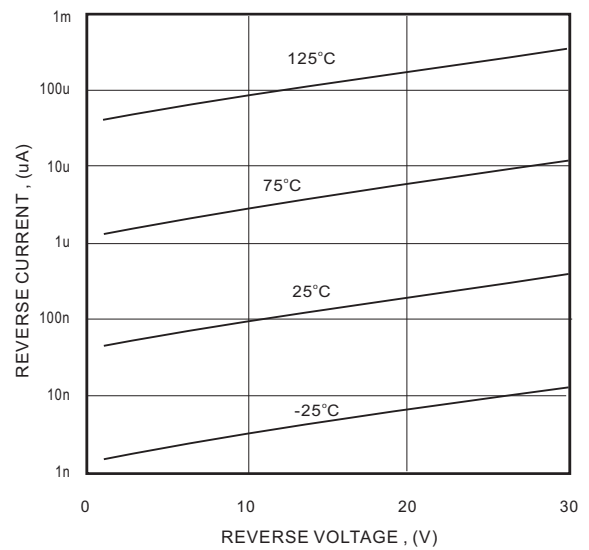


FIG.3-TYPICAL TERMINALS CAPACITANCE

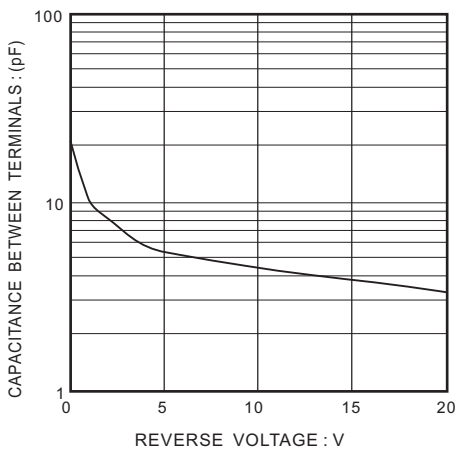

■ SOD-923 foot print

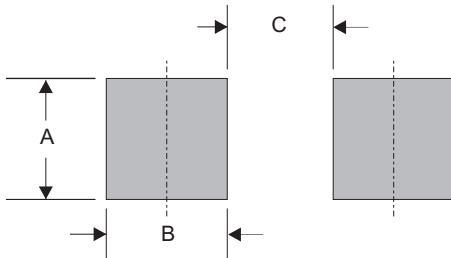

A	B	C
0.016 (0.40)	0.012 (0.30)	0.024 (0.60)

Dimensions in inches and (millimeters)

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.