

### ■ Features

- Low power loss, high efficiency.
- High surge current capability.
- Super fast recovery time for switching mode application.
- Low power loss.
- Glass passivated chip junctions.
- Suffix "G" indicates Halogen-free part, ex.ETF10005G.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

### ■ Mechanical data


- Epoxy : UL94-V0 rated flame retardant.
- Case : JEDEC ITO-220AC molded plastic body over passivated chip.
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Polarity: Color band denotes cathode end.
- Mounting Position : Any.
- Weight : Approximated 2.24 gram.

### ■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

### ■ Outline

ITO-220AC

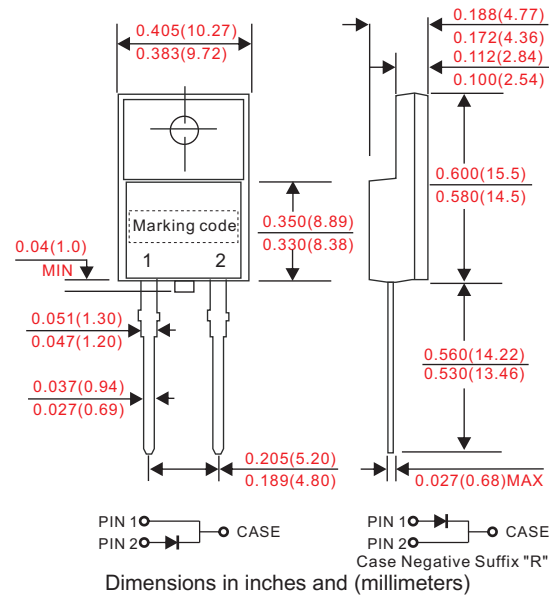

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current		$I_o$			10	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$			150	A
Reverse current	$V_R = V_{RRM}$ $T_A = 25^\circ\text{C}$	$I_R$			1.0	uA
	$V_R = V_{RRM}$ $T_A = 125^\circ\text{C}$				300	
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	$C_j$		62		pF
Storage temperature		$T_{STG}$	-50		+150	°C

Symbol	Marking code	Max. repetitive peak reverse voltage $V_{RRM}$ (V)	Max. RMS voltage $V_{RMS}$ (V)	Max. DC blocking voltage $V_R$ (V)	Max. forward voltage @10A, $T_A = 25^\circ\text{C}$ $V_F$ (V)	Max. reverse recovery time(1) $T_{rr}$ (ns)	Operating temperature $T_J$ (°C)
ETF10005	ETF10005	50	35	50	0.95	35	-50 ~ +150
ETF1001	ETF1001	100	70	100			
ETF1002	ETF1002	200	140	200			
ETF1004	ETF1004	400	280	400	1.30	75	
ETF1006	ETF1006	600	420	600			
ETF1008	ETF1008	800	560	800			
ETF1010	ETF1010	1000	700	1000	1.70		

Note : 1.  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{RR} = 0.25A$

### Rating and characteristic curves

Fig.1 - Forward Current Derating Curve

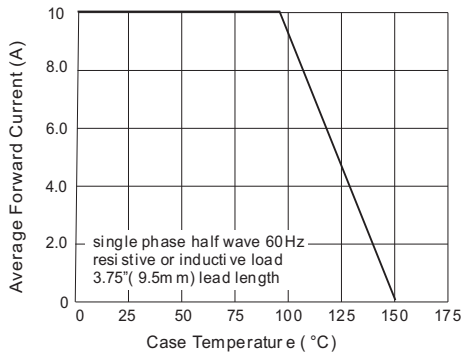


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

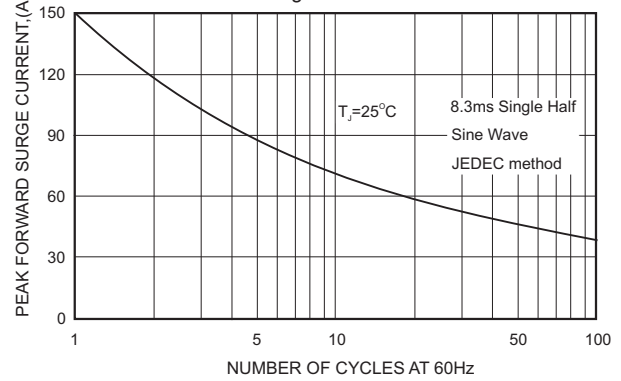


Fig. 3 - Typical Instantaneous Forward Characteristics

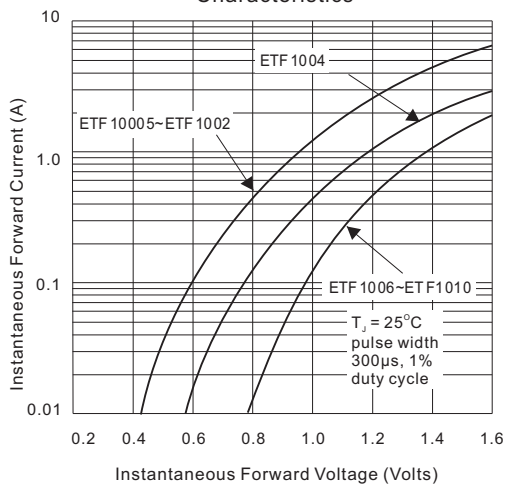


Fig. 4 - Typical Reverse Characteristics


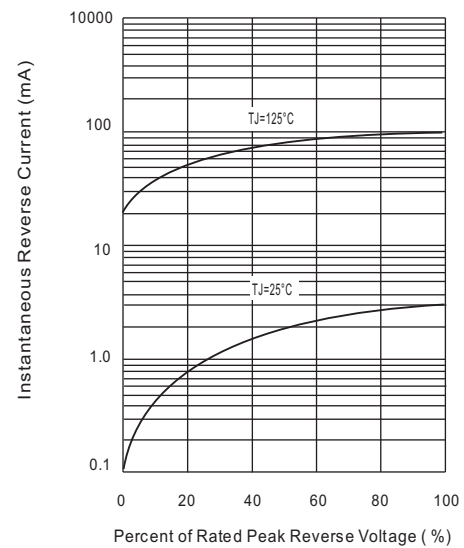


Fig. 5 - Typical Junction Capacitance

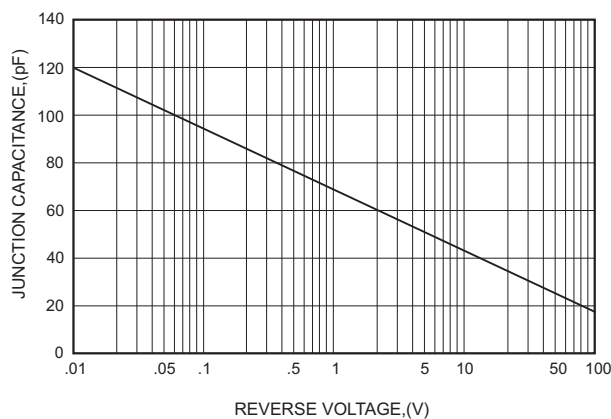

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.