

# BYV26EAGP

**SINTERED GLASS JUNCTION  
FAST SWITCHING PLASTIC RECTIFIER**  
VOLTAGE: 1000V                      CURRENT: 1.5A




## FEATURE

High temperature metallurgically bonded construction  
Sintered glass cavity free junction  
Capability of meeting environmental standard of MIL-S-19500  
High temperature soldering guaranteed  
350°C /10sec/0.375"lead length at 5 lbs tension  
Operate at Ta =55°C with no thermal run away  
Typical Ir<0.1µA

## MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: color band denotes cathode  
Mounting position: any

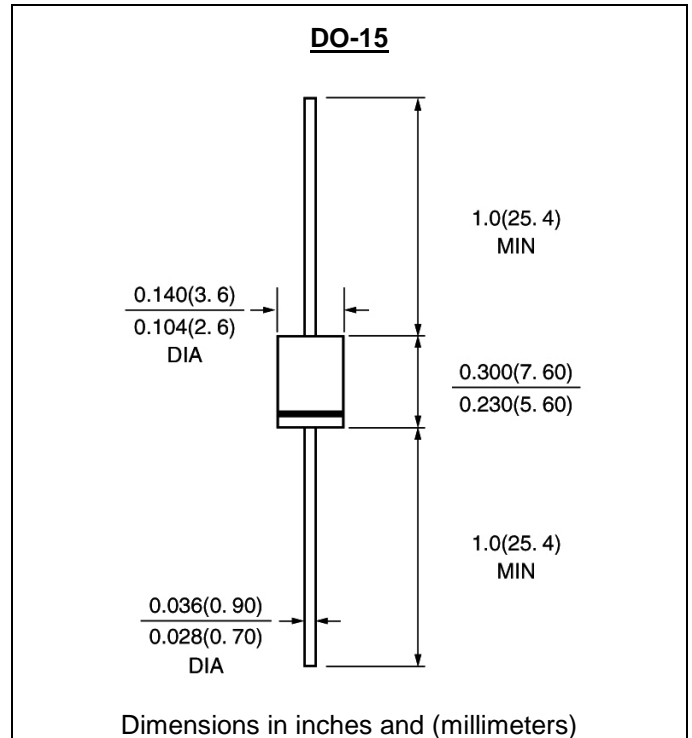

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	BYV26EAGP	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	1000	V
Maximum RMS Voltage	Vrms	700	V
Maximum DC blocking Voltage	Vdc	1000	V
Reverse avalanche breakdown voltage at IR = 0.1 mA	V(BR)R	1100min	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =55°C	If(av)	1.5	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	30	A
Maximum Forward Voltage at 1.0A	Vf	2.5	V
Non-repetitive peak reverse avalanche energy (Note 1)	Ersm	10	mJ
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =150°C	Ir	5.0 150.0	µA
Maximum Reverse Recovery Time (Note 2)	Trr	75	nS
Typical Junction Capacitance (Note 3)	Cj	15.0	pF
Typical Thermal Resistance (Note 4)	Rth(ja)	55.0	°C /W
Storage and Operating Junction Temperature	Tstg, Tj	-65 to +175	°C


Note: 1. IR=400mA; Tj=Tjmax prior to surge; inductive load switched off  
2. Reverse Recovery Condition If =0.5A, Ir =1.0A, Irr =0.25A  
3. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc  
4. Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

## RATINGS AND CHARACTERISTIC CURVES BYV26EAGP


**FIG. 1 - FORWARD CURRENT DERATING CURVE**

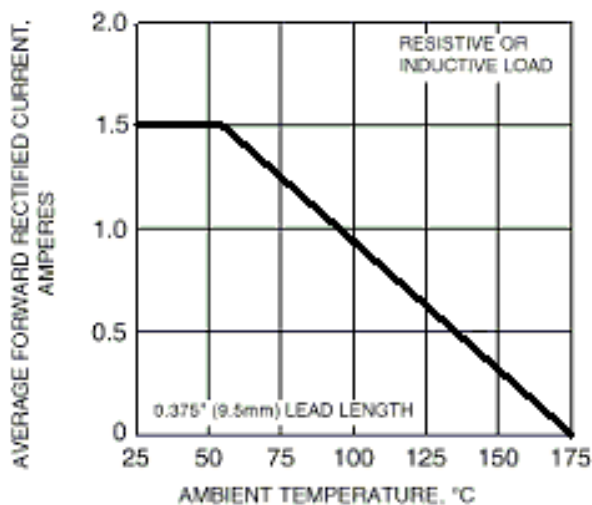


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

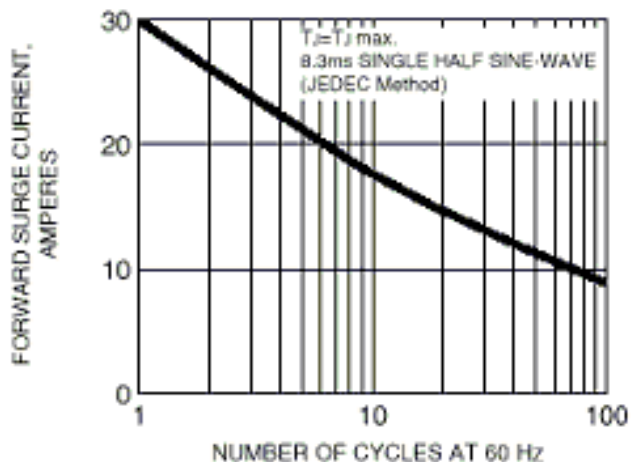


**FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

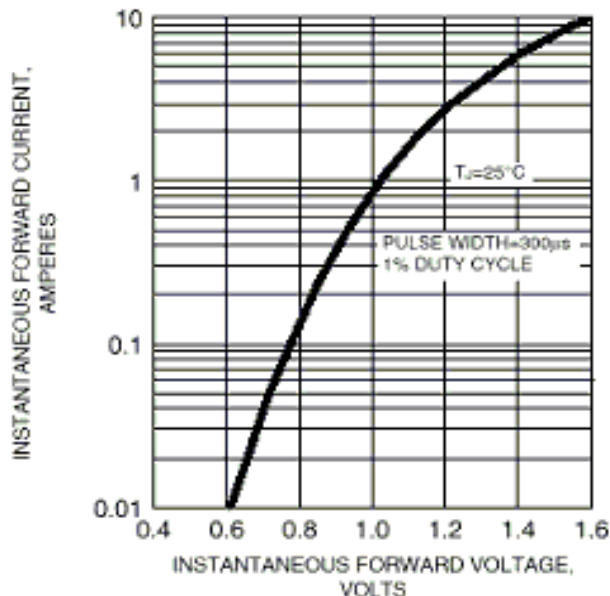

**FIG. 4 - TYPICAL REVERSE CHARACTERISTICS**

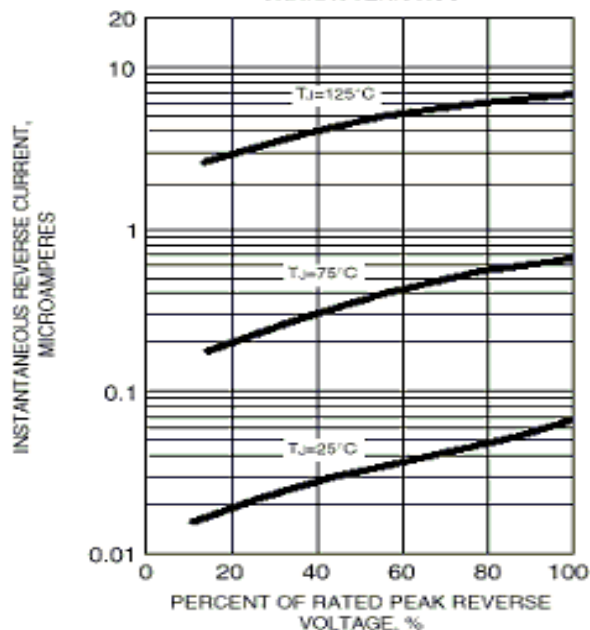

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

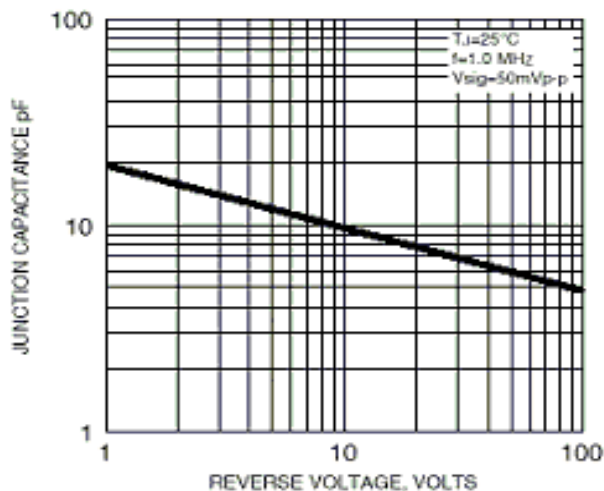

**FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE**

