

### FEATURES

- BROAD BAND INTERNALLY MATCHED HEMT
- HIGH POWER  
Pout= 47.0dBm at Pin= 42.0dBm
- HIGH GAIN  
GL= 8.0dB at 13.75GHz to 14.5GHz
- LOW INTERMODULATION DISTORTION  
IM3(Min.)= -25dBc at Po=40.0dBm  
Single Carrier Level
- HERMETICALLY SEALED PACKAGE



### RF PERFORMANCE SPECIFICATIONS ( Ta= 25°C )

CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT	MIN.	TYP.	MAX.
Output Power	Pout	VDS= 24V IDSset= 2.0A f= 13.75 to 14.5 GHz @Pin= 42dBm	dBm	46.0	47.0	—
Gain flatness	ΔG		dB	—	—	±0.8
Drain Current	IDS1		A	—	5.0	6.0
Power Added Efficiency	ηadd		%	—	31	—
Gate Current	IgRF		mA	-40	—	+100
Linear Gain	GL	@Pin= 20dBm	dB	7.0	8.0	—
3rd Order Intermodulation Distortion	IM3	Two-Tone Test Po= 40.0dBm, Δf= 5MHz (Single Carrier Level)	dBc	-25	—	—
Drain Current	IDS2	(VDS X IDS + Pin – P1dB) X Rth(c-c)	A	—	5.0	6.0
Channel Temperature Rise	ΔTch		°C	—	130	160

**Recommended Gate Resistance(Rg): 13.3 Ω (Typ.)**

### ELECTRICAL CHARACTERISTICS ( Ta= 25°C )


CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT	MIN.	TYP.	MAX.
Transconductance	gm	VDS= 5V IDS= 5.0A	S	—	4.5	—
Pinch-off Voltage	VGSoff	VDS= 5V IDS= 23mA	V	-1.0	-4.0	-6.0
Saturated Drain Current	IDSS	VDS= 5V VGS= 0V	A	—	15	18
Gate-Source Breakdown Voltage	VGSO	IGS= -10mA	V	-10	—	—
Thermal Resistance	Rth(c-c)	Channel to Case	°C/W	—	1.4	1.6

- ◆ The information contained herein is presented as guidance for product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of product. No license to any intellectual property right is granted by this document. The information contained herein is subject to change without prior notice. It is advisable to contact TOSHIBA before proceeding with design of equipment incorporating this product.

**ABSOLUTE MAXIMUM RATINGS ( Ta= 25°C )**

CHARACTERISTICS	SYMBOL	UNIT	RATING
Drain-Source Voltage	VDS	V	50
Gate-Source Voltage	VGS	V	-10
Drain Current	IDS	A	15.0
Total Power Dissipation (Tc= 25 °C)	PT	W	140
Channel Temperature	Tch	°C	250
Storage Temperature	Tstg	°C	-65 to +175

**PACKAGE OUTLINE (7-AA07A)**

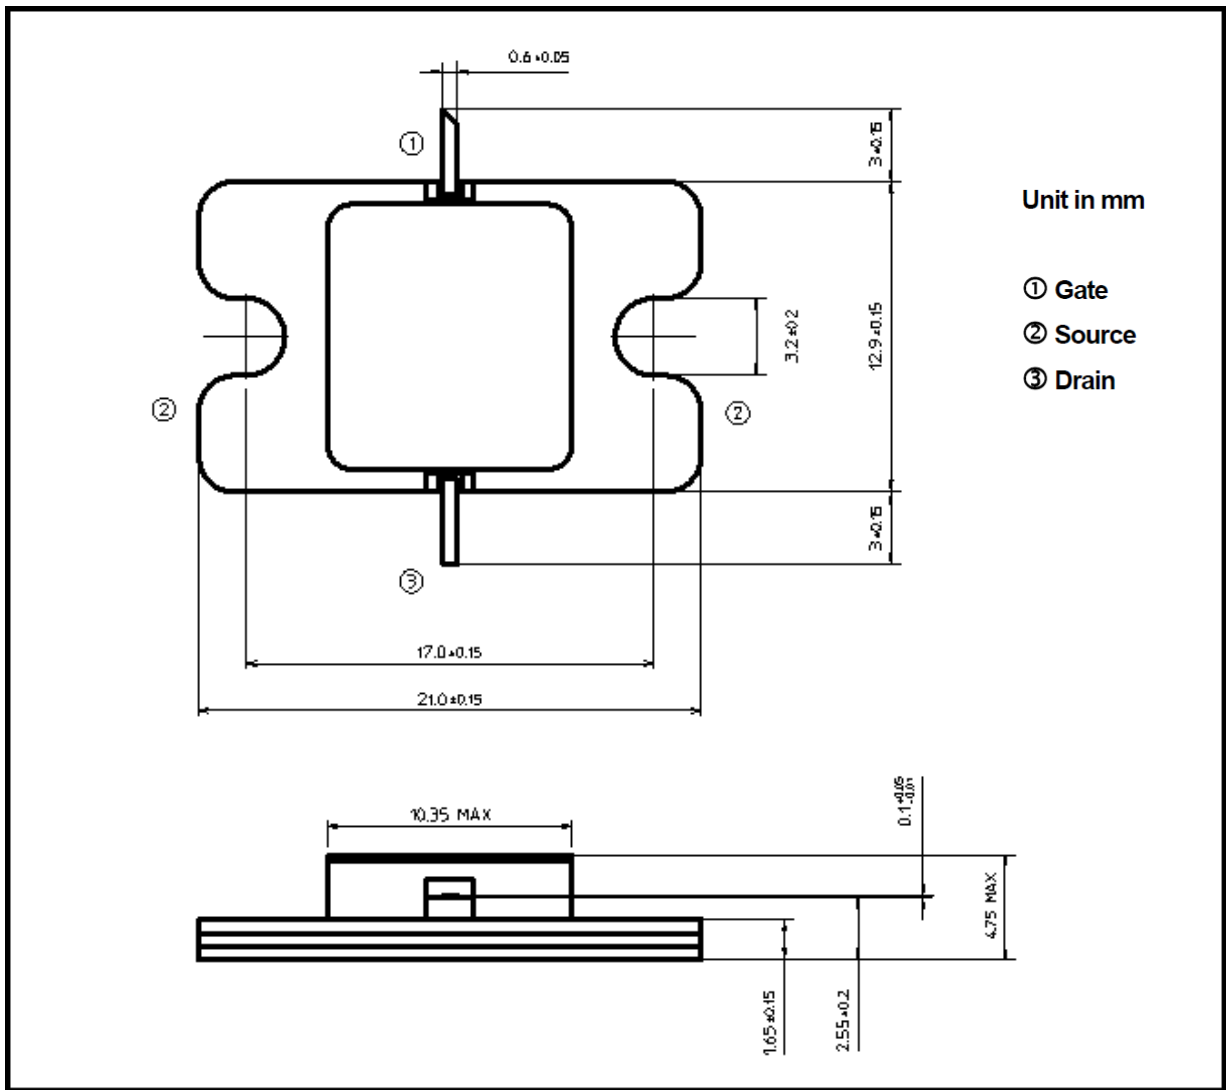

**HANDLING PRECAUTIONS FOR PACKAGE MODEL**

Soldering iron should be grounded and the operating time should not exceed 10 seconds at 260°C.