

# BR2500 - BR2510

PRV : 50 - 1000 Volts

Io : 25 Amperes


### FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Rated isolation-voltage 2000 V<sub>AC</sub>
- \* Pb / RoHS Free

### MECHANICAL DATA :

- \* Case : Molded plastic with heatsink integrally mounted in the bridge encapsulation
- \* Epoxy : UL94V-0 rate flame retardant
- \* Terminals : plated .25" (6.35 mm). Faston
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency.
- \* Weight : 17.1 grams

# SILICON BRIDGE RECTIFIERS

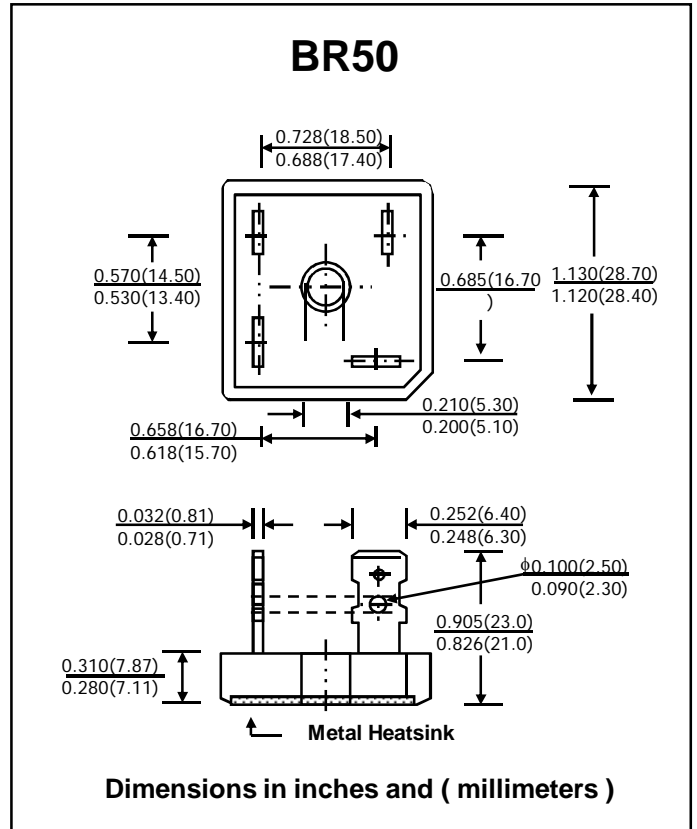

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


| RATING   | SYMBOL                      | BR2500            | BR2501 | BR2502 | BR2504 | BR2506 | BR2508 | BR2510 | UNIT             |
|--|-----------------------------|-------------------|--------|--------|--------|--------|--------|--------|------------------|
| Maximum Recurrent Peak Reverse Voltage   | V <sub>RRM</sub>            | 50                | 100    | 200    | 400    | 600    | 800    | 1000   | V                |
| Maximum RMS Voltage  | V <sub>RMS</sub>            | 35                | 70     | 140    | 280    | 420    | 560    | 700    | V                |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>             | 50                | 100    | 200    | 400    | 600    | 800    | 1000   | V                |
| Maximum Average Forward Current T <sub>c</sub> = 55°C                                      | I <sub>F(AV)</sub>          | 25                |        |        |        |        |        |        | A                |
| Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>            | 300               |        |        |        |        |        |        | A                |
| Current Squared Time at t < 8.3 ms.  | I <sup>2</sup> <sub>t</sub> | 375               |        |        |        |        |        |        | A <sup>2</sup> S |
| Maximum Forward Voltage per Diode at I <sub>F</sub> = 12.5 A                               | V <sub>F</sub>              | 1.1               |        |        |        |        |        |        | V                |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage                                 | T <sub>a</sub> = 25 °C      | I <sub>R</sub>    |        |        |        |        |        |        | μA               |
|  | T <sub>a</sub> = 100 °C     | I <sub>R(H)</sub> |        |        |        |        |        |        | μA               |
| Typical Thermal Resistance (Note 1)  | R <sub>θJC</sub>            | 1.45              |        |        |        |        |        |        | °C/W             |
| Operating Junction Temperature Range   | T <sub>J</sub>              | - 40 to + 150     |        |        |        |        |        |        | °C               |
| Storage Temperature Range  | T <sub>STG</sub>            | - 40 to + 150     |        |        |        |        |        |        | °C               |

**Notes :**


1. Thermal Resistance from junction to case with units mounted on a 5" x 6" x 4.9" (12.8cm.x 15.2cm.x 12.4cm.) Al.-Finned Plate

**RATING AND CHARACTERISTIC CURVES ( BR2500 - BR2510 )**


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

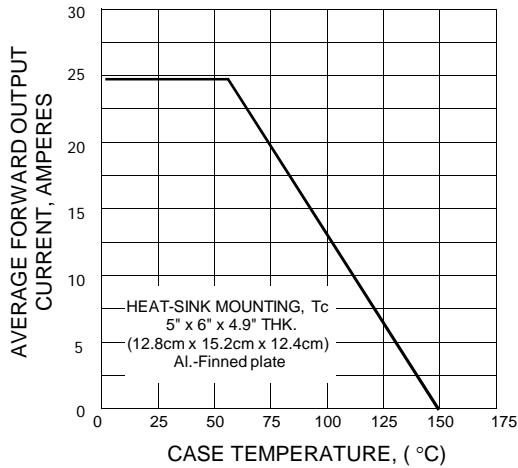

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

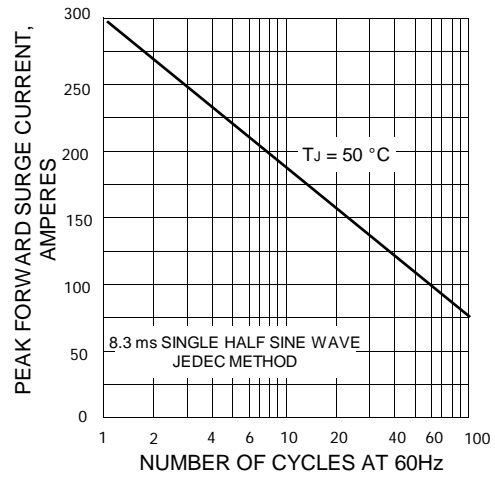

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

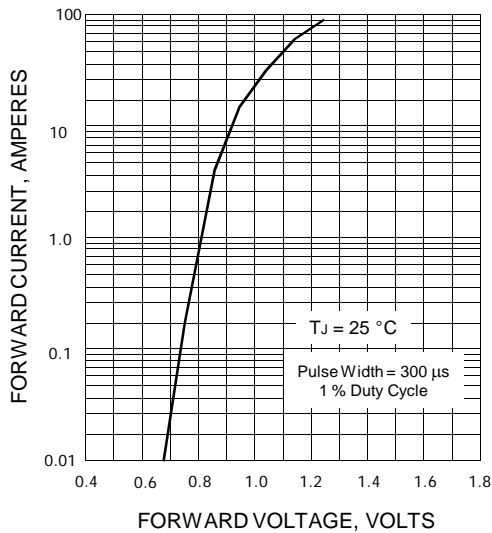

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER DIODE**

