

ERC05-06 ~ ERC05-10

PRV : 600-1000 Volts

Io : 1.2 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : D2 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.465 gram

SILICON RECTIFIER DIODES

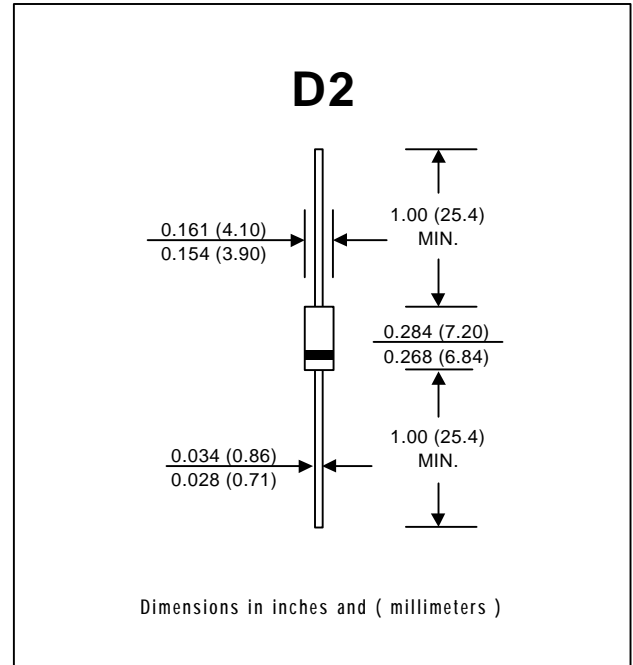

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 50 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	ERC05-06	ERC05-08	ERC05-10	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	600	800	1000	V
Maximum RMS voltage	V _{RMS}	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	600	800	1000	V
Maximum Average Forward Current	I _{F(AV)}	1.2			A
Maximum Peak Forward Surge Current Single half sine wave superimposed on rated load (JEDEC Method)	I _{FSM}	100			A
Maximum Forward Voltage drop per Diode at I _F = 4.0 A	V _F	1.0			V
Maximum Repetitive Peak Reverse Current	I _{RRM}	10			μA
Junction Temperature Range	T _J	- 40 to + 140			°C
Storage Temperature Range	T _{STG}	- 40 to + 140			°C

RATING AND CHARACTERISTIC CURVES (ERC05-06 to ERC05-10)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

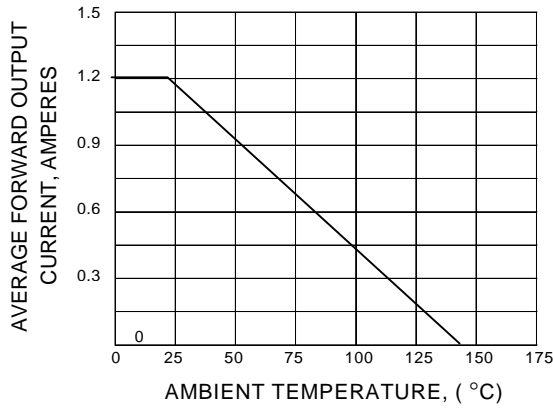


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

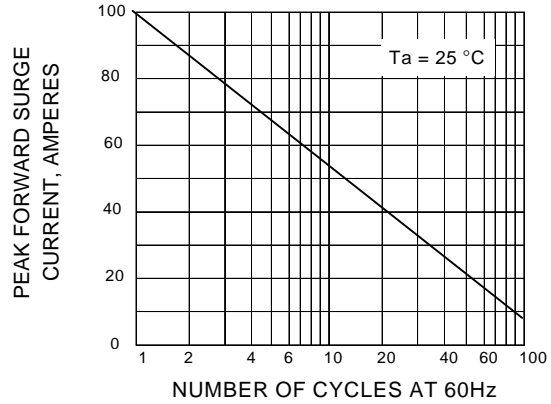


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

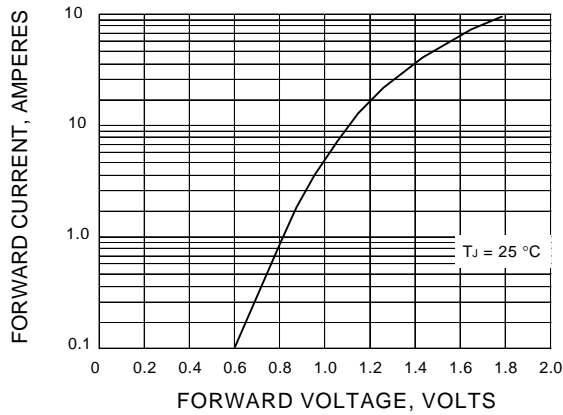


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

