

# MDD5N50F

## N-Channel MOSFET 500V, 4.2 A, 1.55Ω

MDD5N50F N-channel MOSFET 500V

### General Description

The MDD5N50F uses advanced Magnachip's MOSFET Technology, which provides low on-state resistance, high switching performance and excellent quality.



MDD5N50F is suitable device for Power Supply, PFC and general purpose applications.

### Features

- $V_{DS} = 500V$
- $I_D = 4.2A$  @ $V_{GS} = 10V$
- $R_{DS(ON)} \leq 1.5\Omega$  @ $V_{GS} = 10V$

### Applications

- Power Supply
- PFC
- Ballast

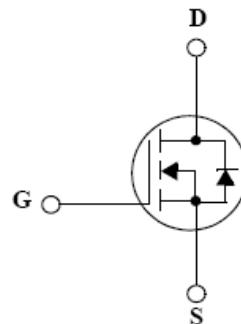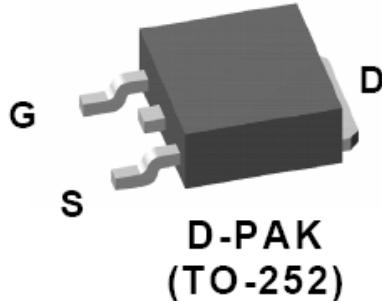

### Absolute Maximum Ratings ( $T_a = 25^\circ C$ )

Characteristics	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	500	V
Gate-Source Voltage	$V_{GSS}$	$\pm 30$	V
Continuous Drain Current	$I_D$	4.2	A
		2.6	A
Pulsed Drain Current <sup>(1)</sup>	$I_{DM}$	16.8	A
Power Dissipation	$P_D$	70	W
		0.56	W/°C
Peak Diode Recovery $dv/dt$ <sup>(3)</sup>	$Dv/dt$	4.5	V/ns
Single Pulse Avalanche Energy <sup>(4)</sup>	$E_{AS}$	230	mJ
Junction and Storage Temperature Range	$T_J, T_{stg}$	-55~150	°C

### Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient <sup>(1)</sup>	$R_{θJA}$	110	°C/W
Thermal Resistance, Junction-to-Case <sup>(1)</sup>	$R_{θJC}$	1.8	

## Ordering Information


Part Number	Temp. Range	Package	Packing	RoHS Status
MDD5N50FRH	-55~150°C	D-PAK	RELL & TAPE	Halogen Free

## Electrical Characteristics (Ta =25°C)


Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	I <sub>D</sub> = 250μA, V <sub>GS</sub> = 0V	500	-	-	V
Gate Threshold Voltage	V <sub>Gsth</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	2.5	-	4.5	
Drain Cut-Off Current	I <sub>DSS</sub>	V <sub>DS</sub> = 500V, V <sub>GS</sub> = 0V	-	-	10	μA
Gate Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> = ±30V, V <sub>DS</sub> = 0V	-	-	100	nA
Drain-Source ON Resistance	R <sub>DSON</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 2.1A		1.25	1.55	Ω
Forward Transconductance	g <sub>fs</sub>	V <sub>DS</sub> = 30V, I <sub>D</sub> = 2.1A	-	5	-	S
<b>Dynamic Characteristics</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = 400V, I <sub>D</sub> = 4.2A, V <sub>GS</sub> = 10V <sup>(3)</sup>	-	12.2	-	nC
Gate-Source Charge	Q <sub>gs</sub>		-	3.6	-	
Gate-Drain Charge	Q <sub>gd</sub>		-	4.7	-	
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, f = 1.0MHz	-	530	-	pF
Reverse Transfer Capacitance	C <sub>rss</sub>		-	3	-	
Output Capacitance	C <sub>oss</sub>		-	65	-	
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>GS</sub> = 10V, V <sub>DS</sub> = 250V, I <sub>D</sub> = 4.2A, R <sub>G</sub> = 25Ω <sup>(3)</sup>	-	12	-	Ns
Rise Time	t <sub>r</sub>		-	24	-	
Turn-Off Delay Time	t <sub>d(off)</sub>		-	24	-	
Fall Time	t <sub>f</sub>		-	22	-	
<b>Drain-Source Body Diode Characteristics</b>						
Maximum Continuous Drain to Source Diode Forward Current	I <sub>S</sub>		-	4.2	-	A
Source-Drain Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> = 4.2A, V <sub>GS</sub> = 0V	-	-	1.4	V
Body Diode Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> = 4.2A, dI/dt = 100A/μs <sup>(3)</sup>	-	105	-	ns
Body Diode Reverse Recovery Charge	Q <sub>rr</sub>		-	0.2	-	μC

Note :


1. Pulse width is based on R<sub>θJC</sub> & R<sub>θJA</sub> and the maximum allowed junction temperature of 150°C.
2. Pulse test: pulse width ≤300us, duty cycle≤2%, pulse width limited by junction temperature T<sub>J(MAX)</sub>=150°C.
3. I<sub>SD</sub>≤4.2A, di/dt≤200A/us, V<sub>DD</sub>=50V, R<sub>g</sub>=25Ω, Starting T<sub>j</sub>=25°C
4. L=16.5mH, I<sub>AS</sub>=4.2A, V<sub>DD</sub>=50V, R<sub>g</sub>=25Ω, Starting T<sub>j</sub>=25°C

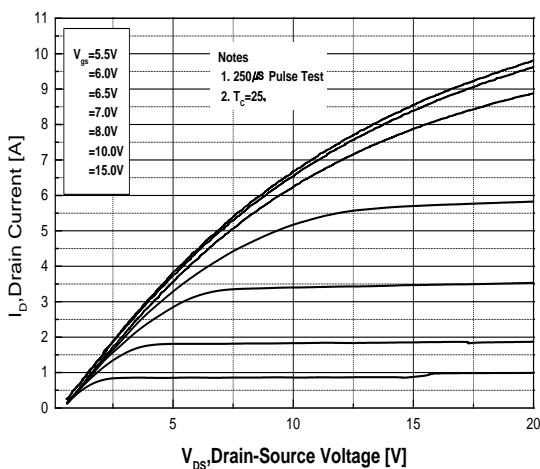


**Fig.1 On-Region Characteristics**

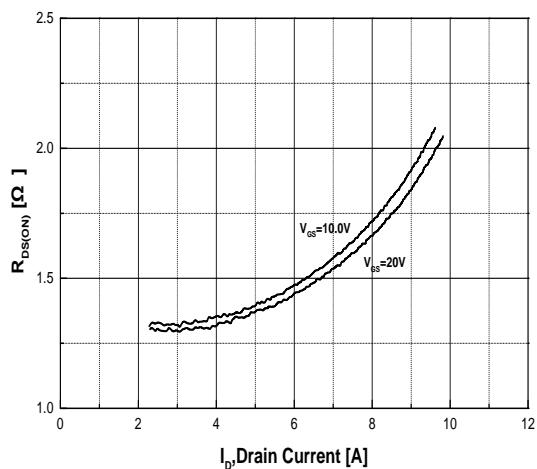


**Fig.2 On-Resistance Variation with Drain Current and Gate Voltage**

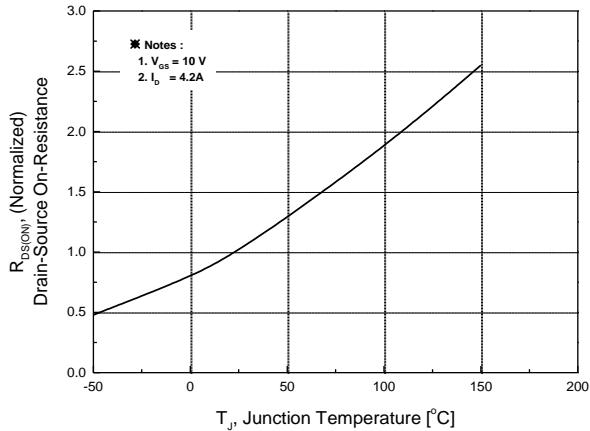


**Fig.3 On-Resistance Variation with Temperature**

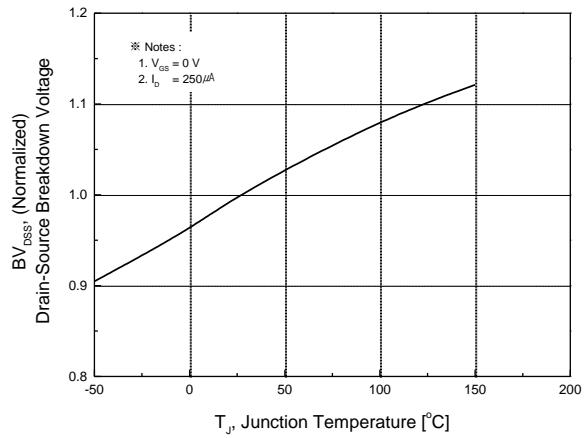

**Fig.4 Breakdown Voltage Variation vs. Temperature**

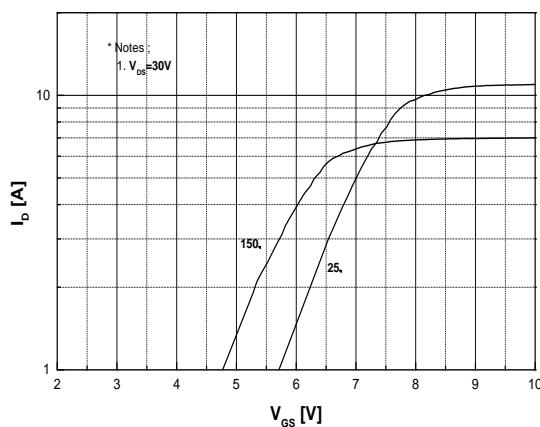

**Fig.5 Transfer Characteristics**

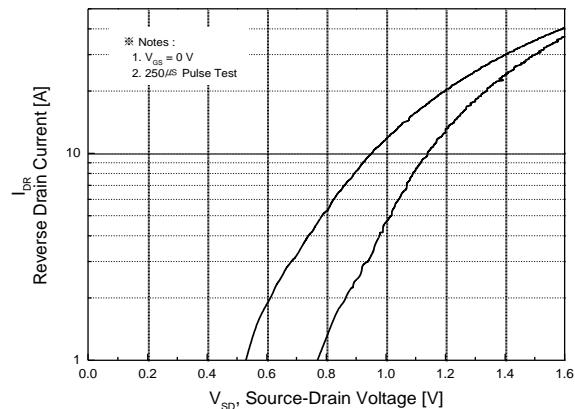

**Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature**

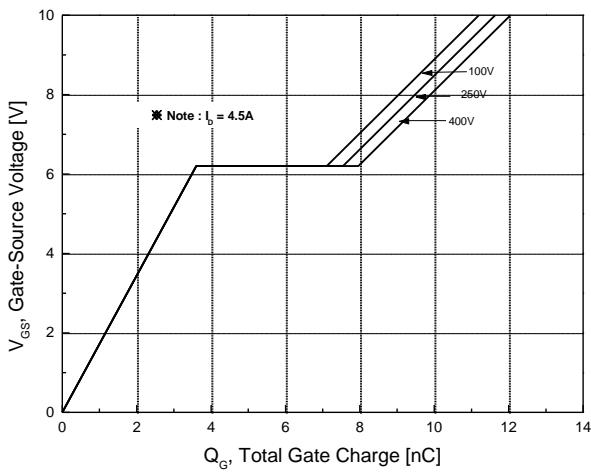


Fig.7 Gate Charge Characteristics

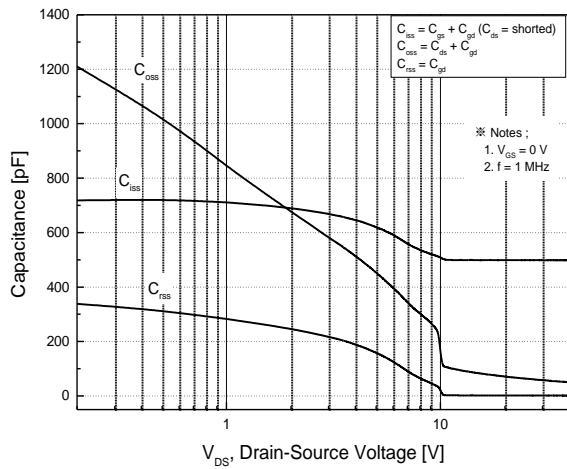


Fig.8 Capacitance Characteristics

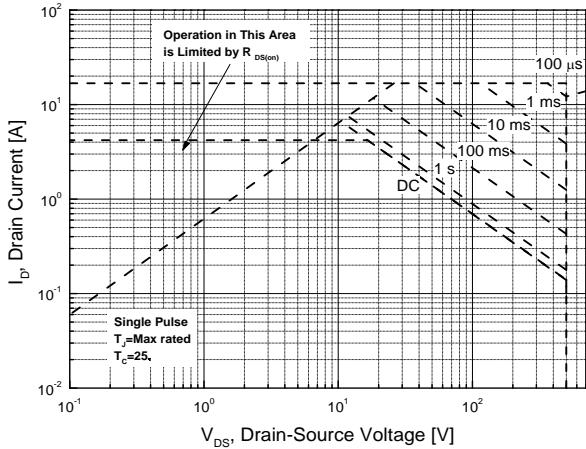


Fig.9 Maximum Safe Operating Area

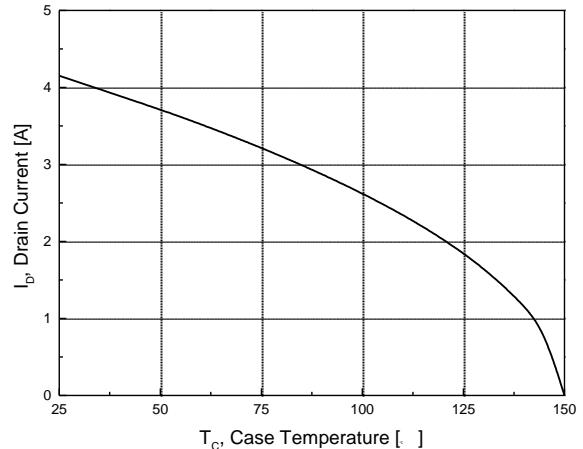


Fig.10 Maximum Drain Current vs. Case Temperature

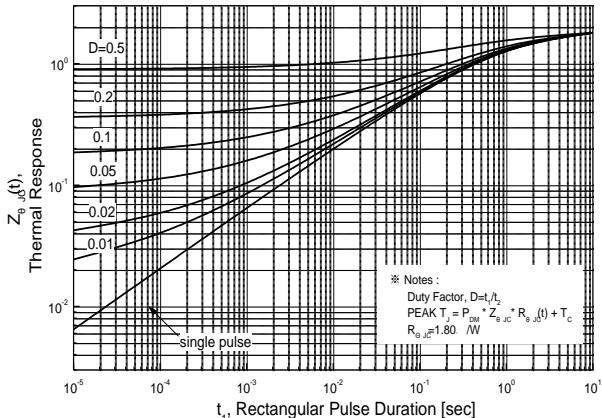


Fig.11 Transient Thermal Response Curve




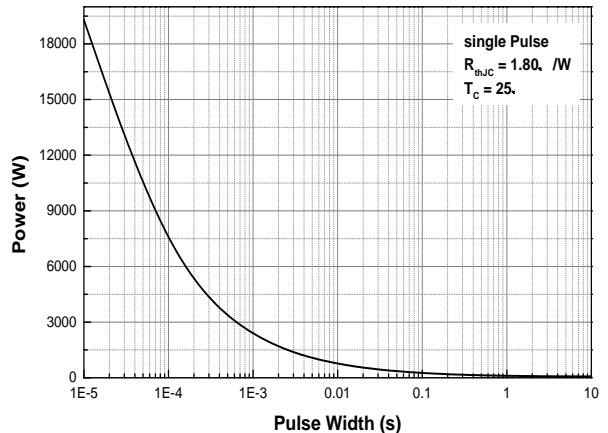


Fig.12 Single Pulse Maximum Power Dissipation

## Package Dimension

### D-PAK (TO-252)

Dimensions are in millimeters, unless otherwise specified

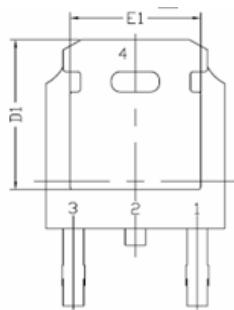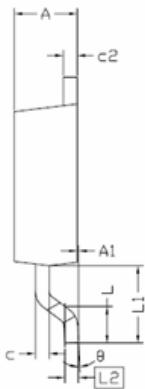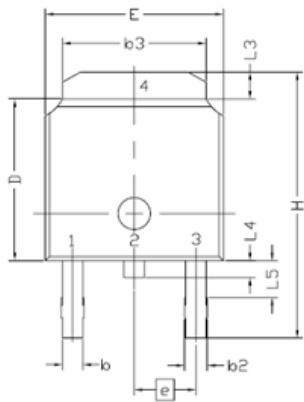

Symbol	Min.	Nom.	Max.
E	6,35	-	6,73
L	1,40	1,52	1,78
L1		2,74 REF	
L2		0,508 BCS	
L3	0,89	-	1,27
L4	-	-	1,02
L5	1,14	-	1,52
D	5,97	6,10	6,22
H	9,40	-	10,41
b	0,64	-	0,89
b2	0,76	-	1,14
b3	4,95	-	5,46
e		2,286 BSC	
A	2,18	-	2,39
A1	-	-	0,13
c	0,46	-	0,61
c2	0,46	-	0,89
D1	5,21	-	-
E1	4,32	-	-
θ	0,00	-	10,00

**DISCLAIMER:**

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product. [MagnaChip®](#) is a registered trademark of MagnaChip Semiconductor Ltd.