

Preliminary_MSB15N60

N-Channel Enhancement Mode Power MOSFET

Description

The MSB15N60 is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-263 package is universally preferred for all commercial-industrial applications

Features


- Low On Resistance
- Simple Drive Requirement
- Low Gate Charge
- Fast Switching Characteristic
- RoHS compliant package

Application


- Adapter
- Switching Mode Power Supply

Packing & Order Information

3M000/Reel

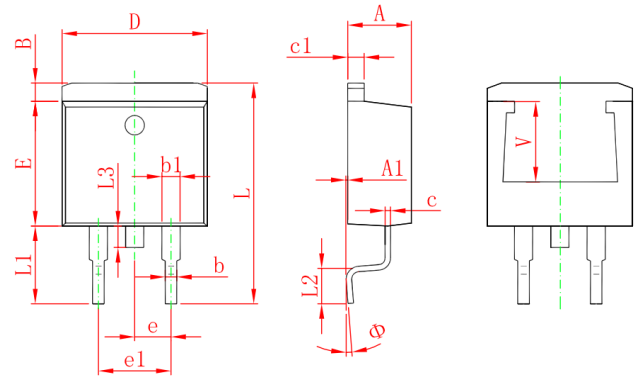


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.120	1.420	0.044	0.056
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	14.940	15.500	0.588	0.610
L1	4.950	5.450	0.195	0.215
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
Φ	0°	8°	0°	8°
V	5.600 REF.		0.220 REF.	



**RoHS
COMPLIANT**

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain-Source Voltage	600	V
V_{GS}	Gate-Source Voltage	±30	V
I_D	Drain Current -Continuous (TC=25°C)	15	A
	Drain Current -Continuous (TC=100°C)	9.5	A
I_{DM}	Drain Current -Pulsed	60	A
I_{AR}	Avalanche Current	15	A
E_{AS}	Single Pulsed Avalanche Energy	245	mJ
E_{AR}	Repetitive Avalanche Energy	24	mJ
dV/dt	Peak Diode Recovery dV/dt	9.8	V/ns
T_J	Storage Temperature	150	°C

Preliminary_MSB15N60

N-Channel Enhancement Mode Power MOSFET

Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C
P_D	Total Power Dissipation (@TC = 25 °C) 245 W	245	W
	Derating Factor above 25 °C	2	W/°C
T_{STG}	Operating Junction and Storage Temperature	-55 to +150	°C

Note:

- 1.Repetitive rating; pulse width limited by maximum junction temperature.
2. $I_{AS}=15A$, $V_{DD}=50V$, $L=0.5mH$, $R_G=25\Omega$, starting $T_J=+25^\circ C$.
3. $I_{SD}\leq 7.5A$, $dI/dt\leq 100A/\mu s$, $V_{DD}\leq BVDSS$, starting $T_J=+25^\circ C$.

Thermal Resistance Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance,Junction-to-Case	--	0.93	°C/W
$R_{\theta JA}$	Thermal Resistance,Junction-to-Ambient	--	62.5	

Static Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D=250\mu A$	2.0		4.0	V
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 V$, $I_D=250\mu A$	600	--	--	V
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250\mu A$, Referenced to 25°C	--	0.7	--	V/°C
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 600 V$, $V_{GS} = 0 V$ $V_{DS} = 480 V$, $T_C = 125^\circ C$	--	--	1 10	μA
I_{GSS}	Gate-Body Leakage Current, Forward	$V_{GS} = \pm 30$	--	--	± 100	nA
* $R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10 V$, $I_D = 7.5 A$	--	0.45	0.52	Ω

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Time	$V_{DD} = 250 V$, $I_D = 15 A$, $V_{GS} = 10 V$, $R_G = 9.1 \Omega$	--	50	101	ns
t_r	Turn-On Time		--	78	162	ns
$t_{d(off)}$	Turn-Off Delay Time		--	120	261	ns
t_f	Turn-Off Fall Time		--	66	128	ns
C_{ISS}	Input Capacitance	$V_{DS} = 25 V$, $V_{GS} = 0 V$, $f = 1.0MHz$	--	2270	3000	pF
C_{OSS}	Output Capacitance		--	300	405	pF
C_{RSS}	Reverse Transfer Capacitance		--	23	37	pF

Preliminary_MSB15N60

N-Channel Enhancement Mode Power MOSFET

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
Q_g	Total Gate Charge	$V_{DD} = 250\text{ V}, I_D = 15\text{ A},$ $V_{GS} = 10\text{ V}$	--	36	60	nC
Q_{gs}	Gate-Source Charge		--	9	--	nC
Q_{gd}	Gate-Drain Charge		--	16	--	nC

Source-Drain Diode						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
I_S		$V_D = V_G = 0,$ $V_S = 1.3\text{ V}$	--	--	14	A
I_{SM}			--	--	60	
V_{SD}		$I_S = 15\text{ A}, V_{GS} = 0\text{ V}$	--	--	1.4	V
t_{rr}		$I_F = 15\text{ A}, V_{GS} = 0\text{ V}$ $diF/dt = 100\text{ A/us}$	--	600	--	ns
Q_{rr}			--	7.2	--	uC

*Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

Preliminary_MSB15N60

N-Channel Enhancement Mode Power MOSFET

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.