


## N-channel MOSFET


### Features

- High ruggedness
- $R_{DS(ON)}$  (Max 7  $\Omega$ ) @  $V_{GS}=10V$
- Gate Charge (Typical 11nC)
- Improved dv/dt Capability
- 100% Avalanche Tested

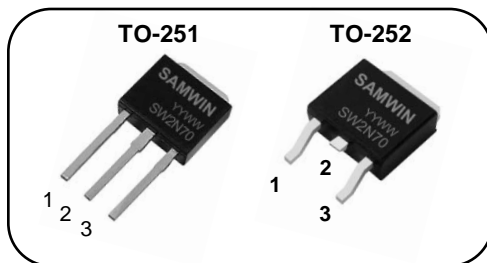

1. Gate 2. Drain 3. Source

$BV_{DSS}$ :	700V
$I_D$ :	2A
$R_{DS(ON)}$ :	7ohm



### General Description

This power MOSFET is produced with advanced VDMOS technology of SAMWIN. This technology enable power MOSFET to have better characteristics, such as fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics. This power MOSFET is usually used at AC adaptors and SMPS.

### Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW I 2N70	SW2N70	TO-251	TUBE
2	SW D 2N70	SW2N70	TO-252	REEL

### Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain to Source Voltage	700	V
$I_D$	Continuous Drain Current (@ $T_C=25^\circ C$ )	2.0*	A
	Continuous Drain Current (@ $T_C=100^\circ C$ )	1.3*	A
$I_{DM}$	Drain current pulsed (note 1)	8.0	A
$V_{GS}$	Gate to Source Voltage	$\pm 30$	V
$E_{AS}$	Single pulsed Avalanche Energy (note 2)	180	mJ
$E_{AR}$	Repetitive Avalanche Energy (note 1)	16	mJ
dv/dt	Peak diode Recovery dv/dt (note 3)	5	V/ns
$P_D$	Total power dissipation (@ $T_C=25^\circ C$ )	120	W
	Derating Factor above 25°C	0.96	W/°C
$T_{STG}, T_J$	Operating Junction Temperature & Storage Temperature	-55 ~ + 150	°C
$T_L$	Maximum Lead Temperature for soldering purpose, 1/8 from Case for 5 seconds.	300	°C

\*. Drain current is limited by junction temperature.

### Thermal characteristics

Symbol	Parameter	Value	Unit
$R_{thjc}$	Thermal resistance, Junction to case	1.05	°C/W
$R_{thCS}$	Thermal resistance, Junction to Lead Max	40	°C/W
$R_{thjA}$	Thermal resistance, Junction to ambient	120	°C/W

Electrical characteristic (  $T_C = 25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>Off characteristics</b>						
$BV_{DSS}$	Drain to source breakdown voltage	$V_{GS}=0V, I_D=250\mu A$	700	-	-	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu A$ , referenced to $25^\circ\text{C}$	-	0.70	-	$V/^\circ\text{C}$
$I_{DSS}$	Drain to source leakage current	$V_{DS}=700V, V_{GS}=0V$	-	-	1	$\mu A$
		$V_{DS}=560V, T_C=125^\circ\text{C}$	-	-	100	$\mu A$
$I_{GSS}$	Gate to source leakage current, forward	$V_{GS}=30V, V_{DS}=0V$	-	-	100	nA
	Gate to source leakage current, reverse	$V_{GS}=-30V, V_{DS}=0V$	-	-	-100	nA
<b>On characteristics</b>						
$V_{GS(TH)}$	Gate threshold voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
$R_{DS(ON)}$	Drain to source on state resistance	$V_{GS}=10V, I_D = 1.0A$	-	5.3	7.0	$\Omega$
$G_{fs}$	Forward Transconductance	$V_{DS} = 40 V, I_D = 1A$	1.5	-	-	S
<b>Dynamic characteristics</b>						
$C_{iss}$	Input capacitance	$V_{GS}=0V, V_{DS}=25V, f=1\text{MHz}$	-	450	530	pF
$C_{oss}$	Output capacitance		-	45	50	
$C_{riss}$	Reverse transfer capacitance		-	9	10	
$t_{d(on)}$	Turn on delay time	$V_{DS}=350V, I_D=2A, R_G=25\Omega$ (note 4, 5)	-	7	55	ns
$t_r$	Rising time		-	22	90	
$t_{d(off)}$	Turn off delay time		-	40	100	
$t_f$	Fall time		-	26	70	
$Q_g$	Total gate charge	$V_{DS}=560V, V_{GS}=10V, I_D=2A$ (note 4, 5)	-	11	30	nC
$Q_{gs}$	Gate-source charge		-	0.8	-	
$Q_{gd}$	Gate-drain charge		-	6.5	-	

## Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_S$	Continuous source current	Integral reverse p-n Junction diode in the MOSFET	-	-	2	A
$I_{SM}$	Pulsed source current		-	-	8	A
$V_{SD}$	Diode forward voltage drop.	$I_S=2A, V_{GS}=0V$	-	-	1.5	V
$T_{rr}$	Reverse recovery time	$I_S=2A, V_{GS}=0V,$	-	345	-	ns
$Q_{rr}$	Breakdown voltage charge	$di_f/dt=100\mu A/\mu s$	-	1.5	-	$\mu C$

## ※. Notes

1. Repeattive rating : pulse width limited by junction temperature.
2.  $L = 90\text{mH}, I_{AS} = 2A, V_{DD} = 50V, R_G=25\Omega$ , Starting  $T_J = 25^\circ\text{C}$
3.  $I_{SD} \leq 2.0A, di/dt = 100A/\mu s, V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse Width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$
5. Essentially independent of operating temperature.

Fig. 1. On-state characteristics

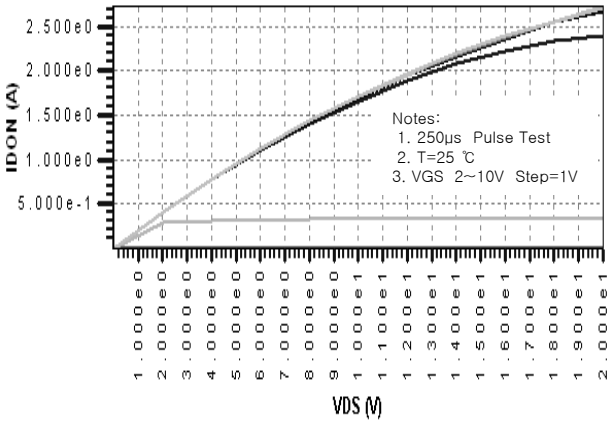


Fig. 2. On-resistance variation vs. drain current and gate voltage

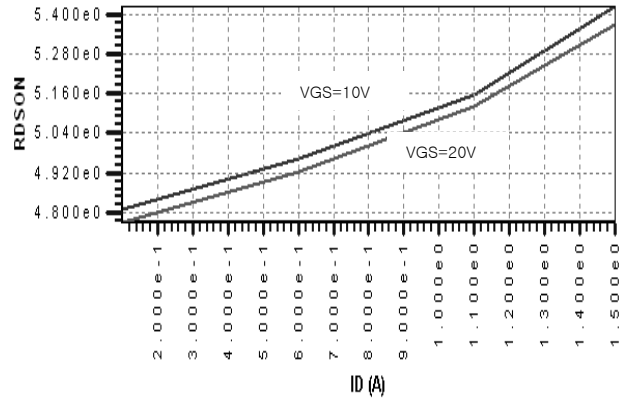


Fig. 3. Gate charge characteristics

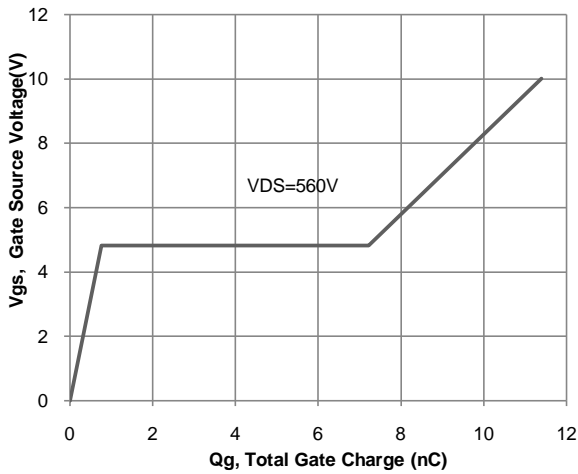


Fig. 4. On state current vs. diode forward voltage

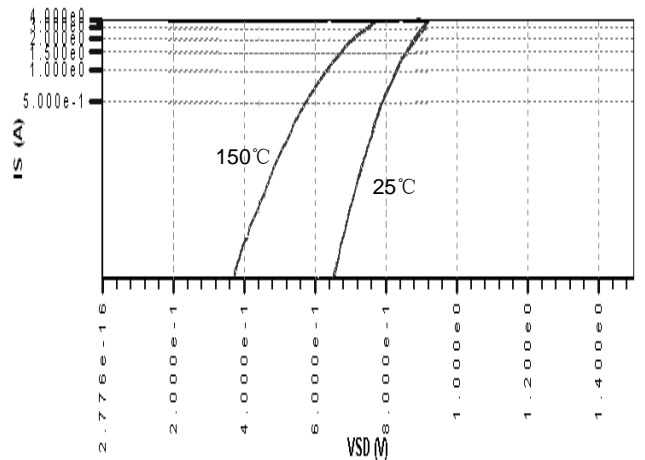


Fig 5. Breakdown Voltage Variation vs. Junction Temperature

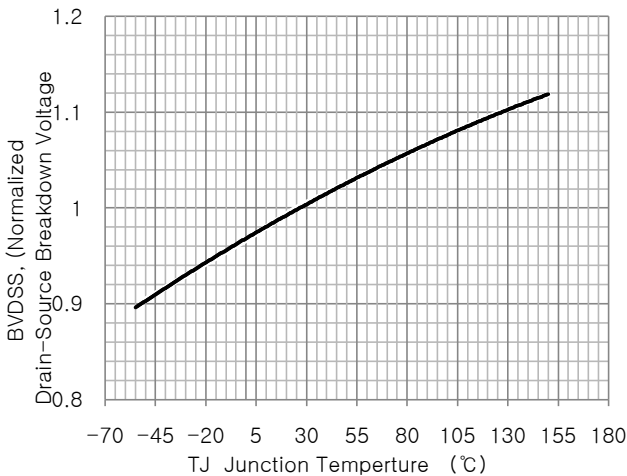


Fig. 6. On resistance variation vs. junction temperature

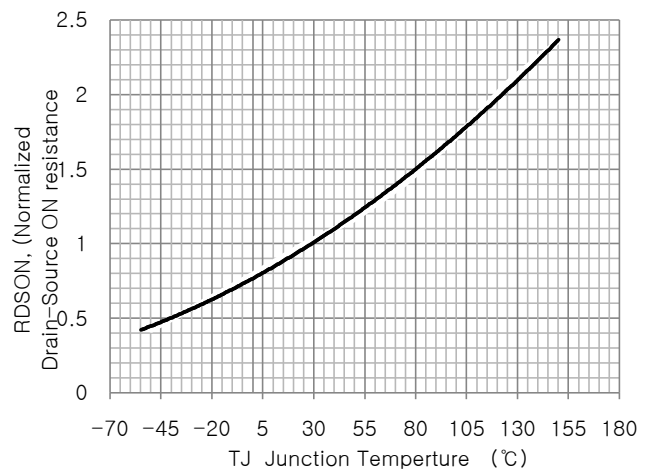


Fig. 7. Maximum safe operating area

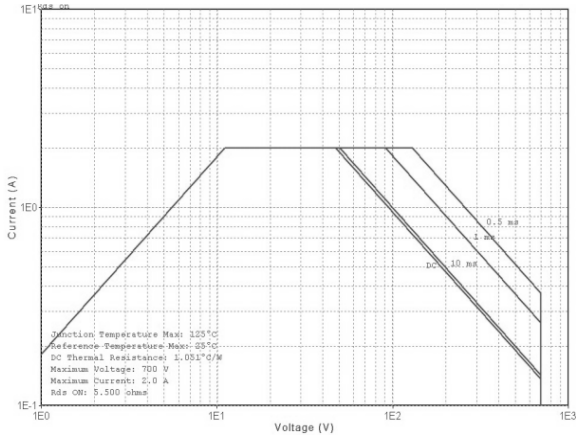


Fig. 8. Transient thermal response curve

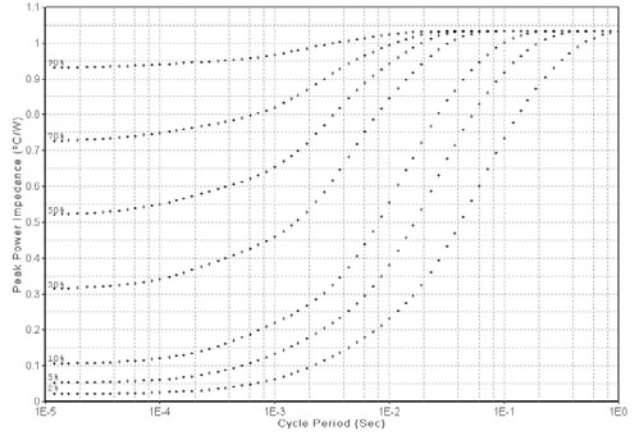


Fig. 9. Gate charge test circuit & waveform

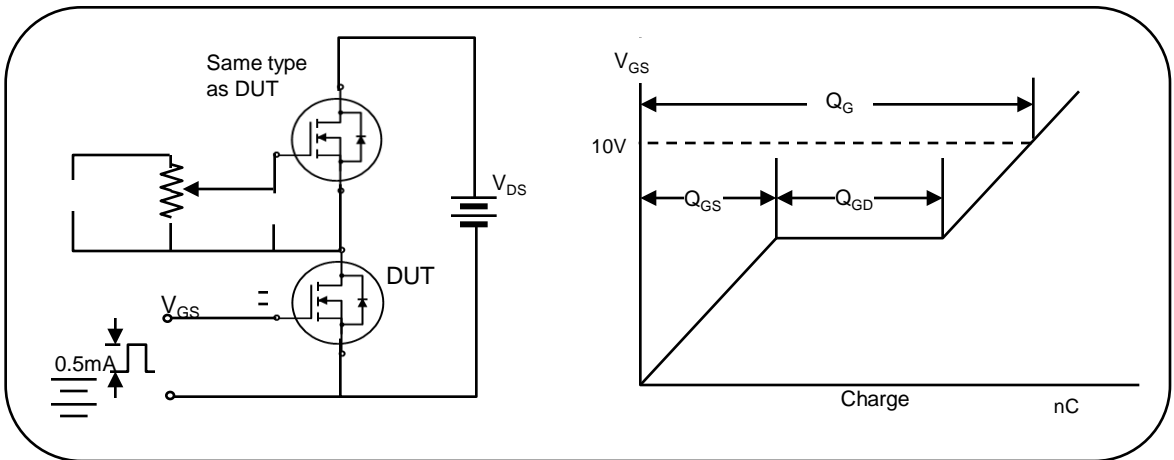


Fig. 10. Switching time test circuit & waveform

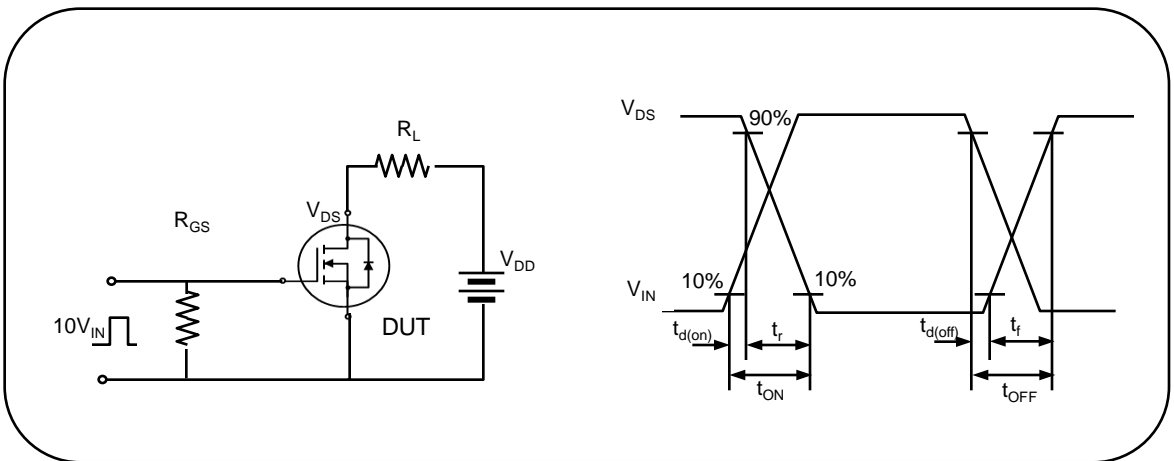


Fig. 11. Unclamped Inductive switching test circuit & waveform

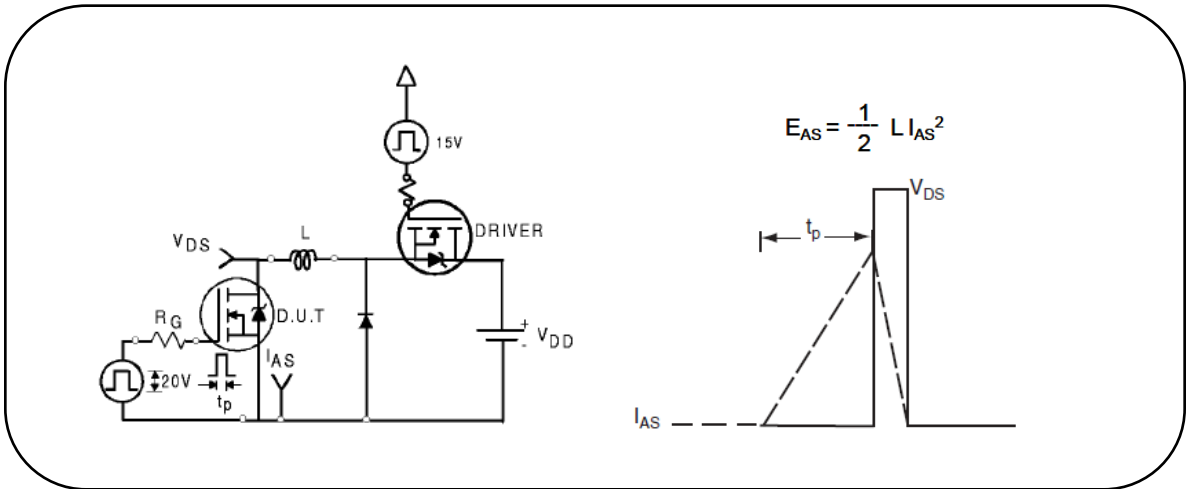


Fig. 12. Peak diode recovery dv/dt test circuit & waveform

