

- 1N4614 THRU 1N4627 AVAILABLE IN JANHC AND JANKC PER MIL-PRF-19500/435
- ZENER DIODE CHIPS
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- ELECTRICALLY EQUIVALENT TO 1N4614 THRU 1N4627
- 0.5 WATT CAPABILITY WITH PROPER HEAT SINKING
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES, WITH THE EXCEPTION OF SOLDER REFLOW

CD4614
thru
CD4627

MAXIMUM RATINGS


Operating Temperatures: -65°C to +175°C
Storage Temperatures: -65°C to +175°C
Forward Voltage @ 200 mA: 1.5 Volts maximum

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

TYPE NUMBER	NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$	MAXIMUM REVERSE LEAKAGE CURRENT $I_R @ V_R$	
	(Note 1) VOLTS	μA	(Note 2) OHMS	μA	VOLTS
CD4614	1.8	250	1200	7.5	1
CD4615	2.0	250	1250	5.0	1
CD4616	2.2	250	1300	4.0	1
CD4617	2.4	250	1400	2.0	1
CD4618	2.7	250	1500	1.0	1
CD4619	3.0	250	1600	0.8	1
CD4620	3.3	250	1650	7.5	1.5
CD4621	3.6	250	1700	7.5	2
CD4622	3.9	250	1650	5.0	2
CD4623	4.3	250	1600	4.0	2
CD4624	4.7	250	1550	10.0	3
CD4625	5.1	250	1500	10.0	3
CD4626	5.6	250	1400	10.0	4
CD4627	6.2	250	1200	10.0	5

NOTE 1 Zener voltage range equals nominal Zener voltage $\pm 5\%$ for no suffix types. Zener voltage is read using a pulse measurement, 10 milliseconds maximum. "C" suffix = $\pm 2\%$ tolerance and "D" suffix = $\pm 1\%$ tolerance.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

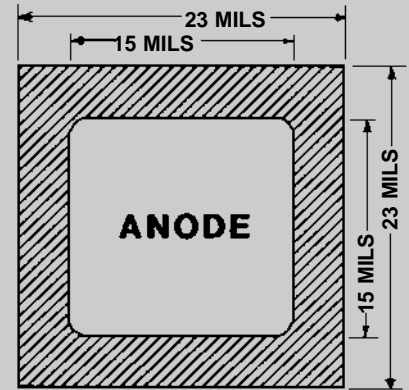

BACKSIDE IS CATHODE

FIGURE 1

DESIGN DATA

METALLIZATION:

Top: (Anode)..... .Al
Back: (Cathode)..... .Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS.....4,000 Å Min

CHIP THICKNESS.....10 Mils

CIRCUIT LAYOUT DATA:

For Zener operation, cathode must be operated positive with respect to anode.

TOLERANCES: ALL

Dimensions ± 2 mils



CD4614 thru CD4627

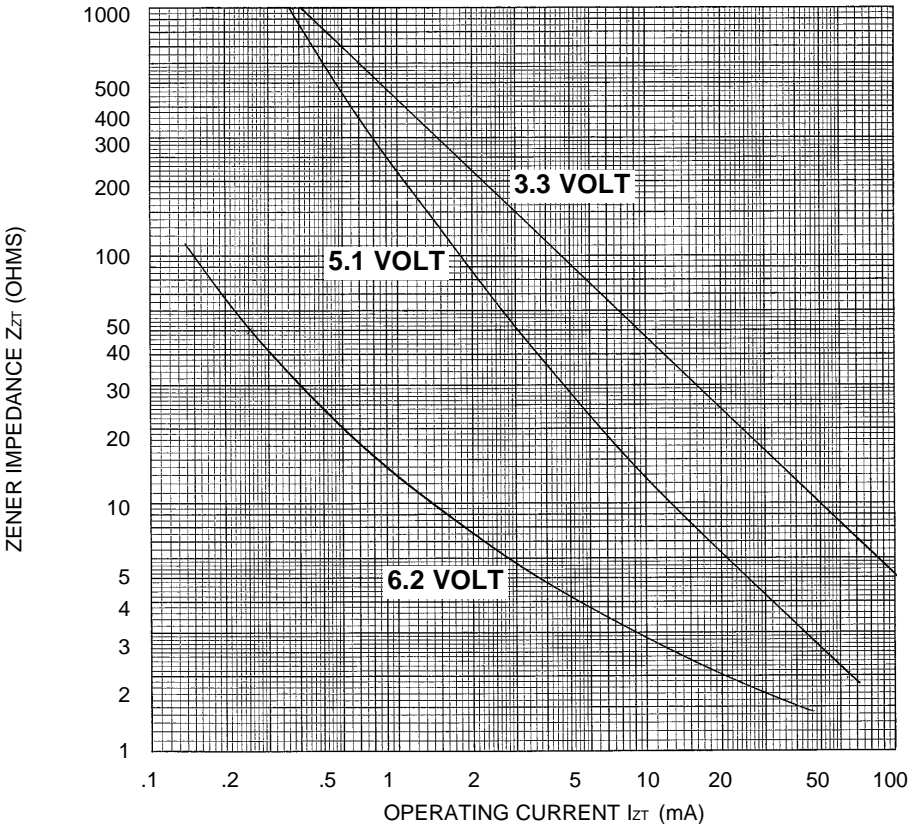


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT