




- ▼ Simple Drive Requirement
- ▼ Small Package Outline
- ▼ Surface Mount Device




BV_{DSS}	-30V
$R_{DS(ON)}$	75mΩ
I_D	- 3.7A

Description

Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, low on-resistance and cost-effectiveness.

The SOT-23 package is widely preferred for commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	- 30	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current ³	- 3.7	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current ³	- 3	A
I_{DM}	Pulsed Drain Current ¹	-12	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation	1.38	W
	Linear Derating Factor	0.01	W/°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Unit
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient ³	90	°C/W



Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-30	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=-1\text{mA}$	-	-0.02	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-3\text{A}$	-	-	75	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-2.6\text{A}$	-	-	120	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-3\text{A}$	-	5	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	uA
	Drain-Source Leakage Current ($T_j=55^\circ\text{C}$)	$V_{\text{DS}}=-24\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-25	uA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}$	-	-	± 100	nA
Q_g	Total Gate Charge ²	$I_{\text{D}}=-3\text{A}$	-	5	8	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=-24\text{V}$	-	1	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	3	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time ²	$V_{\text{DS}}=-15\text{V}$	-	8	-	ns
t_r	Rise Time	$I_{\text{D}}=-1\text{A}$	-	5	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=-10\text{V}$	-	20	-	ns
t_f	Fall Time	$R_D=15\Omega$	-	7	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	412	660	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	91	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	62	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_S=-1.2\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
t_{rr}	Reverse Recovery Time ²	$I_S=-3\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	20	-	ns
Q_{rr}	Reverse Recovery Charge		-	15	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in² copper pad of FR4 board ; $270^\circ\text{C}/\text{W}$ when mounted on min. copper pad.

THIS PRODUCT IS AN ELECTROSTATIC SENSITIVE, PLEASE HANDLE WITH CAUTION.

THIS PRODUCT HAS BEEN QUALIFIED FOR CONSUMER MARKET. APPLICATIONS OR USES AS CRITERIAL COMPONENT IN LIFE SUPPORT DEVICE OR SYSTEM ARE NOT AUTHORIZED.

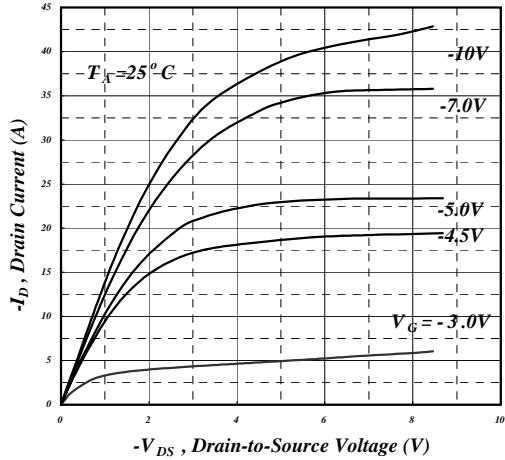


Fig 1. Typical Output Characteristics

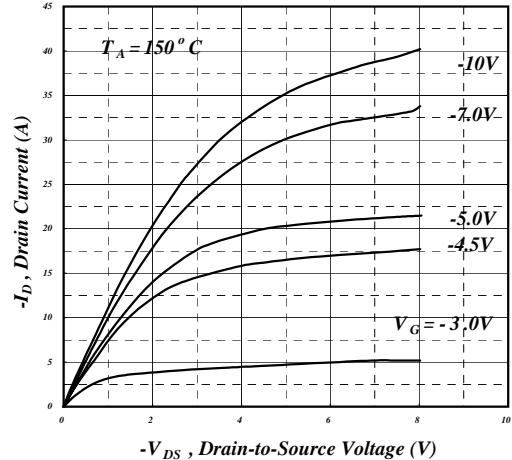


Fig 2. Typical Output Characteristics

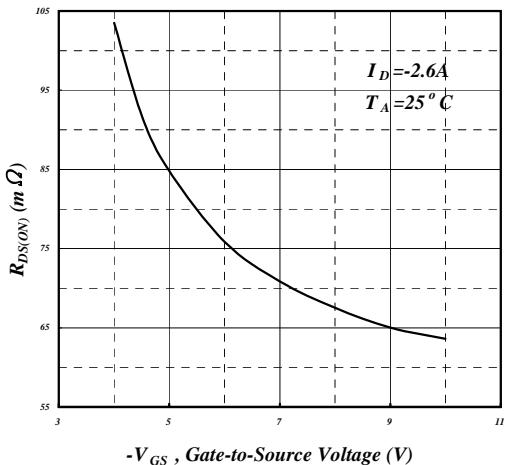


Fig 3. On-Resistance v.s. Gate Voltage

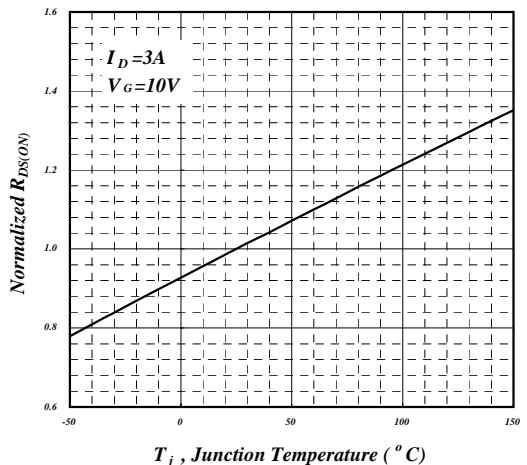


Fig 4. Normalized On-Resistance v.s. Junction Temperature

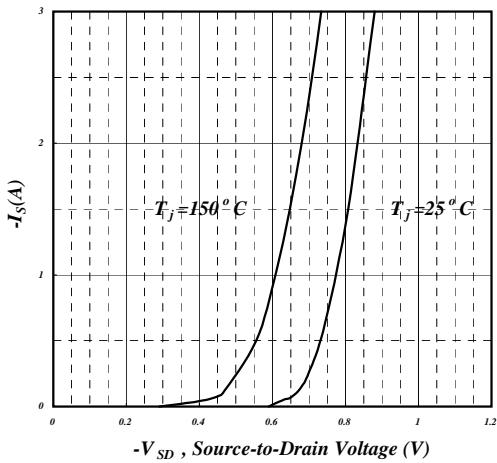


Fig 5. Forward Characteristic of Reverse Diode








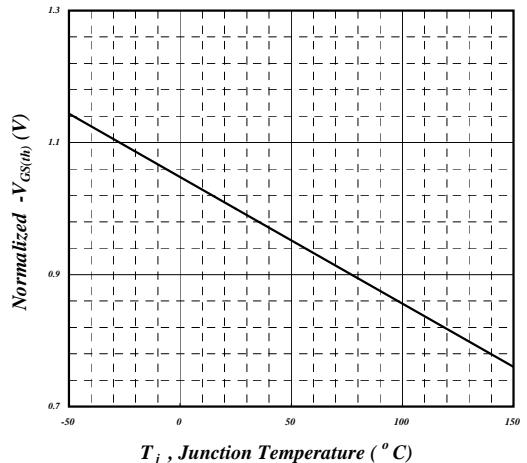


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

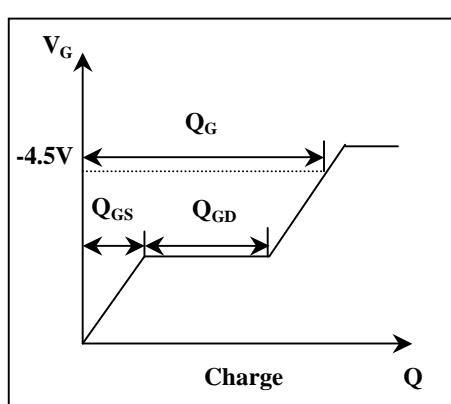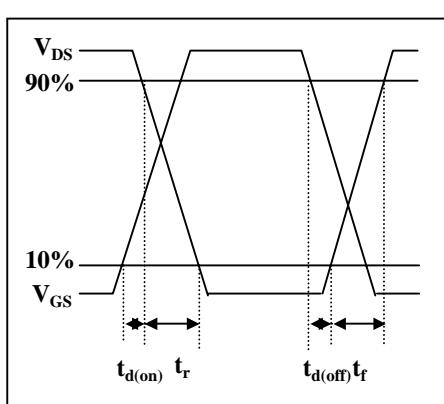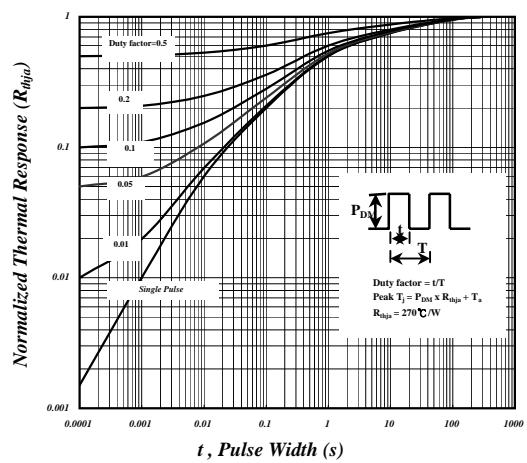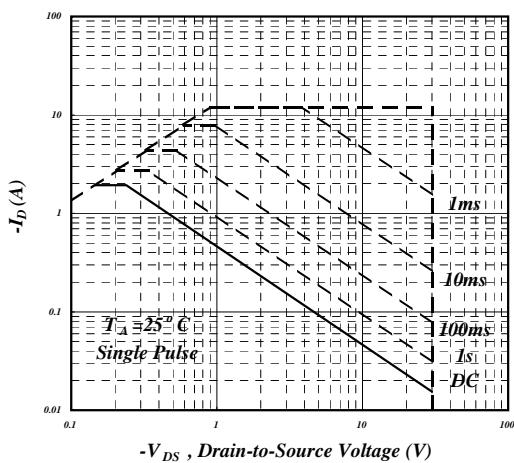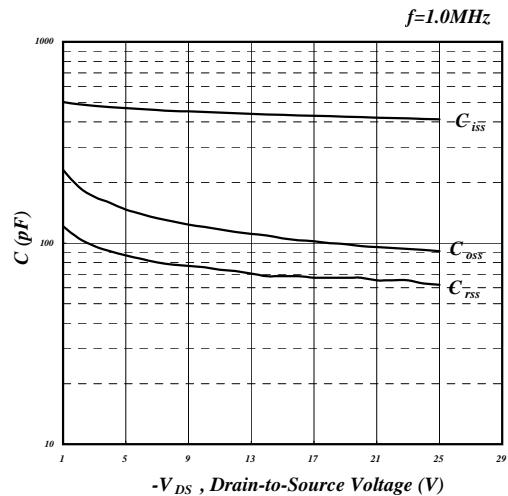


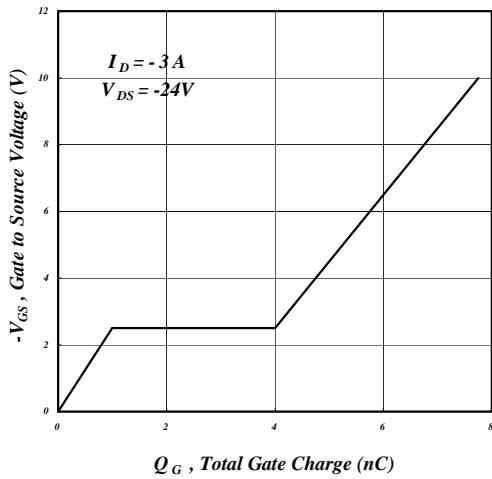

Package Outline : SOT-23

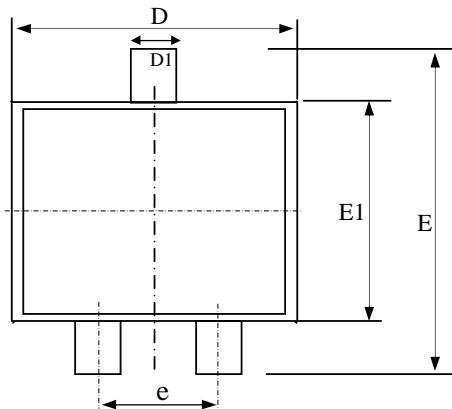

SYMBOLS	Millimeters		
	MIN	NOM	MAX
A	1.00	1.15	1.30
A1	0.00	--	0.10
A2	0.10	0.15	0.25
D1	0.30	0.40	0.50
e	1.70	2.00	2.30
D	2.70	2.90	3.10
E	2.40	2.65	3.00
E1	1.40	1.50	1.60

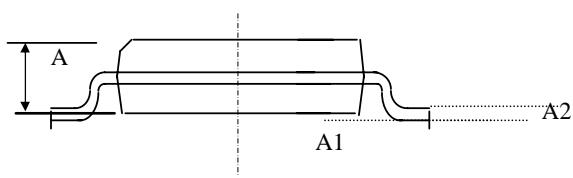

1. All Dimension Are In Millimeters.
2. Dimension Does Not Include Mold Protrusions.

Part Marking Information & Packing : SOT-23

