


**CMLM0708A**  
**MULTI DISCRETE MODULE™**  
**SURFACE MOUNT**  
**N-CHANNEL AND P-CHANNEL**  
**COMPLEMENTARY MOSFETS**



[www.centralemi.com](http://www.centralemi.com)

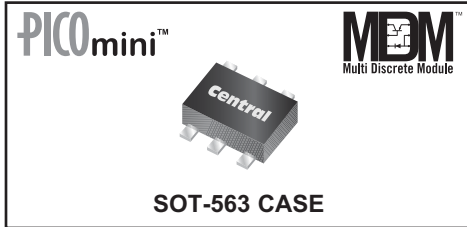

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMLM0708A is a Multi Discrete Module™ consisting of complementary N-Channel and P-Channel Enhancement-mode MOSFETS packaged in a space saving PICOmini™ SOT-563 case. This device is designed for small signal general purpose applications where size and operational efficiency are prime requirements.

**MARKING CODE: C78**

**FEATURES:**

- Dual Complementary MOSFETS
- Low  $r_{DS(ON)}$  ( $3\Omega$  MAX @  $V_{GS}=5.0V$ )
- Small SOT-563 Surface Mount Package

**APPLICATIONS:**

- Switching Circuits
- DC/DC Converters
- Battery Powered Portable Equipment including Cell Phones, Digital Cameras, Pagers, PDAs, Notebook PCs, etc.

**MAXIMUM RATINGS - CASE: ( $T_A=25^\circ C$ )**

Power Dissipation (Note 1)  
 Power Dissipation (Note 2)  
 Power Dissipation (Note 3)  
 Operating and Storage Junction Temperature  
 Thermal Resistance

SYMBOL		UNITS
$P_D$	350	mW
$P_D$	300	mW
$P_D$	150	mW
$T_J, T_{stg}$	-65 to +150	$^\circ C$
$\theta_{JA}$	357	$^\circ C/W$

**MAXIMUM RATINGS: ( $T_A=25^\circ C$ )**

Drain-Source Voltage  
 Drain-Gate Voltage  
 Gate-Source Voltage  
 Continuous Drain Current  
 Continuous Source Current (Body Diode)  
 Maximum Pulsed Drain Current  
 Maximum Pulsed Source Current

SYMBOL	N-Ch (Q1)	P-Ch (Q2)	UNITS
$V_{DS}$	60	50	V
$V_{DG}$	60	50	V
$V_{GS}$	40	20	V
$I_D$	280	280	mA
$I_S$	280	280	mA
$I_{DM}$	1.5	1.5	A
$I_{SM}$	1.5	1.5	A

**ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ C$  unless otherwise noted)**

SYMBOL	TEST CONDITIONS	N-Ch (Q1)		P-Ch (Q2)		UNITS
		MIN	MAX	MIN	MAX	
$I_{GSSF}, I_{GSSR}$	$V_{GS}=20V, V_{DS}=0$	-	100	-	100	nA
$I_{DSS}$ (N-Ch)	$V_{DS}=60V, V_{GS}=0$	-	1.0	-	-	$\mu A$
$I_{DSS}$ (P-Ch)	$V_{DS}=50V, V_{GS}=0$	-	-	-	1.0	$\mu A$
$I_{DSS}$ (N-Ch)	$V_{DS}=60V, V_{GS}=0, T_J=125^\circ C$	-	500	-	-	$\mu A$
$I_{DSS}$ (P-Ch)	$V_{DS}=50V, V_{GS}=0, T_J=125^\circ C$	-	-	-	500	$\mu A$
$I_{D(ON)}$ (N-Ch)	$V_{GS}=10V, V_{DS}=10V$	500	-	-	-	mA
$I_{D(ON)}$ (P-Ch)	$V_{GS}=10V, V_{DS}=10V$	-	-	500	-	mA
$BV_{DSS}$	$V_{GS}=0, I_D=10\mu A$	60	-	50	-	V

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of  $4.0mm^2$   
 (2) FR-4 Epoxy PC Board with copper mounting pad area of  $4.0mm^2$   
 (3) FR-4 Epoxy PC Board with copper mounting pad area of  $1.4mm^2$

R1 (18-January 2010)


**CMLM0708A**  
**MULTI DISCRETE MODULE™**  
**SURFACE MOUNT**  
**N-CHANNEL AND P-CHANNEL**  
**COMPLEMENTARY MOSFETS**



**ELECTRICAL CHARACTERISTICS - Continued:**

SYMBOL	TEST CONDITIONS	N-Ch (Q1)		P-Ch (Q2)		UNITS
		MIN	MAX	MIN	MAX	
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	2.5	1.0	2.5	V
$V_{DS(ON)}$	$V_{GS}=10V, I_D=500mA$	-	1.0	-	1.5	V
$V_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA$	-	0.15	-	0.15	V
$V_{SD}$ (N-Ch)	$V_{GS}=0, I_S=400mA$	-	1.2	-	-	V
$V_{SD}$ (P-Ch)	$V_{GS}=0, I_S=115mA$	-	-	-	1.3	V
$r_{DS(ON)}$	$V_{GS}=10V, I_D=500mA$	-	2.0	-	2.5	$\Omega$
$r_{DS(ON)}$	$V_{GS}=10V, I_D=500mA, T_J=125^\circ C$	-	3.5	-	4.0	$\Omega$
$r_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA$	-	3.0	-	3.0	$\Omega$
$r_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA, T_J=125^\circ C$	-	5.0	-	5.0	$\Omega$
$g_{FS}$ (N-Ch)	$V_{DS}=10V, I_D=200mA$	80	-	-	-	mS
$g_{FS}$ (P-Ch)	$V_{DS}=10V, I_D=200mA$	-	-	200	-	mS
$C_{rss}$	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$	-	5.0	-	7.0	pF
$C_{iss}$	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$	-	50	-	70	pF
$C_{oss}$	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$	-	25	-	15	pF
$t_{on} / t_{off}$	$V_{DD}=30V, V_{GS}=10V, I_D=200mA$ $R_G=25\Omega, R_L=150\Omega$	-	20	-	20	ns

**SOT-563 CASE - MECHANICAL OUTLINE**

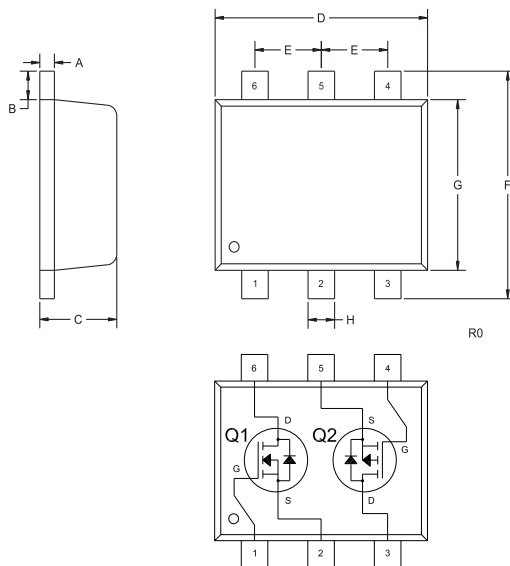

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.10	0.18
B	0.008		0.20	
C	0.022	0.024	0.56	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.061	0.067	1.55	1.70
G	0.047		1.20	
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R0)

**LEAD CODE:**

- 1) Gate Q1
- 2) Source Q1
- 3) Drain Q2
- 4) Gate Q2
- 5) Source Q2
- 6) Drain Q1

**MARKING CODE: C78**

R1 (18-January 2010)