


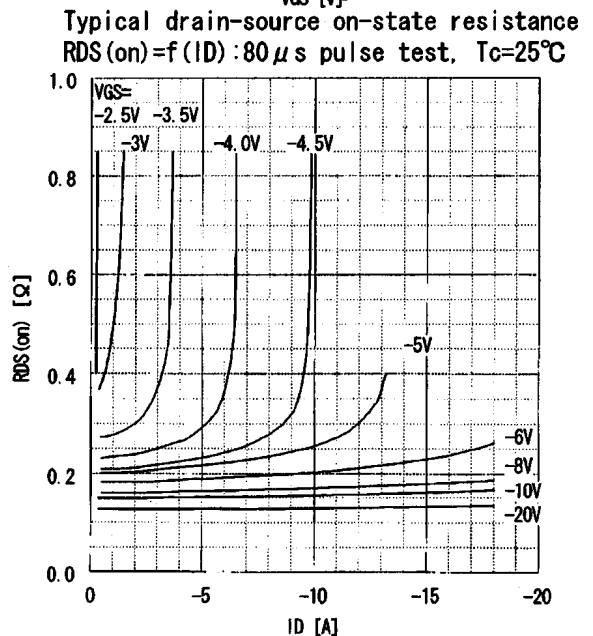
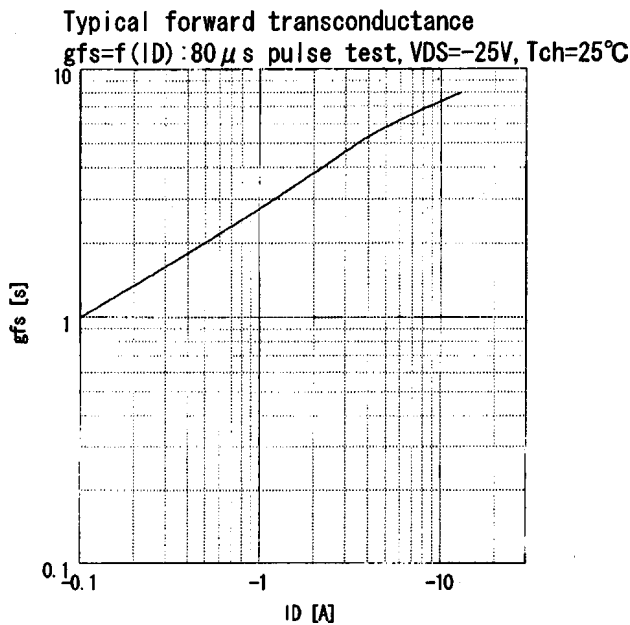
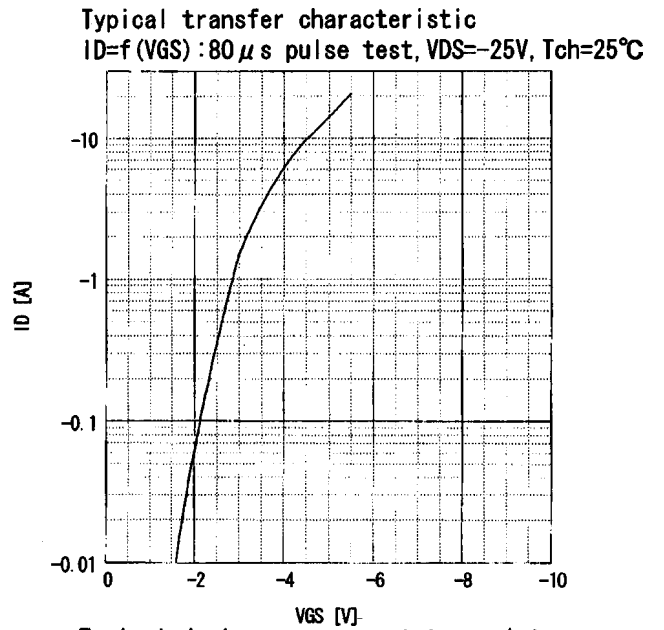
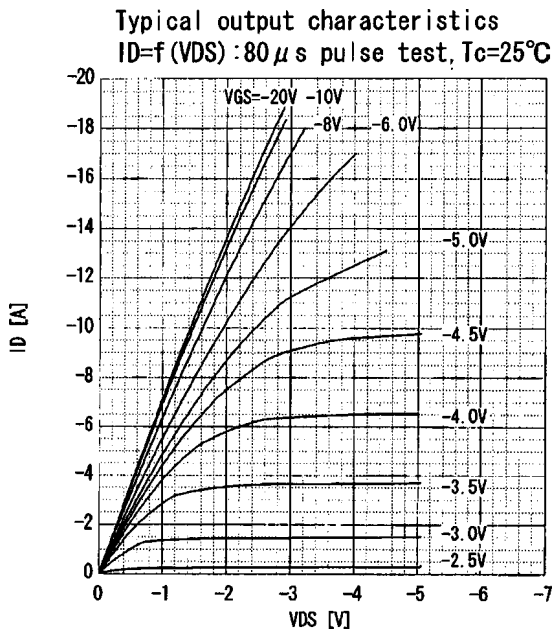
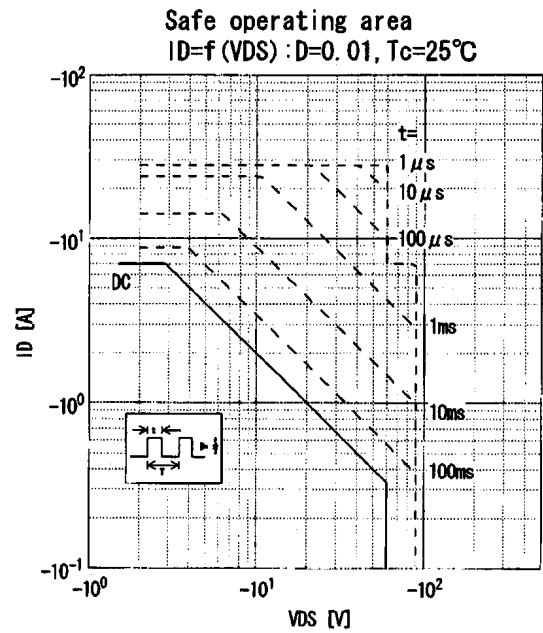
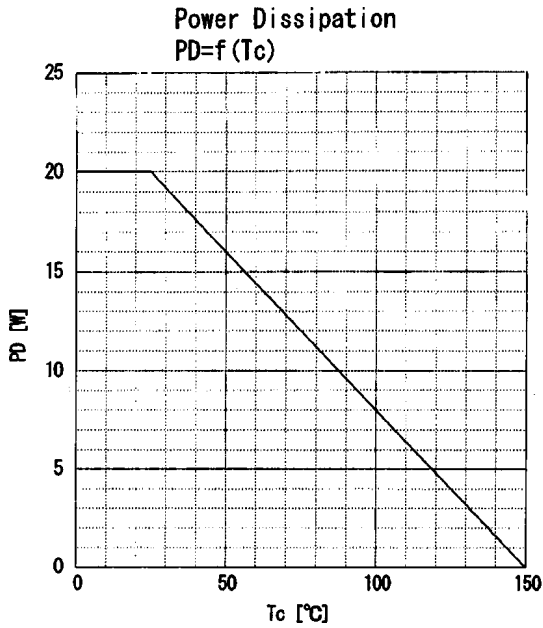
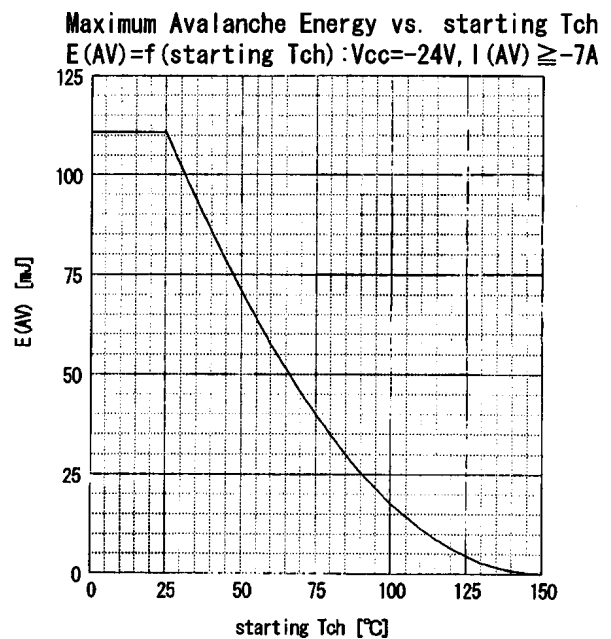
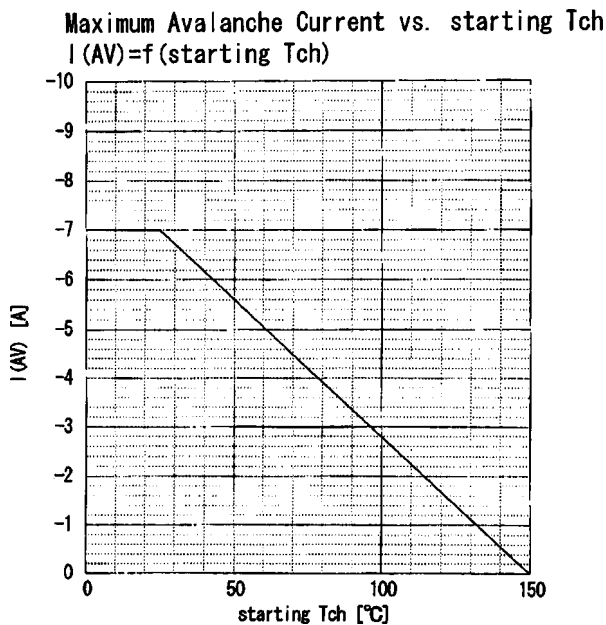
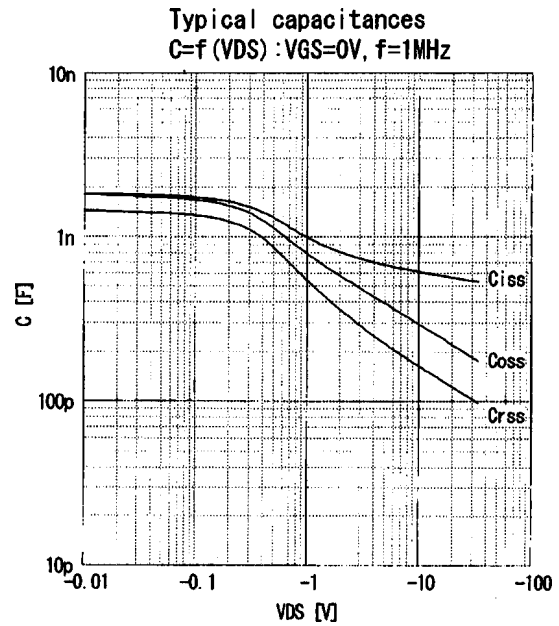


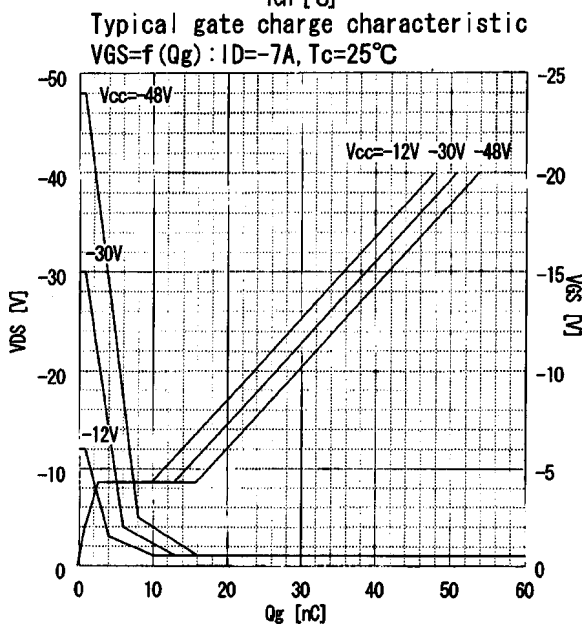


Characteristics

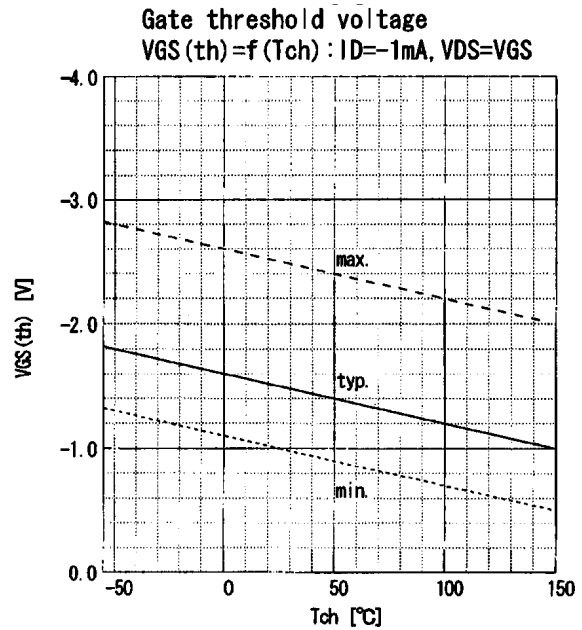

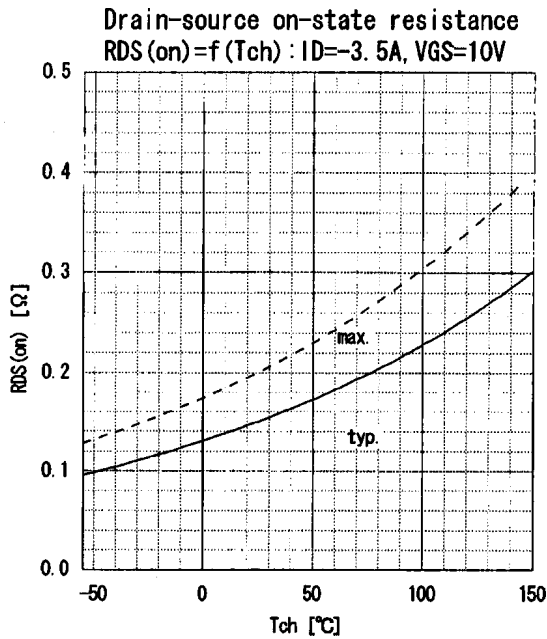

Forward characteristic of reverse of diode  
 $I_F=f(V_{SD}) : 80 \mu s$  pulses test,  $V_{GS}=0V$

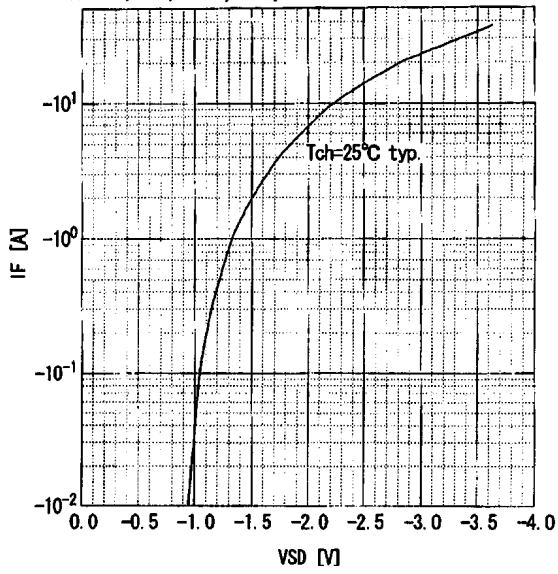

Transient thermal impedande  
 $Z_{thch}=f(t)$  parameter:  $D=t/T$

