



PRELIMINARY

SOLID STATE DEVICES, INC


SFF40N30B

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

Designer's Data Sheet

- FEATURES:**
- Rugged construction with polysilicon gate
 - Low RDS(on) and high transconductance
 - Excellent high temperature stability
 - Very fast switching speed
 - Fast recovery and superior dv/dt performance
 - Increased reverse energy capability
 - Low input and transfer capacitance for easy paralleling
 - Ceramic Seals for improved hermeticity
 - Hermetically sealed power surface mount package
 - TX, TXV and Space Level screening available
 - Replaces: IXTH40N30 Types

**40 AMP
300 VOLTS
0.10 Ω
N-CHANNEL
POWER MOSFET**

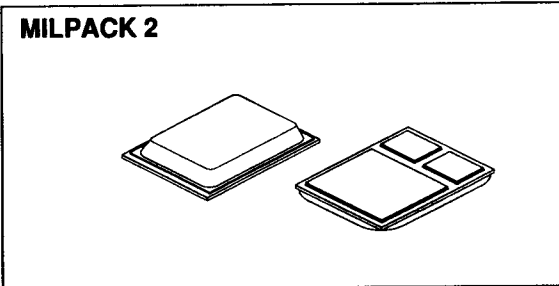


MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Drain to Source Voltage	V _{DS}	300	Volts
Gate to Source Voltage	V _{GS}	±20	Volts
Continuous Drain Current	I _D	40	Amps
Operating and Storage Temperature	Top & T _{stg}	-55 to +150	°C
Thermal Resistance, Junction to Case	R _{θJC}	0.5	°C/W
Total Device Dissipation @ TC=25°C	P _D	250	Watts
Total Device Dissipation @ TC=55°C		190	

PACKAGE OUTLINE: MILPACK 2

PIN OUT:

- PIN 1: DRAIN**
- PIN 2: SOURCE**
- PIN 3: GATE**

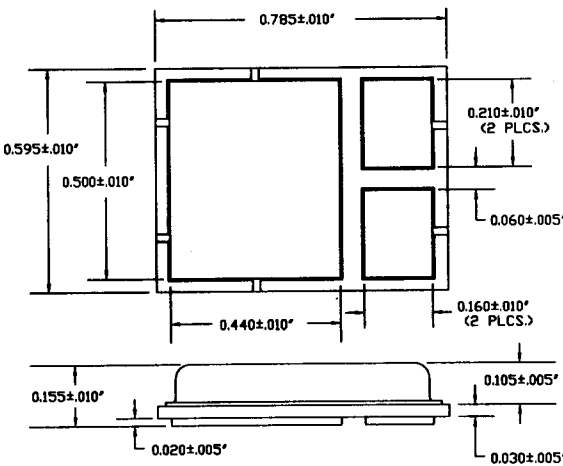

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: F00149 C

MED

SFF40N30B

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS @ T_J=25 °C (Unless Otherwise Specified)

RATING		SYMBOL	MIN	TYP	MAX	UNIT
Drain to Source Breakdown Voltage (V _{GS} =0 V, I _D =250μA)		BV_{DSS}	300	---	---	V
Drain to Source on State Resistance (V _{GS} =10 V, I _D =50% Rated ID)		R_{DS(on)}	---	---	0.10	Ω
On State Drain Current (V _{DS} > I _{D(on)} X R _{DS(on)} Max, V _{GS} =10 V)		I_{D(on)}	40	---	---	A
Gate Threshold Voltage (V _{DS} ≥ V _{GS} , I _D =4mA)		V_{GS(th)}	2.0	---	4.0	V
Forward Transconductance (V _{DS} > I _{D(on)} X R _{DS(on)} Max, I _{DS} =50% rated ID)		g_{fs}	22	25	---	S(Ω)
Zero Gate Voltage Drain Current (V _{DS} =max rated voltage, V _{GS} =0 V) (V _{DS} =80% rated V _{DS} , V _{GS} =0 V, T _A =125°C)		I_{DSS}	---	---	250 1000	μA
Gate to Source Leakage Forward Gate to Source Leakage Reverse	At rated V _{GS}	I_{GSS}	---	---	+100 -100	nA
Total Gate Charge Gate to Source Charge Gate to Drain Charge	V _{GS} =10 Volts 50% rated V _{DS} 50% Rated ID	Q_g Q_{gs} Q_{gd}	---	177 28 78	200 50 105	nC
Turn on Delay Time Rise Time Turn Off Delay Time Fall Time	V _{DD} =50% rated V _{DS} 50% rated ID R _G = 2.0 Ω V _{GS} =10V	t_{d(on)} t_r t_{d(off)} t_f	---	30 60 175 45	50 90 250 90	nsec
Diode Forward Voltage (I _S =rated ID, V _{GS} =0 V, T _J =25°C)		V_{SD}	---	---	1.5	V
Diode Reverse Recovery Time Reverse Recovery Charge	T _J =25°C I _F =rated ID di/dt=100 A/μsec	t_{rr} Q_{RR}	---	---	325 ---	nsec μC
Input Capacitance Output Capacitance Reverse Transfer Capacitance	V _{GS} =0 Volts V _{DS} =25 Volts f= 1 MHz	C_{iss} C_{oss} C_{rss}	---	4800 745 283	---	pF

For thermal derating curves and other characteristic curves please contact SSDI Marketing Department.