



DC-DC CONVERTERS RELAY DRIVERS, LAMP DRIVERS,  
MOTOR DRIVERS, STROBES APPLICATION.

#### FEATURES

- Adoption of FBET, MBIT Processes.
- High Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High-Speed Switching.
- High Allowable Power Dissipation.

#### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	80	V
Collector-Emitter Voltage		$V_{CES}$	80	V
		$V_{CEO}$	50	
Emitter-Base Voltage		$V_{EBO}$	6	V
Collector Current	DC	$I_C$	8	A
	Pulse	$I_{CP}$	11	A
Base Current		$I_B$	2	A
Collector Power Dissipation	Ta=25°C	$P_C$	1.0	W
	Tc=25°C		15	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C





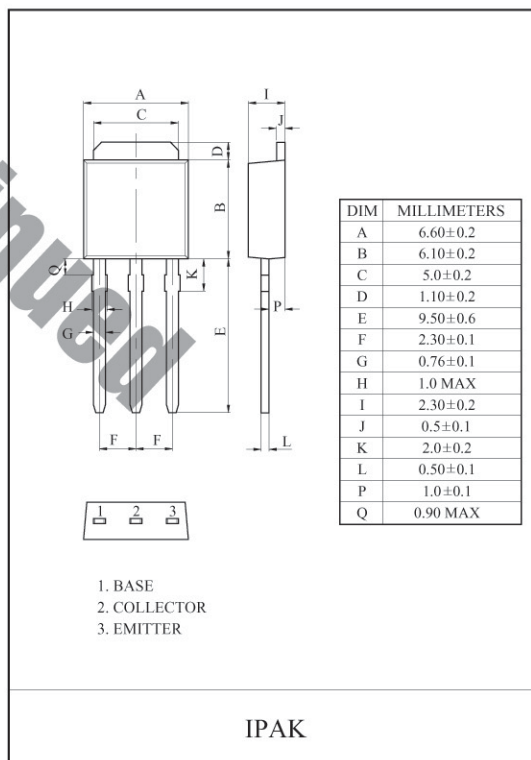
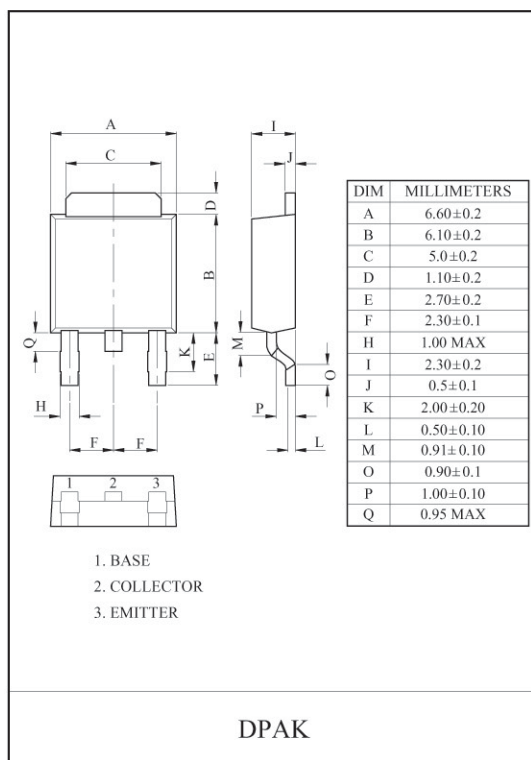


# KTC5707D/L

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=40V, I_E=0$	-	-	0.1	$\mu A$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=4V, I_C=0$	-	-	0.1	$\mu A$
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	80	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CES}$	$I_C=100\mu A, V_{BE}=0$	80	-	-	V
		$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	50	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6	-	-	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)1}$	$I_C=2A, I_B=40mA$	-	110	170	mV
		$V_{CE(sat)2}$	$I_C=3.5A, I_B=175mA$	-	160	240	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=2A, I_B=40mA$	-	0.83	1.2	V
DC Current Gain		$h_{FE}$	$V_{CE}=2V, I_C=500mA$	200	-	560	-
Transition Frequency		$f_T$	$V_{CE}=10V, I_C=500mA$	-	330	-	MHz
Collector Output Capacitance		$C_{ob}$	$V_{CB}=10V, f=1MHz$	-	28	-	pF
Switching Time	Turn-On Time	$t_{on}$	<p style="text-align: center;"> <math>PW=20\mu s</math>  <math>DC \leq 1\%</math>  <math>V_{BE}=-5V</math>  <math>20I_{B1}=20I_{B2}=I_C=2.5A</math> </p>	-	30	-	nS
	Storage Time	$t_{stg}$		-	420	-	
	Fall Time	$t_f$		-	25	-	

# KTC5707D/L

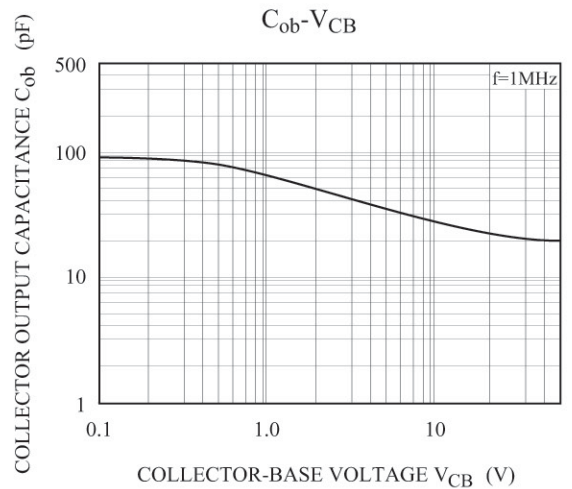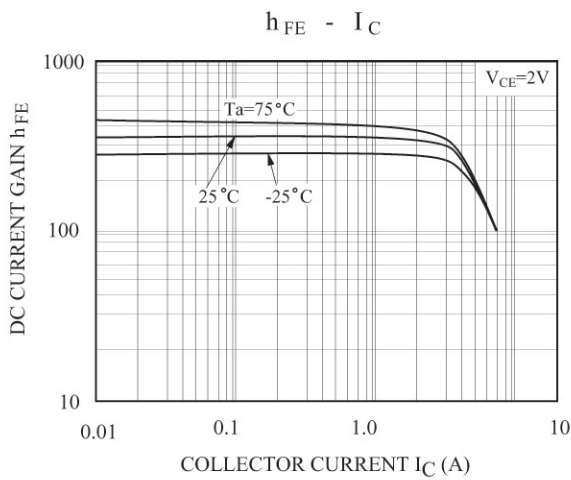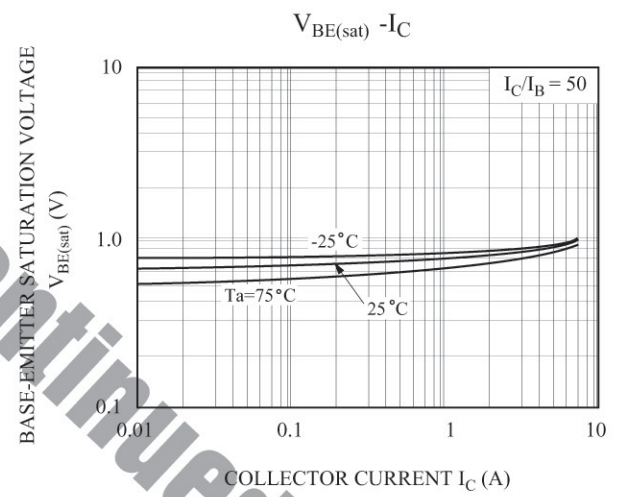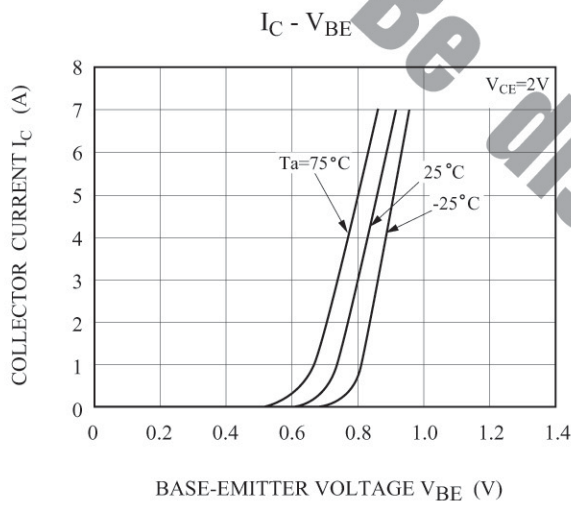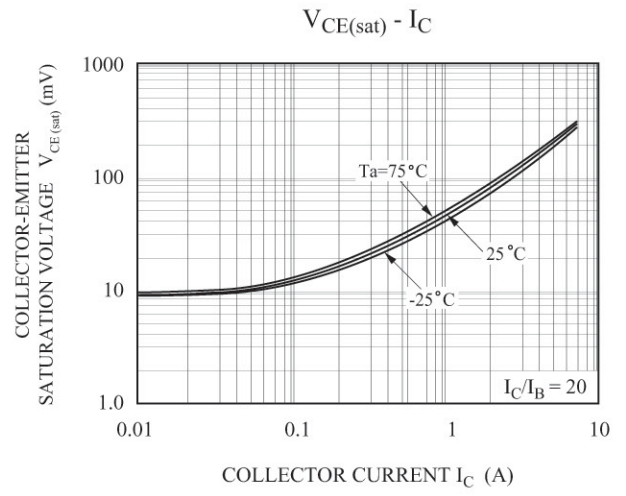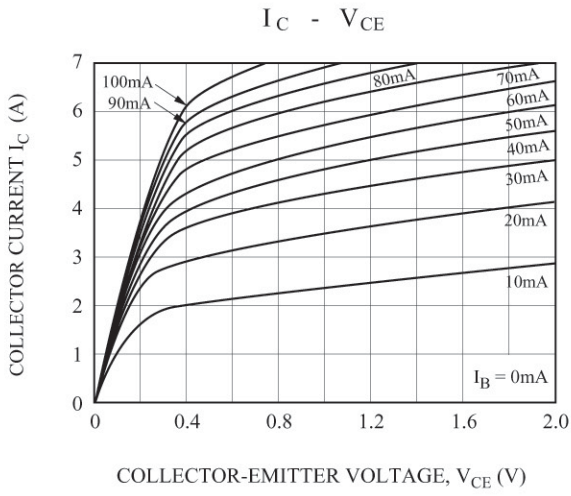

# KTC5707D/L

