


DIFFERENTIAL AMP. APPLICATION.

### FEATURES

- Matched Pairs for Differential Amplifiers.
- High Breakdown Voltage :  $V_{CE0} = -120V(\text{Min.})$ .
- Low Noise :  $NF = 1\text{dB}(\text{Typ.}), 10\text{dB}(\text{Max.})$ .
- Complementary to KTC3400.

### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-120	V
Collector-Emitter Voltage	$V_{CEO}$	-120	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Emitter Current	$I_E$	100	mA
Collector Power Dissipation	$P_C$	625	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	

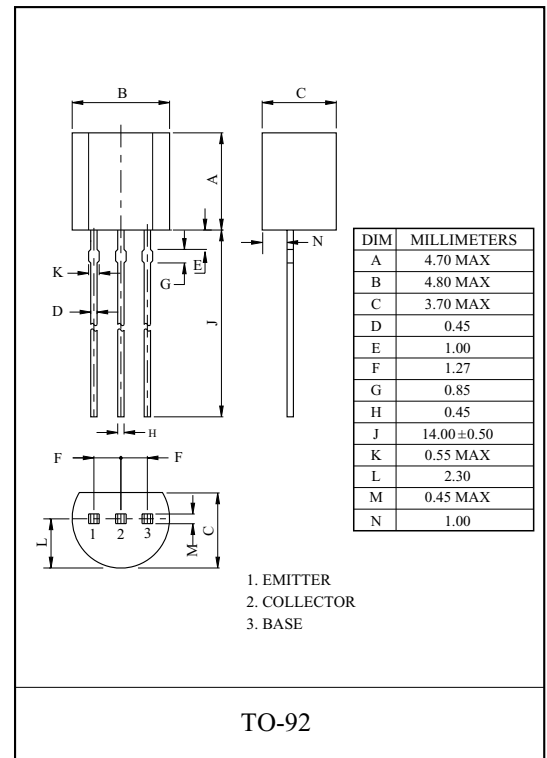

### ELECTRICAL CHARACTERISTICS (Ta=25 )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = -120V, I_E = 0$	-	-	-100	nA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = -5V, I_C = 0$	-	-	-100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1mA, I_B = 0$	-120	-	-	V
DC Current Gain	$h_{FE}$ (Note)	$V_{CE} = -6V, I_C = -2mA$	200	-	400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -1mA$	-	-	-0.3	V
Transition Frequency	$f_T$	$V_{CE} = -6V, I_C = -1mA$	-	100	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	4.0	-	pF
Noise Figure	NF	$V_{CE} = -6V, I_C = -0.1mA, f = 1kHz, R_g = 10k$	-	1.0	10	dB

Note :  $h_{FE}$  Classification G :200 400, In case of G , :A to G, GR: 200~400

$h_{FE}$ Classification	$h_{FE}$	$h_{FE}$ Classification	$h_{FE}$
GA	200 220	GE	310 340
GB	220 250	GF	340 370
GC	250 280	GG	370 400
GD	280 310		

# KTA2400

