

RELAY DRIVE, HAMMER DIRVE, LAMP DRIVE.
STROBO, DC-DC CONVERTER, MOTOR DRIVE.


FEATURES

- Low Saturation Voltage.
: $V_{CE(sat)}=0.5V(\text{Max.}) (I_C=3A, I_B=60mA)$.
- High Collector Current.
: $I_C=5A, I_{CP}(\text{Peak Current})=8A$.
- Wide ASO.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	60	V
Collector-Emitter Voltage		V_{CEO}	20	V
Emitter-Base Voltage		V_{EBO}	6	V
Collector Current	DC	I_C	5	A
	Pulse (Note1)	I_{CP}	8	
Collector Power Dissi atio n		P_C	1	W
Junction Tem erature		T	150	°C
Storage Tem erature Range		T_{stg}	-55 ~ 150	°C

Note 1: Pulse Width $\leq 100\text{mS}$, Duty Cycle $\leq 30\%$

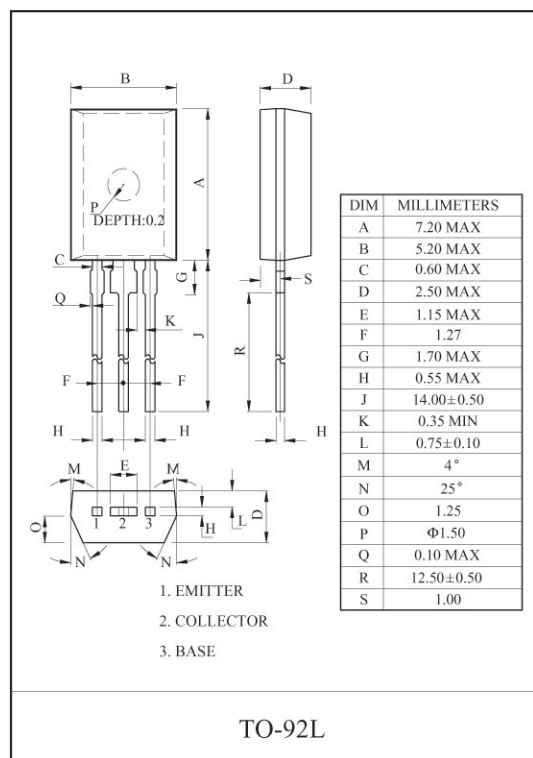

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-o Current	I_{CBO}	$V_{CB}=50V, I_E=0$	-	-	100	nA
Emitter Cut-o Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC Current Gain	$h_{FE(1)}$ (Note 1)	$V_{CE}=2V, I_C=0.5A$	140	-	600	
	$h_{FE(2)}$	$V_{CE}=2V, I_C=3A$ (Pulse)	75	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3A, I_B=60mA$ (Pulse)	-	-	0.5	V
Transition Fre uency	f_T	$V_{CE}=10V, I_C=50mA$	-	120	-	MH
Collector Out ut Ca acitance	C_o	$V_{CB}=10V, I_E=0, f=1MH$	-	27	-	F

Note 1 : $h_{FE(1)}$ Classification A:140 ~ 240, B:200 ~ 330, C:300 ~ 450, D:420 ~ 600

