


TV TUNER, UHF OSCILLATOR APPLICATION.  
(COMMON BASE)  
TV TUNER, UHF CONVERTER APPLICATION.  
(COMMON BASE)

#### FEATURES


- High Transition Frequency :  $f_T=1500\text{MHz}$  (Typ.).
- Excellent  $h_{FE}$  Linearity.

#### MAXIMUM RATING ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	30	V
Collector-Emitter Voltage	$V_{CEO}$	15	V
Emitter-Base Voltage	$V_{EBO}$	3	V
Base Current	$I_B$	25	mA
Collector Current	$I_C$	50	mA
Collector Power Dissipation	$P_C$	150	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	

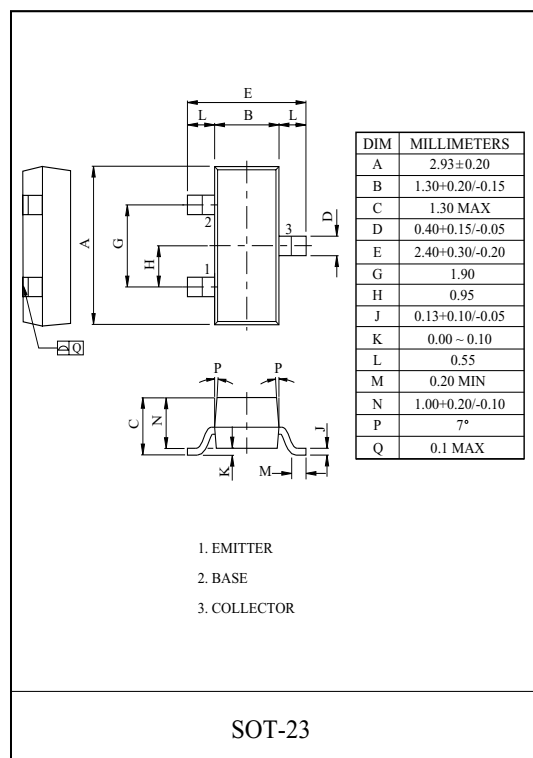


#### Marking

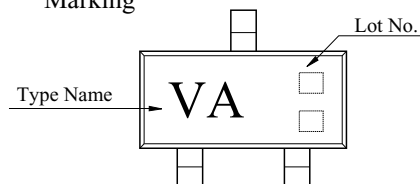


#### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=15\text{V}, I_E=0$	-	-	0.1	$\mu\text{A}$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=3\text{V}, I_C=0$	-	-	1.0	$\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}, I_B=0$	15	-	-	V
DC Current Gain	$h_{FE}$	$V_{CE}=3\text{V}, I_C=8\text{mA}$	60	150	320	
Transition Frequency	$f_T$	$V_{CE}=10\text{V}, I_C=8\text{mA}$	1100	1500	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}, I_E=0\text{mA}, f=1\text{MHz}$	-	0.9	1.3	pF
Collector-Base Time Constant	$C_C \cdot r_{bb}'$	$V_{CB}=10\text{V}, I_E=-8\text{mA}, f=30\text{MHz}$	-	7.0	12	pS


$f_T - I_C$

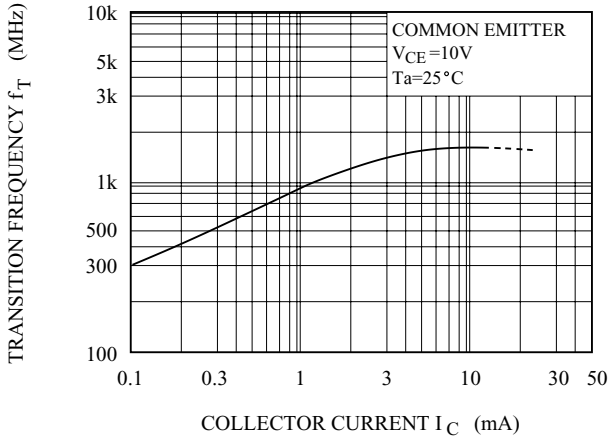


$y_{re} - f$

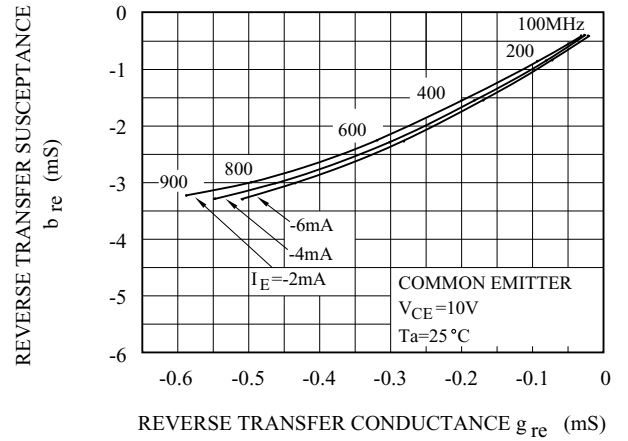


$y_{ie} - f$

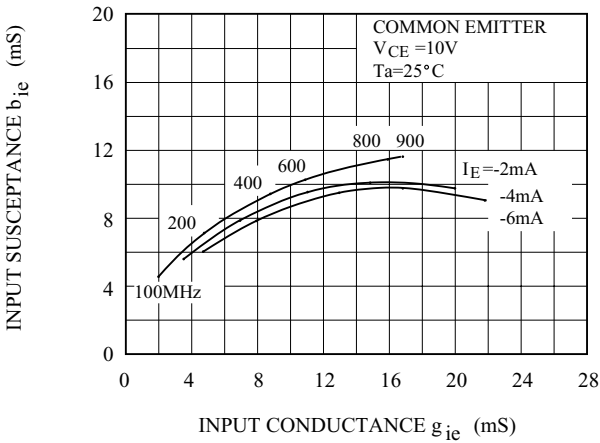

$y_{fe} - f$

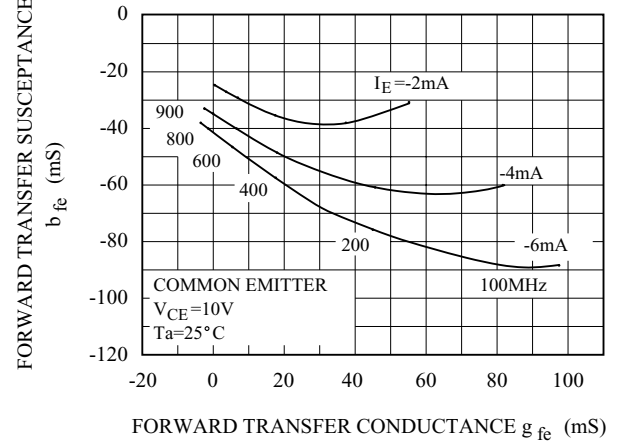

$y_{oe} - f$   
( $y_{ob} - f$ )

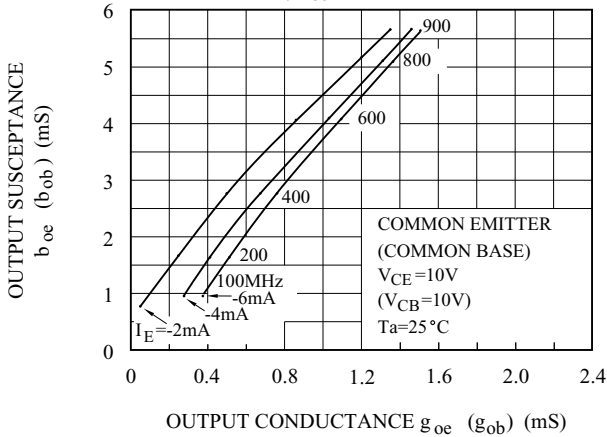

$y_{ib} - f$

