

# BCP53 Series, SBCP53 Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



## PNP Silicon Epitaxial Transistors

This PNP Silicon Epitaxial transistor is designed for use in audio amplifier applications. The device is housed in the SOT-223 package which is designed for medium power surface mount applications.

- High Current: 1.5 A
- NPN Complement is BCP56
- The SOT-223 Package can be soldered using wave or reflow. The formed leads absorb thermal stress during soldering, eliminating the possibility of damage to the die
- Device Marking:  
 BCP53T1 = AH  
 BCP53-10T1 = AH-10  
 BCP53-16T1 = AH-16
- AEC-Q101 Qualified and PPAP Capable
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS (T<sub>C</sub> = 25°C unless otherwise noted)

| Rating                                                                            | Symbol                            | Value          | Unit       |
|-----------------------------------------------------------------------------------|-----------------------------------|----------------|------------|
| Collector-Emitter Voltage                                                         | V <sub>CEO</sub>                  | -80            | Vdc        |
| Collector-Base Voltage                                                            | V <sub>CBO</sub>                  | -100           | Vdc        |
| Emitter-Base Voltage                                                              | V <sub>EBO</sub>                  | -5.0           | Vdc        |
| Collector Current                                                                 | I <sub>C</sub>                    | 1.5            | Adc        |
| Total Power Dissipation<br>@ T <sub>A</sub> = 25°C (Note 1.)<br>Derate above 25°C | P <sub>D</sub>                    | 1.5<br>12      | W<br>mW/°C |
| Operating and Storage<br>Temperature Range                                        | T <sub>J</sub> , T <sub>stg</sub> | -65 to<br>+150 | °C         |

### THERMAL CHARACTERISTICS

| Characteristic                                                              | Symbol           | Max       | Unit    |
|-----------------------------------------------------------------------------|------------------|-----------|---------|
| Thermal Resistance,<br>Junction to Ambient<br>(surface mounted)             | R <sub>θJA</sub> | 83.3      | °C/W    |
| Lead Temperature for Soldering,<br>0.0625" from case<br>Time in Solder Bath | T <sub>L</sub>   | 260<br>10 | °C<br>s |


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Device mounted on a glass epoxy printed circuit board 1.575 in. x 1.575 in. x 0.059 in.; mounting pad for the collector lead min. 0.93 sq. in.

**ON Semiconductor®**

<http://onsemi.com>


## MEDIUM POWER HIGH CURRENT SURFACE MOUNT PNP TRANSISTORS



### MARKING DIAGRAM



SOT-223  
CASE 318E  
STYLE 1



- A = Assembly Location
- Y = Year
- W = Work Week
- XXXXX = Specific Device Code
- = Pb-Free Package

(\*Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device       | Package              | Shipping†             |
|--------------|----------------------|-----------------------|
| BCP53T1G     | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| SBCP53-10T1G | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| BCP53-10T1G  | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| SBCP53-10T1G | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| BCP53-16T1G  | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| SBCP53-16T1G | SOT-223<br>(Pb-Free) | 1000 / Tape &<br>Reel |
| BCP53-16T3G  | SOT-223<br>(Pb-Free) | 4000 / Tape &<br>Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## BCP53 Series, SBCP53 Series

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristics | Symbol | Min | Typ | Max | Unit |
|-----------------|--------|-----|-----|-----|------|
|-----------------|--------|-----|-----|-----|------|

#### OFF CHARACTERISTICS

|                                                                                                     |               |      |   |      |                 |
|-----------------------------------------------------------------------------------------------------|---------------|------|---|------|-----------------|
| Collector-Base Breakdown Voltage ( $I_C = -100 \mu\text{Adc}$ , $I_E = 0$ )                         | $V_{(BR)CBO}$ | -100 | - | -    | Vdc             |
| Collector-Emitter Breakdown Voltage ( $I_C = -1.0 \text{ mAdc}$ , $I_B = 0$ )                       | $V_{(BR)CEO}$ | -80  | - | -    | Vdc             |
| Collector-Emitter Breakdown Voltage ( $I_C = -100 \mu\text{Adc}$ , $R_{BE} = 1.0 \text{ k}\Omega$ ) | $V_{(BR)CER}$ | -100 | - | -    | Vdc             |
| Emitter-Base Breakdown Voltage ( $I_E = -10 \mu\text{Adc}$ , $I_C = 0$ )                            | $V_{(BR)EBO}$ | -5.0 | - | -    | Vdc             |
| Collector-Base Cutoff Current ( $V_{CB} = -30 \text{ Vdc}$ , $I_E = 0$ )                            | $I_{CBO}$     | -    | - | -100 | nAdc            |
| Emitter-Base Cutoff Current ( $V_{EB} = -5.0 \text{ Vdc}$ , $I_C = 0$ )                             | $I_{EBO}$     | -    | - | -10  | $\mu\text{Adc}$ |

#### ON CHARACTERISTICS

|                                                                                                                                                                                                                                                                                                        |               |     |   |      |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----|---|------|-----|
| DC Current Gain ( $I_C = -5.0 \text{ mAdc}$ , $V_{CE} = -2.0 \text{ Vdc}$ ) All Part Types<br>( $I_C = -150 \text{ mAdc}$ , $V_{CE} = -2.0 \text{ Vdc}$ )<br>BCP53, SBCP53<br>BCP53-10, SBCP53-10<br>BCP53-16, SBCP53-16<br>( $I_C = -500 \text{ mAdc}$ , $V_{CE} = -2.0 \text{ Vdc}$ ) All Part Types | $h_{FE}$      | 25  | - | -    | -   |
|                                                                                                                                                                                                                                                                                                        |               | 40  | - | 250  | -   |
|                                                                                                                                                                                                                                                                                                        |               | 63  | - | 160  | -   |
|                                                                                                                                                                                                                                                                                                        |               | 100 | - | 250  | -   |
|                                                                                                                                                                                                                                                                                                        |               | 25  | - | -    | -   |
| Collector-Emitter Saturation Voltage ( $I_C = -500 \text{ mAdc}$ , $I_B = -50 \text{ mAdc}$ )                                                                                                                                                                                                          | $V_{CE(sat)}$ | -   | - | -0.5 | Vdc |
| Base-Emitter On Voltage ( $I_C = -500 \text{ mAdc}$ , $V_{CE} = -2.0 \text{ Vdc}$ )                                                                                                                                                                                                                    | $V_{BE(on)}$  | -   | - | -1.0 | Vdc |

#### DYNAMIC CHARACTERISTICS

|                                                                                                                       |       |   |    |   |     |
|-----------------------------------------------------------------------------------------------------------------------|-------|---|----|---|-----|
| Current-Gain - Bandwidth Product<br>( $I_C = -10 \text{ mAdc}$ , $V_{CE} = -5.0 \text{ Vdc}$ , $f = 35 \text{ MHz}$ ) | $f_T$ | - | 50 | - | MHz |
|-----------------------------------------------------------------------------------------------------------------------|-------|---|----|---|-----|

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# BCP53 Series, SBCP53 Series

## TYPICAL CHARACTERISTICS

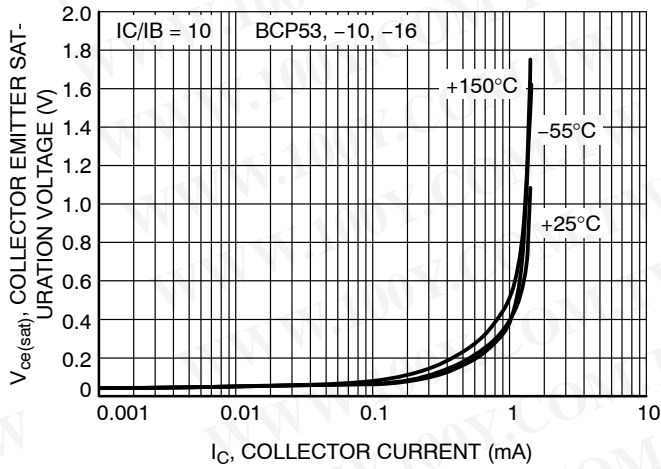


Figure 1. Collector Emitter Saturation Voltage vs. Collector Current

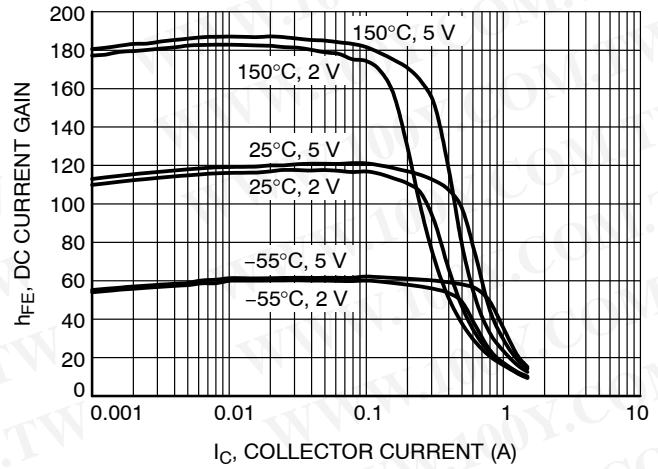


Figure 2. DC Current Gain vs. Collector Current (BCP53)

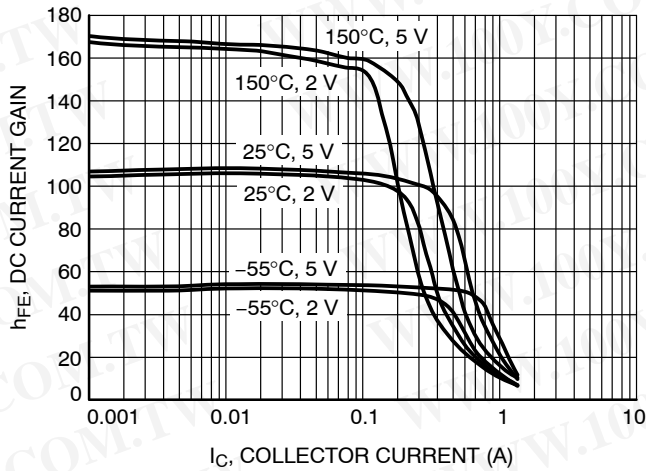


Figure 3. DC Current Gain vs. Collector Current (BCP53-10)

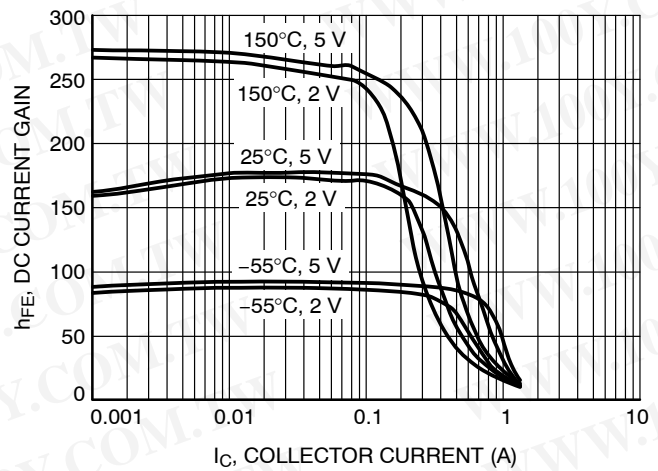


Figure 4. DC Current Gain vs. Collector Current (BCP53-16)

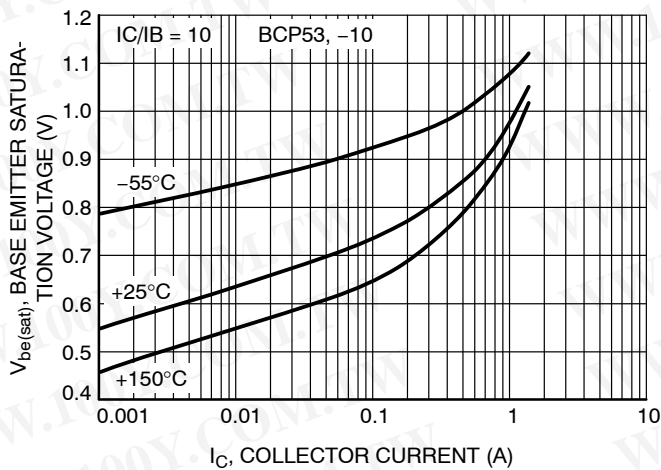


Figure 5. BCP53, -10 Base Emitter Saturation Voltage vs. Collector Current

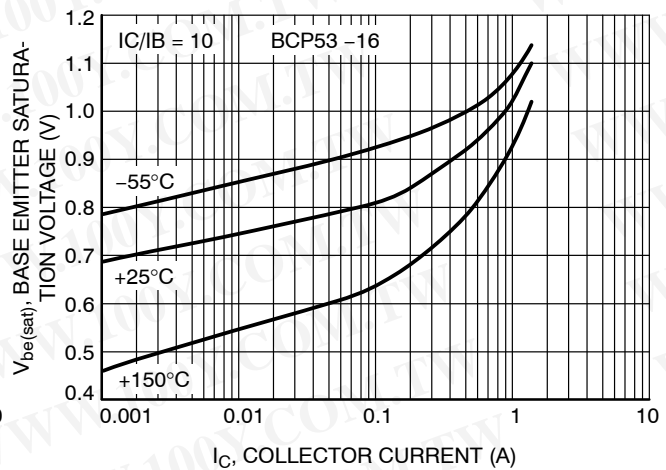


Figure 6. BCP53-16 Base Emitter Saturation Voltage vs. Collector Current

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# BCP53 Series, SBCP53 Series

## TYPICAL CHARACTERISTICS

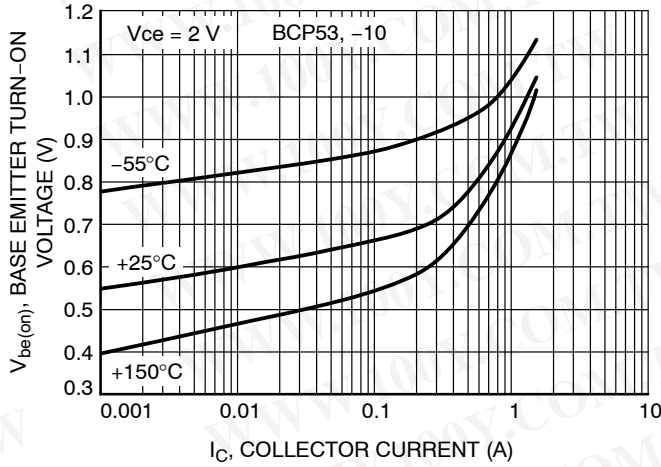


Figure 7. BCP53, -10 Base Emitter Turn-On Voltage vs. Collector Current  $V_{BE(on)}$

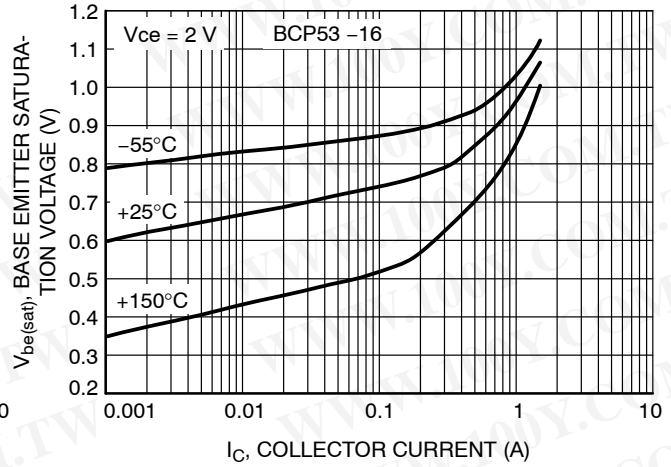


Figure 8. BCP53-16 Base Emitter Turn-On Voltage vs. Collector Current

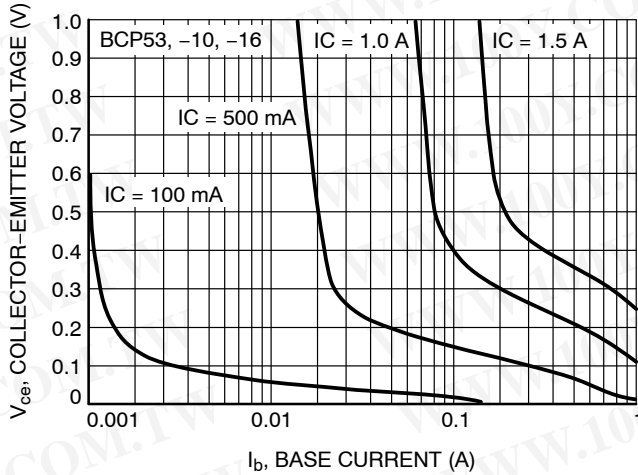


Figure 9. BCP53, -10, -16 Saturation Region

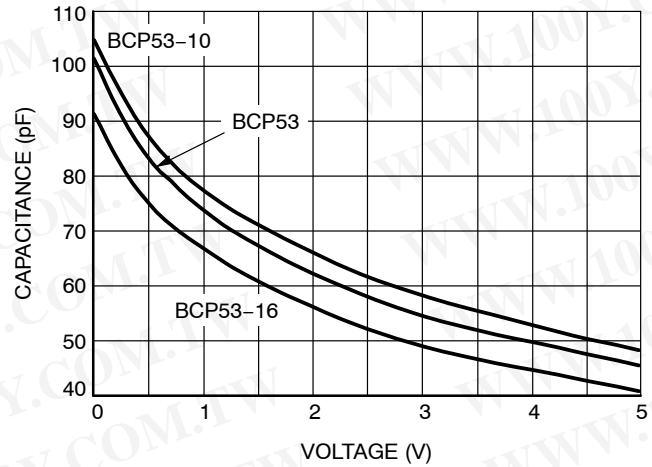


Figure 10. Input Capacitance

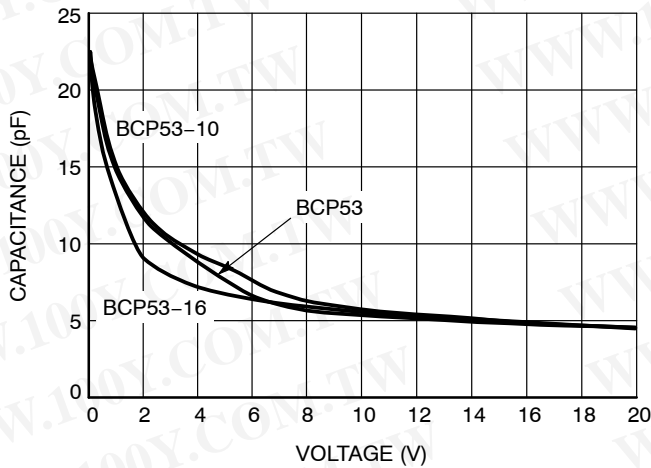


Figure 11. Output Capacitance

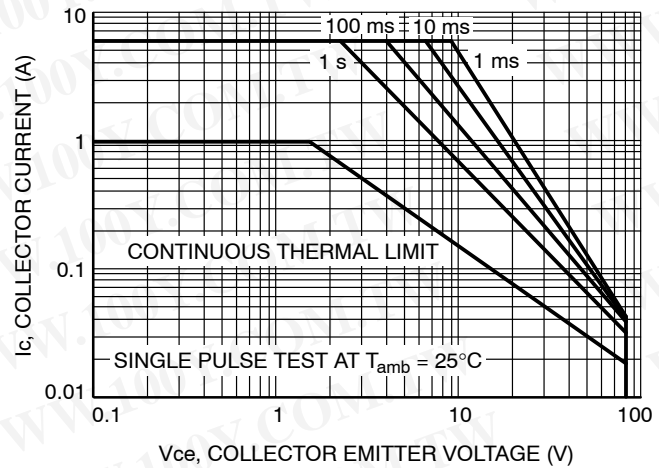


Figure 12. Standard Operating Area




# BCP53 Series, SBCP53 Series

## PACKAGE DIMENSIONS

SOT-223 (TO-261)  
CASE 318E-04  
ISSUE N

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

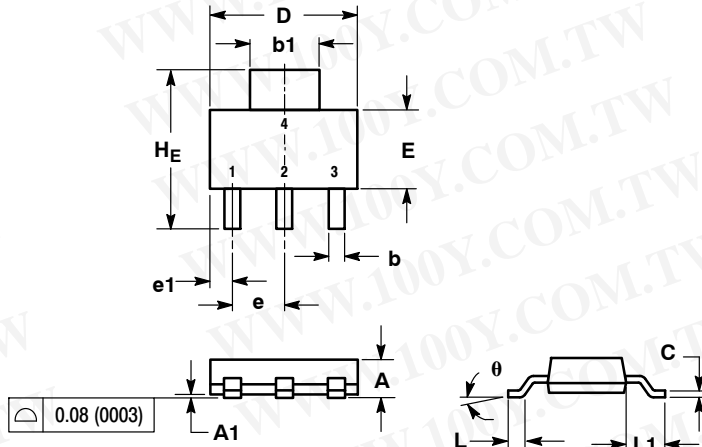


NOTES:  
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.  
2. CONTROLLING DIMENSION: INCH

| DIM      | MILLIMETERS |      |      | INCHES |       |       |
|----------|-------------|------|------|--------|-------|-------|
|          | MIN         | NOM  | MAX  | MIN    | NOM   | MAX   |
| A        | 1.50        | 1.63 | 1.75 | 0.060  | 0.064 | 0.068 |
| A1       | 0.02        | 0.06 | 0.10 | 0.001  | 0.002 | 0.004 |
| b        | 0.60        | 0.75 | 0.89 | 0.024  | 0.030 | 0.035 |
| b1       | 2.90        | 3.06 | 3.20 | 0.115  | 0.121 | 0.126 |
| c        | 0.24        | 0.29 | 0.35 | 0.009  | 0.012 | 0.014 |
| D        | 6.30        | 6.50 | 6.70 | 0.249  | 0.256 | 0.263 |
| E        | 3.30        | 3.50 | 3.70 | 0.130  | 0.138 | 0.145 |
| e        | 2.20        | 2.30 | 2.40 | 0.087  | 0.091 | 0.094 |
| e1       | 0.85        | 0.94 | 1.05 | 0.033  | 0.037 | 0.041 |
| L        | 0.20        | ---  | ---  | 0.008  | ---   | ---   |
| L1       | 1.50        | 1.75 | 2.00 | 0.060  | 0.069 | 0.078 |
| HE       | 6.70        | 7.00 | 7.30 | 0.264  | 0.276 | 0.287 |
| $\theta$ | 0°          | -    | 10°  | 0°     | -     | 10°   |

STYLE 1:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

### SOLDERING FOOTPRINT\*

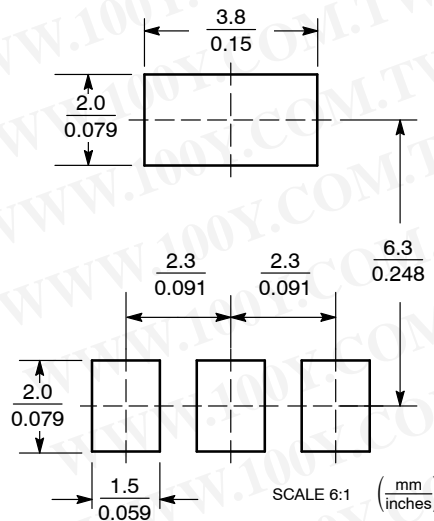

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)  
Order Literature: <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative