

**ADVANCED
POWER
TECHNOLOGY®**
APT2X100D30J 300V 100A
APT2X101D30J 300V 100A

DUAL DIE ISOTOP® PACKAGE

ULTRAFast SOFT RECOVERY DUAL RECTIFIER DIODES

PRODUCT APPLICATIONS	PRODUCT FEATURES	PRODUCT BENEFITS
<ul style="list-style-type: none"> • Anti-Parallel Diode <ul style="list-style-type: none"> -Switchmode Power Supply -Inverters • Free Wheeling Diode <ul style="list-style-type: none"> -Motor Controllers -Converters • Snubber Diode • Uninterruptible Power Supply (UPS) • Induction Heating • High Speed Rectifiers 	<ul style="list-style-type: none"> • Ultrafast Recovery Times • Soft Recovery Characteristics • Popular SOT-227 Package • Low Forward Voltage • High Blocking Voltage • Low Leakage Current 	<ul style="list-style-type: none"> • Low Losses • Low Noise Switching • Cooler Operation • Higher Reliability Systems • Increased System Power Density

MAXIMUM RATINGS

All Ratings are per diode: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT2X100/2X101D30J	UNIT
V_R	Maximum D.C. Reverse Voltage	300	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_F(AV)$	Maximum Average Forward Current ($T_C = 100^\circ\text{C}$, Duty Cycle = 0.5)	100	Amps
$I_F(RMS)$	RMS Forward Current	225	
I_{FSM}	Non-Repetitive Forward Surge Current ($T_J = 45^\circ\text{C}$, 8.3ms)	1000	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Lead Temperature: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
V_F	Maximum Forward Voltage			1.3	Volts
				$I_F = 100\text{A}$	
				$I_F = 200\text{A}$	
I_{RM}	Maximum Reverse Leakage Current			500	μA
				$V_R = V_R$ Rated	
				$V_R = V_R$ Rated, $T_J = 125^\circ\text{C}$	
C_T	Junction Capacitance, $V_R = 200\text{V}$		270		pF
L_S	Series Inductance (Lead to Lead 5mm from Base)		10		nH

APT Website - <http://www.advancedpower.com>

USA 405 S.W. Columbia Street Bend, Oregon 97702-1035 Phone: (541) 382-8028 FAX: (541) 388-0364
EUROPE Chemin de Magret F-33700 Merignac - France Phone: (33) 5 57 92 15 15 FAX: (33) 5 56 47 97 61

DYNAMIC CHARACTERISTICS


Symbol	Characteristic	MIN	TYP	MAX	UNIT
t_{rr1}	Reverse Recovery Time, $I_F = 1.0A$, $di_F/dt = -15A/\mu s$, $V_R = 30V$, $T_J = 25^\circ C$		65	TBD	ns
t_{rr2}	Reverse Recovery Time	$T_J = 25^\circ C$	68		
t_{rr3}	$I_F = 100A$, $di_F/dt = -800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	130		
t_{fr1}	Forward Recovery Time	$T_J = 25^\circ C$	208		
t_{fr2}	$I_F = 100A$, $di_F/dt = 800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	208		
I_{RRM1}	Reverse Recovery Current	$T_J = 25^\circ C$	24	32	Amps
I_{RRM2}	$I_F = 100A$, $di_F/dt = -800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	50	67	
Q_{rr1}	Recovery Charge	$T_J = 25^\circ C$	767		nC
Q_{rr2}	$I_F = 100A$, $di_F/dt = -800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	3305		
V_{fr1}	Forward Recovery Voltage	$T_J = 25^\circ C$	13.7		Volts
V_{fr2}	$I_F = 100A$, $di_F/dt = 800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	13.7		
diM/dt	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	1200		A/ μs
	$I_F = 100A$, $di_F/dt = -800A/\mu s$, $V_R = 180V$	$T_J = 100^\circ C$	845		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			0.42	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			20	
$V_{Isolation}$	RMS Voltage (50-60 Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.)	2500			Volts
W_T	Package Weight		1.03		oz
			29.2		gm
Torque	Maximum Torque (Mounting = 8-32 or 4mm Machine and Terminals = 4mm Machine)			13.6	lb•in
				1.5	N•m

APT Reserves the right to change, without notice, the specifications and information contained herein.

SOT-227 Package Outline

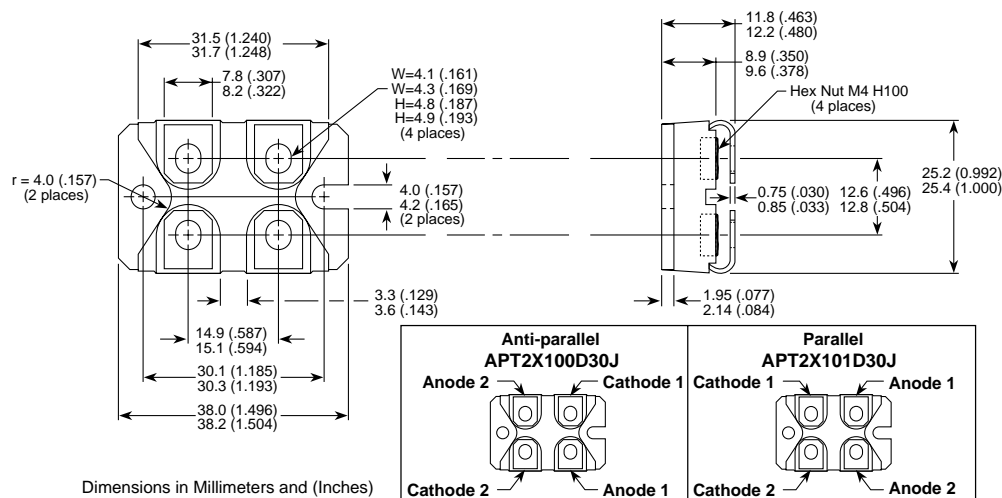

053-4057 Rev - 6-2002

APT's devices are covered by one or more of the following U.S.patents:
 ISOTOP® is a Registered Trademark of SGS Thomson.

4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336
 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058