


# 240 Amp Schottky Rectifier

## HS24230

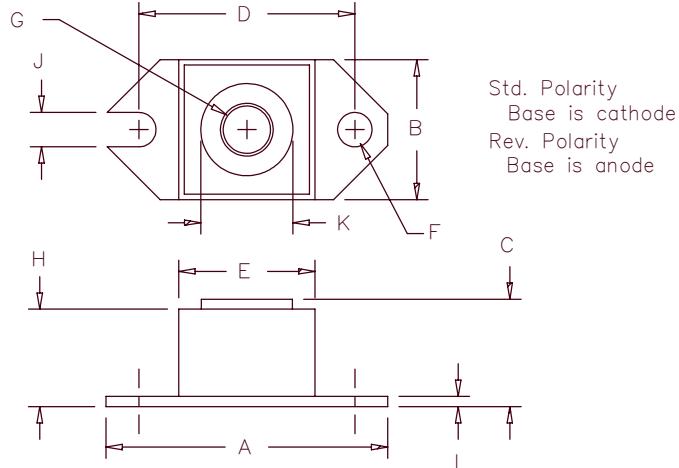

Microsemi Catalog Number	Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Reverse Voltage
HS24230*	242NQ030	30V	30V	30V

\*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 240 Amperes/30 Volts
- 150°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

### Electrical Characteristics

Average forward current	$I_{F(AV)}$ 240 Amps	$T_C = 84^\circ\text{C}$ , Square wave, $R_{\theta JC} = .24^\circ\text{C}/\text{W}$
Maximum surge current	$I_{FSM}$ 3500 Amps	8.3ms, half sine, $T_J = 150^\circ\text{C}$
Maximum repetitive reverse current	$I_{R(OV)}$ 2 Amps	$f = 1 \text{ KHZ}, 25^\circ\text{C}$
Max peak forward voltage	$V_{FM}$ 0.49 Volts	$ I_{FM} = 240\text{A}: T_J = 125^\circ\text{C}^*$
Max peak forward voltage	$V_{FM}$ 0.55 Volts	$ I_{FM} = 240\text{A}: T_J = 25^\circ\text{C}^*$
Max peak reverse current	$I_{RM}$ 3 Amp	$V_{RRM}, T_J = 125^\circ\text{C}^*$
Max peak reverse current	$I_{RM}$ 12mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance	$C_J$ 10500pF	$V_R = 5.0\text{V}, T_C = 25^\circ\text{C}$

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-55°C to 150°C
Operating junction temp range	$T_J$	-55°C to 150°C
Max thermal resistance	$R_{\theta JC}$	0.24°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.12°C/W Case to sink
Terminal Torque		35–40 inch pounds
Mounting Base Torque		20–25 inch pounds
Weight		1.1 ounces (32 grams) typical

# HS24230

Figure 1  
Typical Forward Characteristics

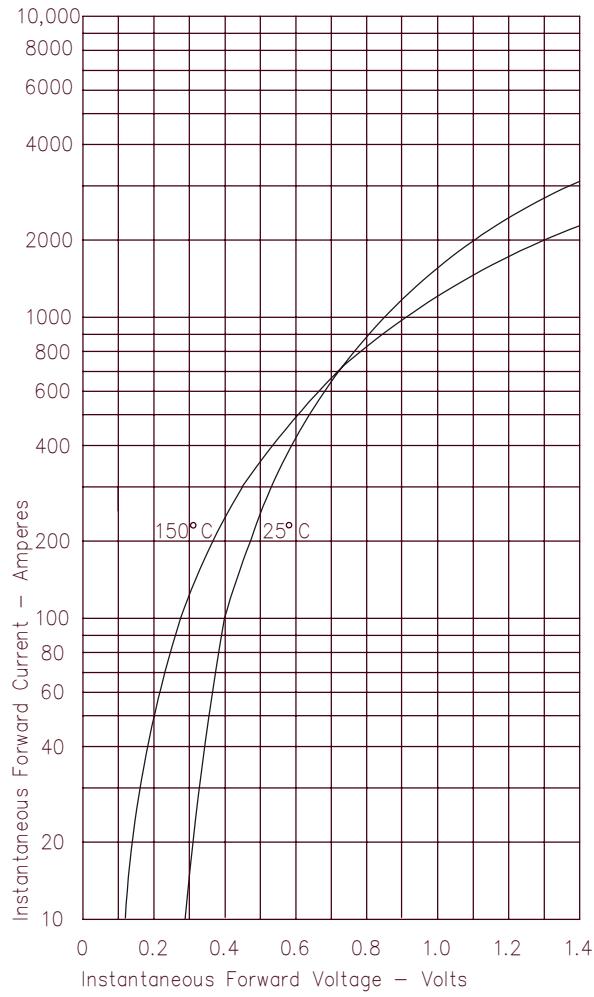


Figure 3  
Typical Junction Capacitance

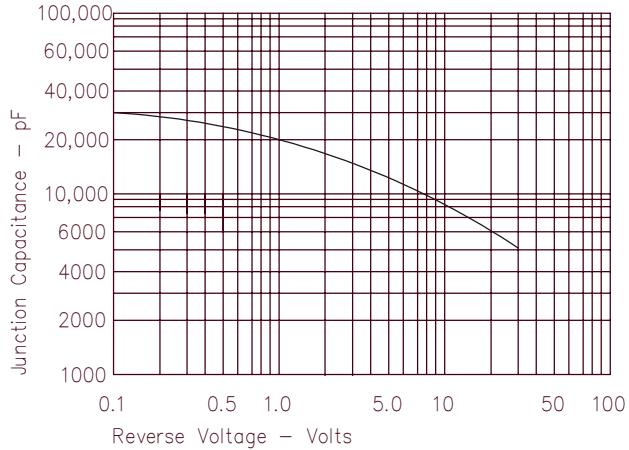


Figure 4  
Forward Current Derating

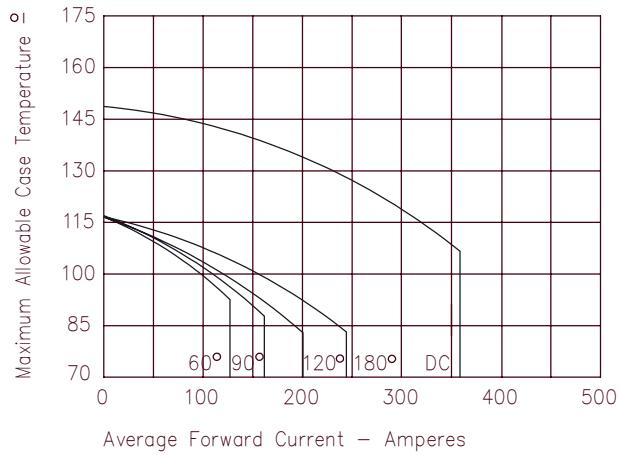


Figure 2  
Typical Reverse Characteristics

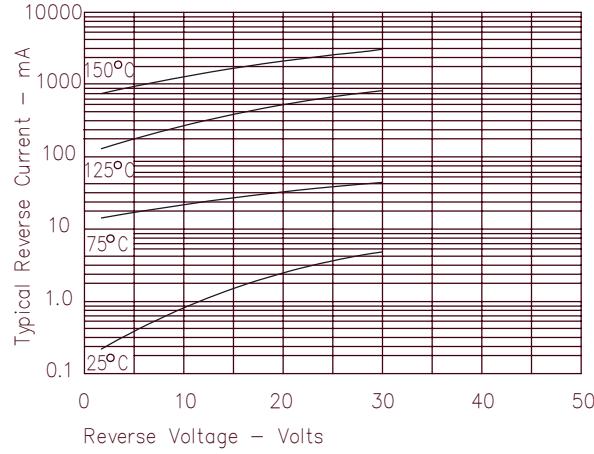


Figure 5  
Maximum Forward Power Dissipation

