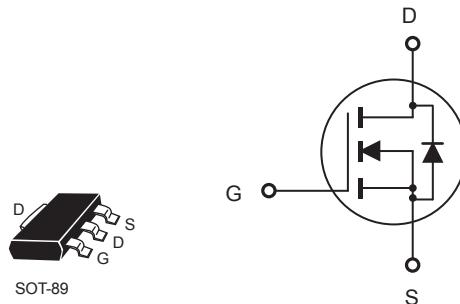


N-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

FEATURES


- 60V, 1.8A, $R_{DS(ON)} = 250\text{m}\Omega$ @ $V_{GS} = 10\text{V}$.
 $R_{DS(ON)} = 330\text{m}\Omega$ @ $V_{GS} = 4.5\text{V}$.
- High dense cell design for extremely low $R_{DS(ON)}$.
- Rugged and reliable.
- Lead free product is acquired.
- SOT-89 package.

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	1.8	A
Drain Current-Pulsed ^a	I_{DM}	7.2	A
Maximum Power Dissipation	P_D	1.3	W
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient ^b	$R_{\theta JA}$	100 \square	$^\circ\text{C/W}$



CEA6200

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 250\mu\text{A}$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 60\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
On Characteristics						
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{GS}} = V_{\text{DS}}, I_{\text{D}} = 250\mu\text{A}$	1		3	V
Static Drain-Source On-Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = 10\text{V}, I_{\text{D}} = 1.8\text{A}$		190	250	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_{\text{D}} = 1.4\text{A}$		250	330	$\text{m}\Omega$
Dynamic Characteristics^d						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		230		pF
Output Capacitance	C_{oss}			45		pF
Reverse Transfer Capacitance	C_{rss}			25		pF
Switching Characteristics^d						
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{DD}} = 27.5\text{V}, I_{\text{D}} = 1.8\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 3\Omega$		8	16	ns
Turn-On Rise Time	t_{r}			2.4	4.8	ns
Turn-Off Delay Time	$t_{\text{d(off)}}$			16.7	33.4	ns
Turn-Off Fall Time	t_{f}			1.6	3.2	ns
Total Gate Charge	Q_{g}	$V_{\text{DS}} = 27.5\text{V}, I_{\text{D}} = 1.8\text{A}, V_{\text{GS}} = 4.5\text{V}$		2.4	3.2	nC
Gate-Source Charge	Q_{gs}			0.8		nC
Gate-Drain Charge	Q_{gd}			1.1		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current ^b	I_{s}				1.8	A
Drain-Source Diode Forward Voltage ^c	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_{\text{s}} = 1.8\text{A}$			1.2	V

Notes :

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.
- b.Surface Mounted on FR4 Board, t ≤ 10 sec.
- c.Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
- d.Guaranteed by design, not subject to production testing.



CEA6200

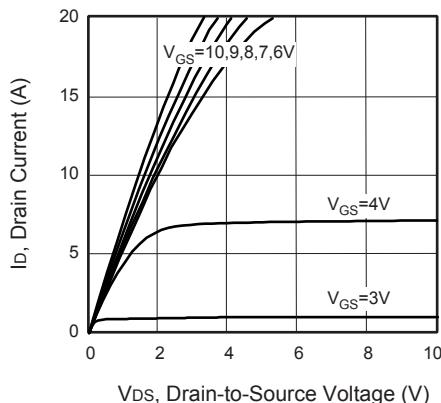


Figure 1. Output Characteristics

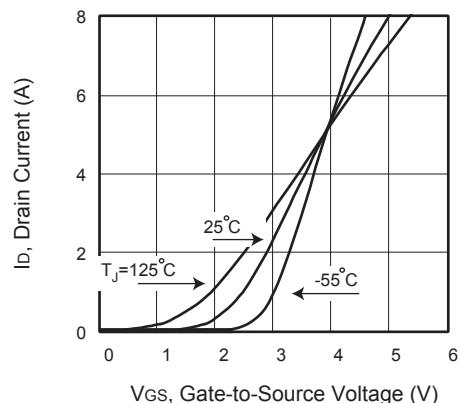


Figure 2. Transfer Characteristics

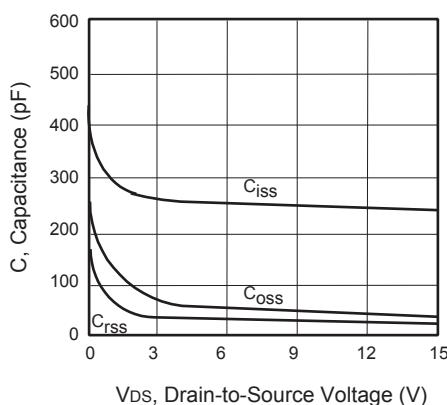


Figure 3. Capacitance

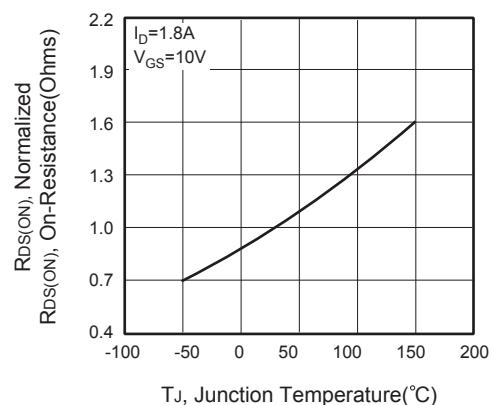


Figure 4. On-Resistance Variation with Temperature



Figure 5. Gate Threshold Variation with Temperature

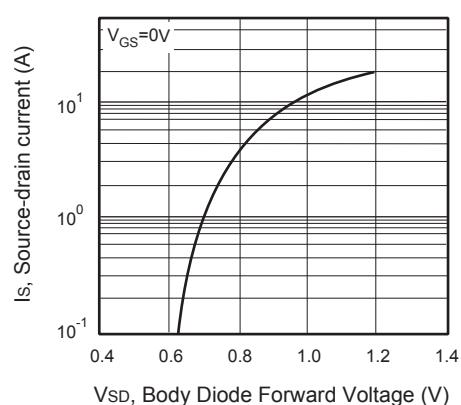


Figure 6. Body Diode Forward Voltage Variation with Source Current

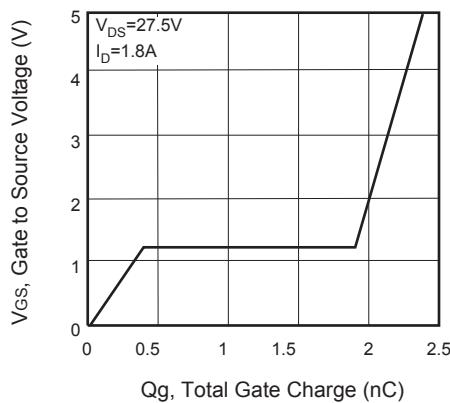


Figure 7. Gate Charge

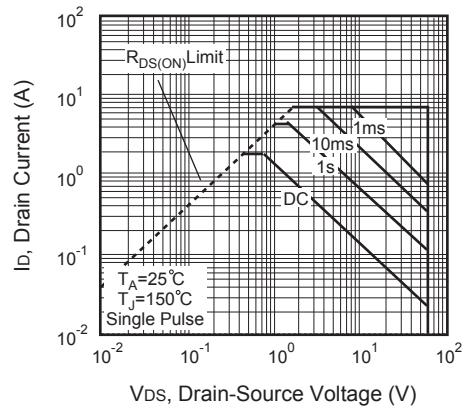


Figure 8. Maximum Safe Operating Area



Figure 9. Switching Test Circuit



Figure 10. Switching Waveforms

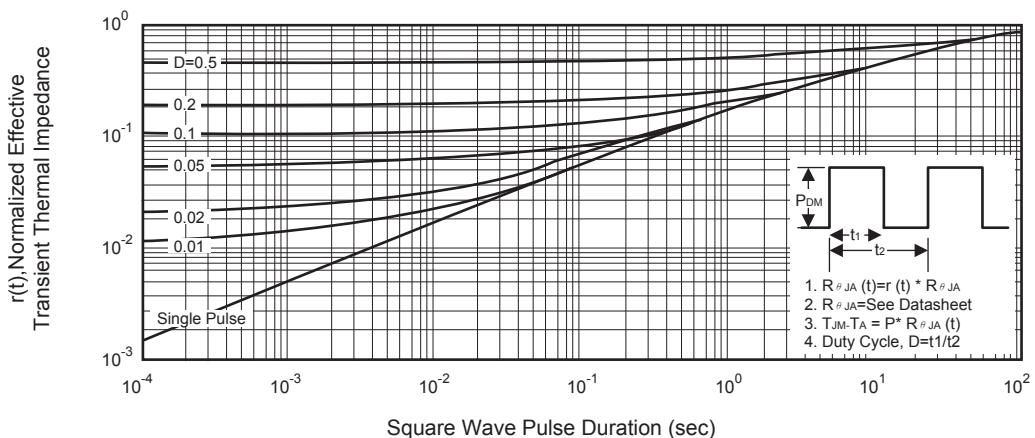


Figure 11. Normalized Thermal Transient Impedance Curve