


SWITCHING REGULATOR APPLICATIONS

Features

- High Voltage: $BV_{DSS}=60V$ (Min.)
- Low C_{rss} : $C_{rss}=84pF$ (Typ.)
- Low gate charge : $Q_g=26.7nC$ (Typ.)
- Low $R_{DS(on)}$: $R_{DS(on)}=22m\Omega$ (Max.)

Ordering Information

Type NO.	Marking	Package Code
STK5006P	STK5006	TO-220AB-3L

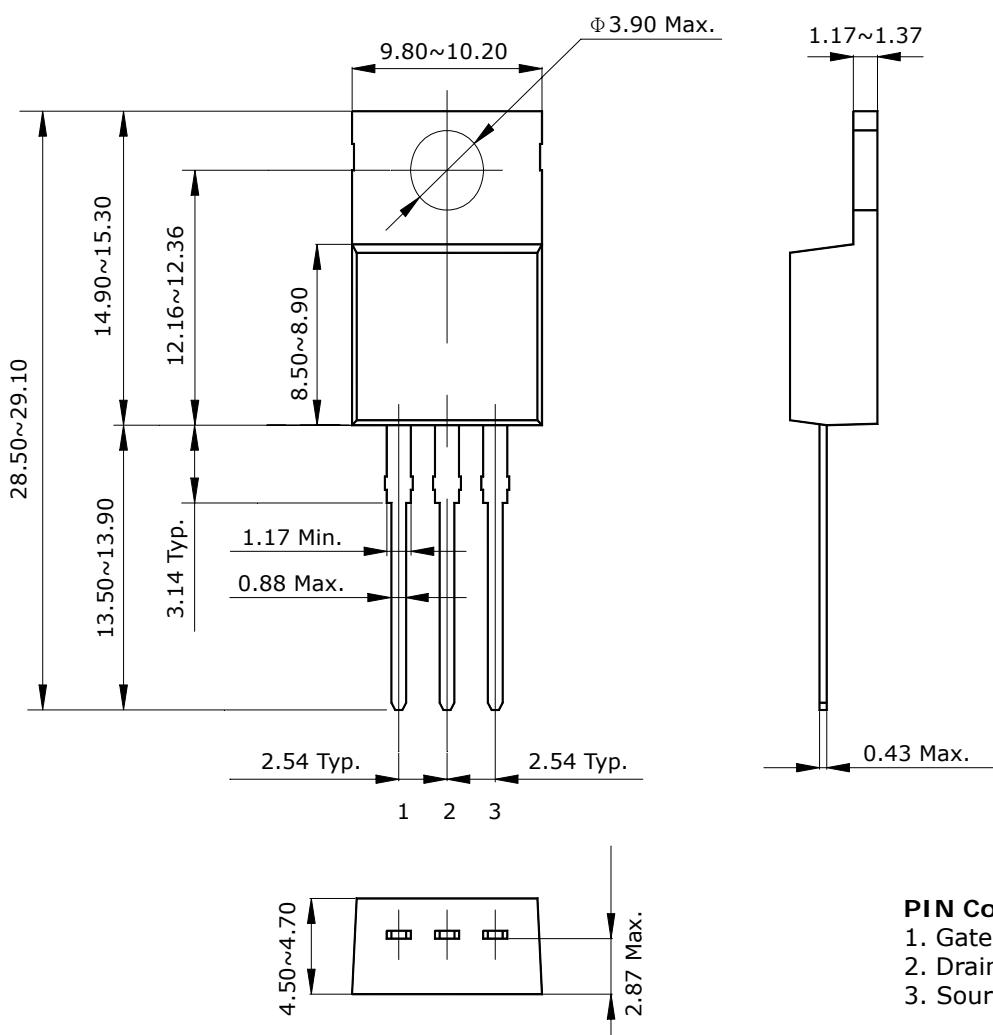Outline Dimensions
unit : mm


Absolute maximum ratings (Tc=25°C)

Characteristic	Symbol	Rating	Unit
Drain-Source voltage	V _{DSS}	60	V
Gate-Source voltage	V _{GSS}	±20	V
Continuous Drain current (Tc=25°C)	I _D	50	A
Continuous Drain current (Tc=100°C)	I _D	35.4	A
Drain Current-Pulsed ①	I _{DM}	200	A
Power Dissipation (Tc=25°C)	P _D	120	W
Single Pulsed Avalanche Energy ②	E _{AS}	490	mJ
Avalanche current ①	I _{AR}	50	A
Repetitive Avalanche Energy ①	E _{AR}	12	mJ
Junction temperature	T _J	150	°C
Storage temperature range	T _{stg}	-55~175	

Thermal Resistance

Characteristic	Symbol	Typ.	Max	Units
Junction to Case	R _{th(J-C)}	-	1.24	°C/W
Junction to Ambient	R _{th(J-a)}	-	62.5	

Electrical Characteristics (Tc=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-Source breakdown voltage	BV _{DSS}	I _D =250μA, V _{GS} =0	60	-	-	V
Gate-Threshold voltage	V _{GS(th)}	I _D =250μA, V _{DS} = V _{GS}	2.0	-	4.0	V
Drain-source leakage current	I _{DSS}	V _{DS} =60V, V _{GS} =0V	-	-	1	μA
Gate-source leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±20V	-	-	±100	nA
Drain-Source on-resistance ④	R _{DS(ON)}	V _{GS} =10V, I _D =25A	-	18	22	mΩ
Forward transfer admittance ④	g _{fs}	V _{DS} =25V, I _D =25A	-	22	-	S
Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =25V, f=1MHz	-	1289	1675	pF
Output capacitance	C _{oss}		-	445	580	
Reverse transfer capacitance	C _{rss}		-	84	110	
Turn-on delay time	t _{d(on)}	V _{DD} =30V, I _D =25A R _G =25Ω	-	15	40	ns
Rise time	t _r		-	105	220	
Turn-off delay time	t _{d(off)}		-	80	180	
Fall time	t _f		-	85	180	
Total gate charge	Q _g	V _{DS} =48V, V _{GS} =10V, I _D =50A	-	26.7	34	nC
Gate-source charge	Q _{gs}		-	5.0	-	
Gate-drain("Miller")charge	Q _{gd}		-	10.2	-	

Source-Drain Diode Ratings and Characteristics (Tc=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Units
Continuous source current	I _S	Integral reverse diode in the MOSFET	-	-	50	A
Pulsed-source current ①	I _{SM}		-	-	200	
Diode forward voltage ④	V _{SD}	V _{GS} =0V, I _S =50A	-	-	1.5	V
Reverse recovery time	t _{rr}	I _s =50A di _f /dt=100A/us	-	45	-	ns
Reverse recovery charge	Q _{rr}		-	70	-	uC

Note :

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ② L=230μH I_{AS}=50A, V_{DD}=25V, R_G=25Ω , starting T_j=25 °C
- ③ I_S ≤ 50A, di/dt≤ 300A/us, V_{DD}≤ BV_{DSS}, starting T_j=25 °C
- ④ Pulse Test : Pulse Width < 300us, Duty cycle≤ 2%
- ⑤ Essentially independent of operating temperature

Electrical Characteristic Curves

Fig. 1 I_D - V_{DS}

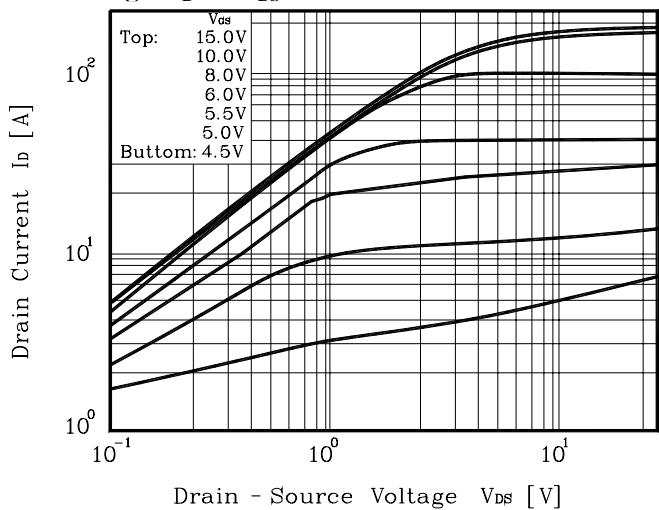


Fig. 2 I_D - V_{GS}

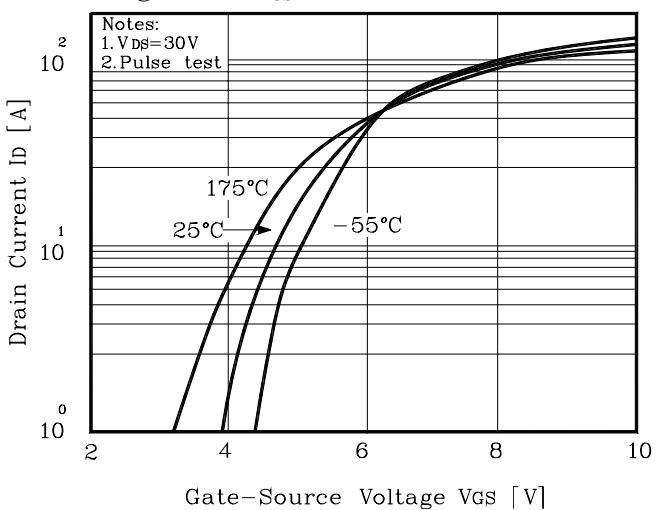


Fig. 3 $R_{DS(on)}$ - I_D

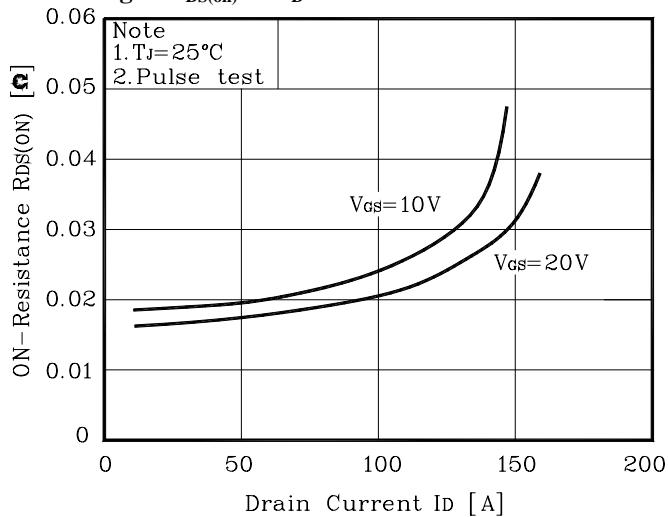


Fig. 4 I_S - V_{SD}

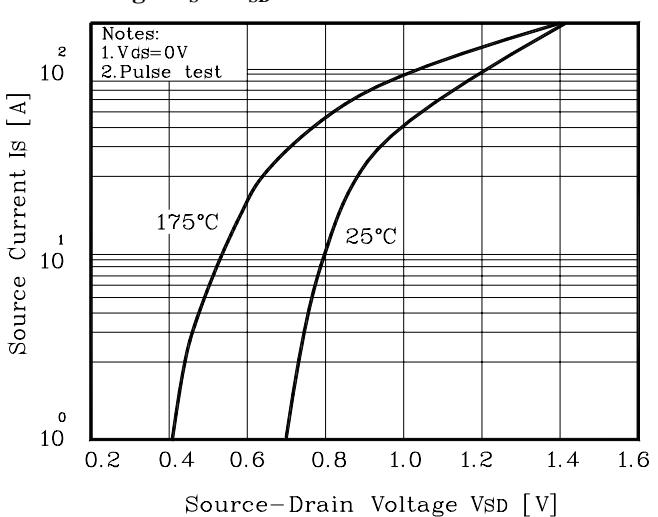


Fig. 5 Capacitance - V_{DS}

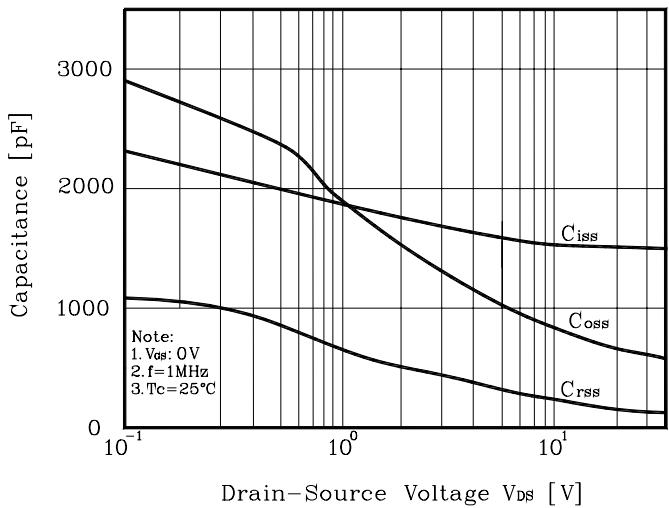


Fig. 6 V_{GS} - Q_G

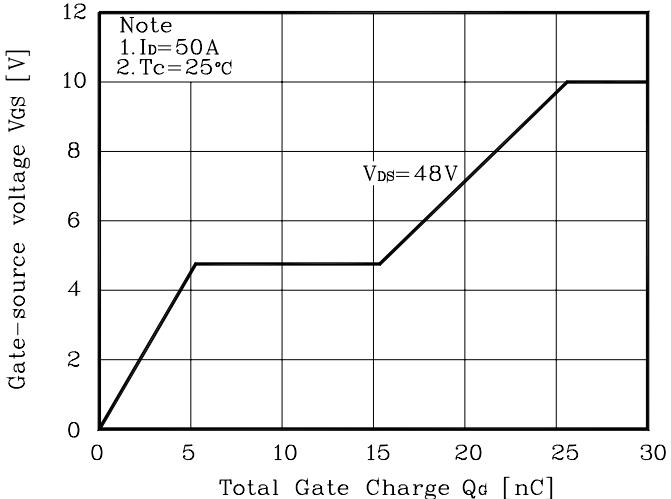


Fig. 7 V_{DSS} - T_J

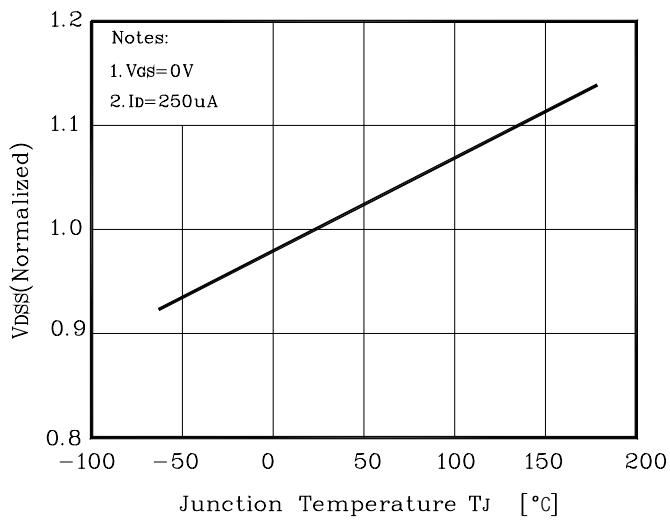


Fig.8 $R_{DS(on)}$ - T_J

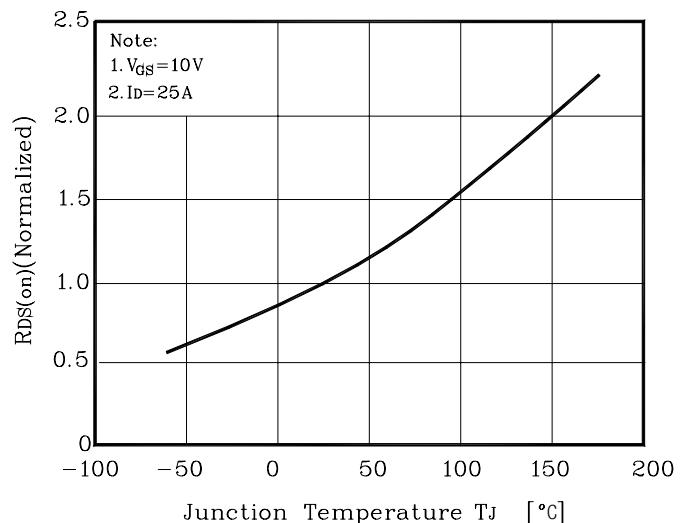


Fig. 9 I_D - T_C

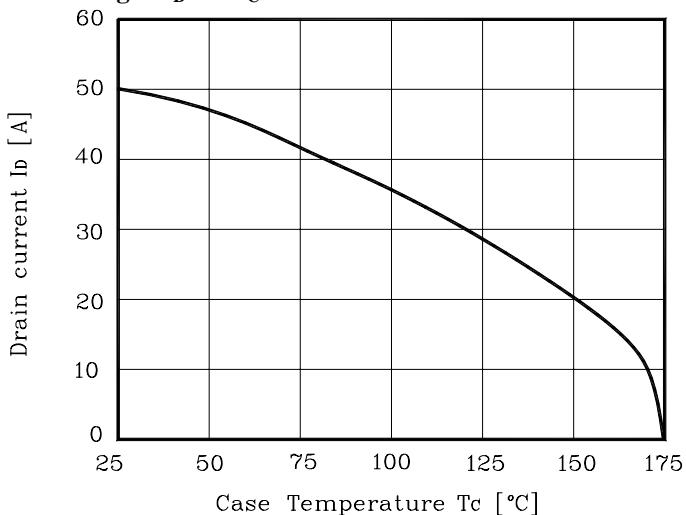


Fig. 10 Safe Operating Area

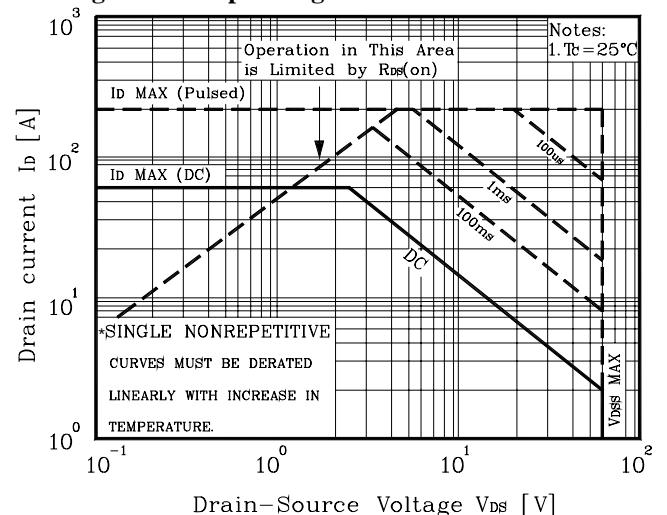


Fig. 10 Gate Charge Test Circuit & Waveform

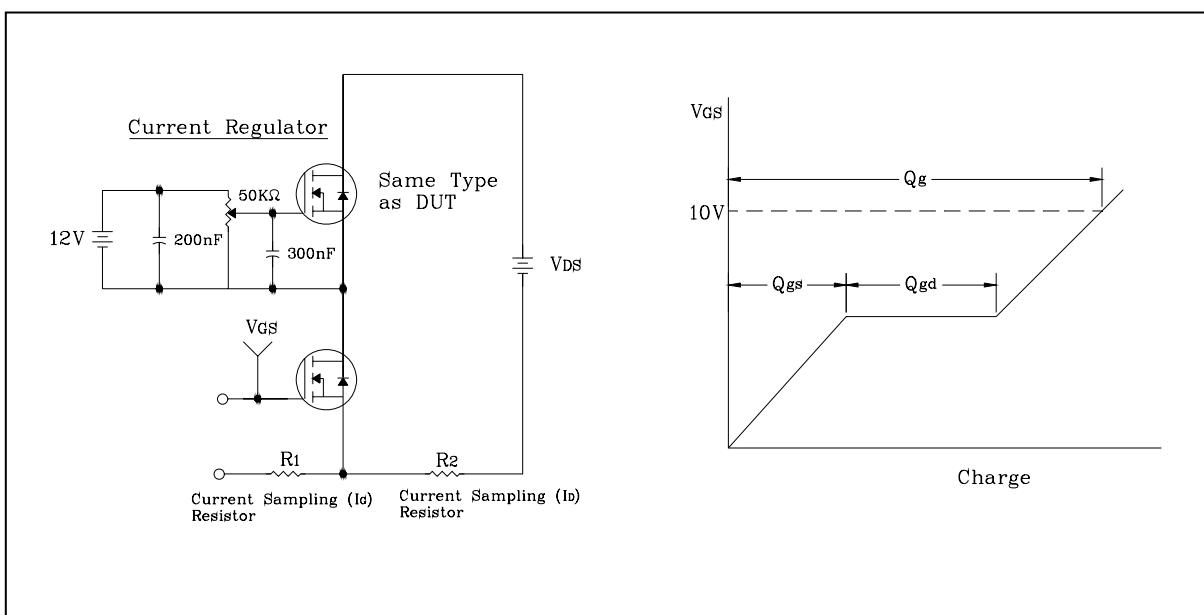


Fig. 11 Resistive Switching Test Circuit & Waveform

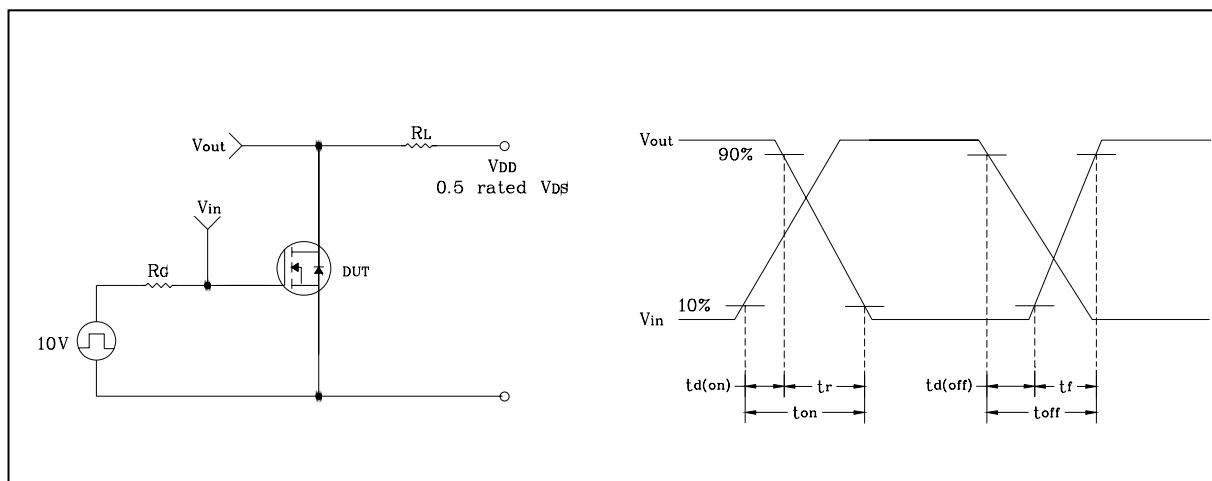


Fig. 12 E_{AS} Test Circuit & Waveform





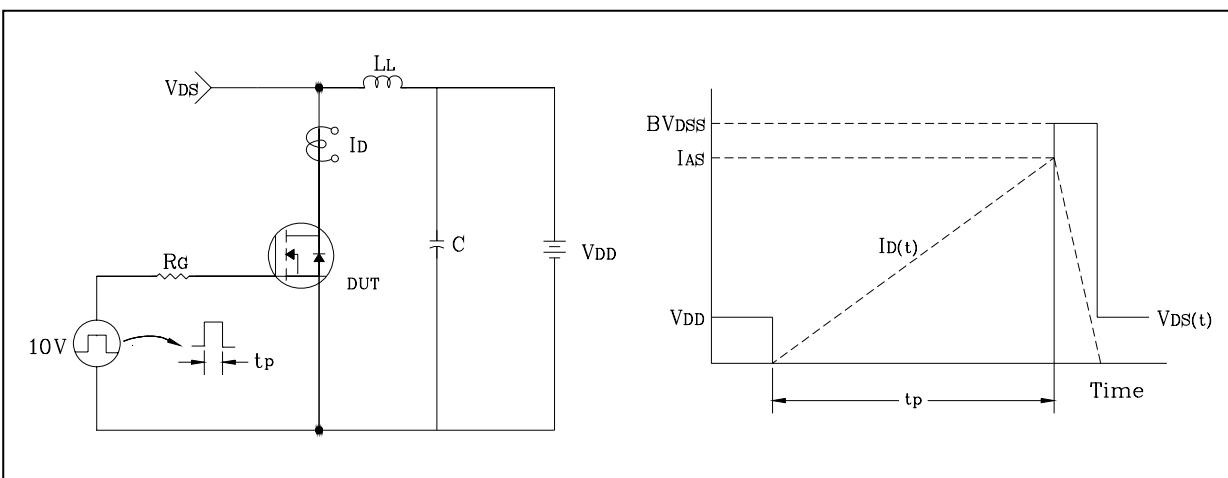


Fig. 13 Diode Reverse Recovery Time Test Circuit & Waveform

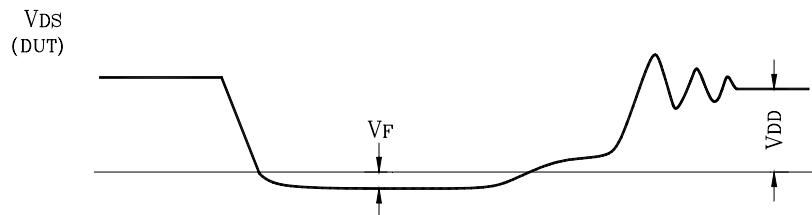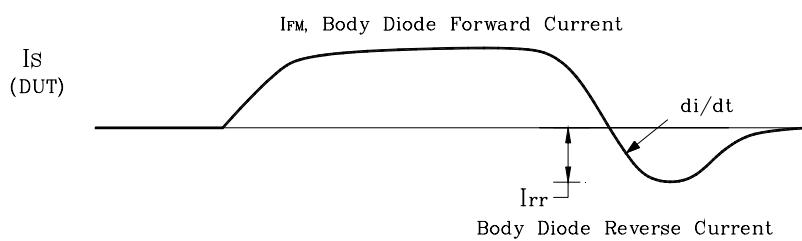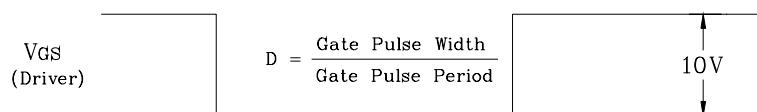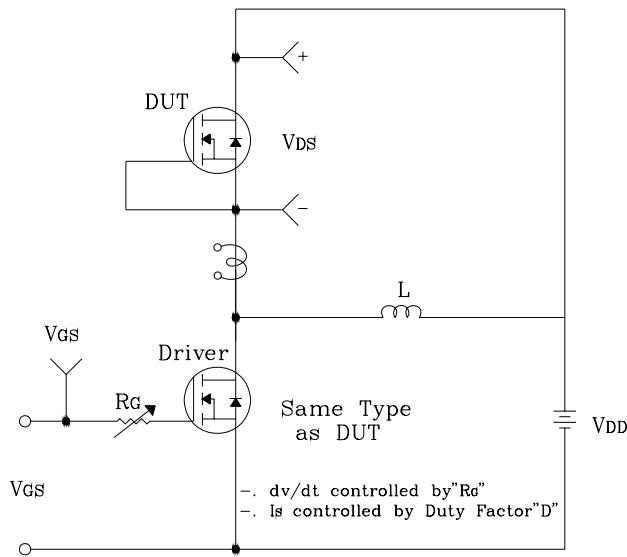

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.