

Surface Mount Schottky Barrier Rectifier

FEATURES

- Ideal for automated placement
- Low forward voltage drop
- Low leakage current
- Meets environmental standard MIL-S-19500D
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 275 °C, 10 s
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



DO-214AC (SMA)

TYPICAL APPLICATIONS

For use in general purpose rectification of lighting, power supplies, inverters, converters and freewheeling diodes for consumer, automotive and telecommunication.

PRIMARY CHARACTERISTICS	
IF(AV)	2 A
VRRM	20 V to 100 V
IFSM	45A
VF	0.42V , 0.47V , 0.72V
TJ max.	125 °C , 150 °C

MECHANICAL DATA

Case: DO-214AC, molded epoxy body , Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22B-106

Polarity: Laser Band Denotes Cathode Band

MAXIMUM RATINGS (TA = 25 °C unless otherwise noted)											
PARAMETER	SYMBOL	SL22A	SL23A	SL24A	SL25A	SL26A	SL27A	SL28A	SL29A	SL210 A	UNIT
Maximum repetitive peak reverse voltage	VRRM	20	30	40	50	60	70	80	90	100	V
Maximum RMS voltage	VRMS	14	21	28	35	42	49	56	63	70	V
Maximum DC blocking voltage	VDC	20	30	40	50	60	70	80	90	100	V
Maximum average forward rectified current at TL (See Fig.1)	IF(AV)	2									A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	45									A
Operating junction temperature range	TJ	- 55 to + 125				- 55 to + 150					°C
Storage temperature range	Tstg	- 55 to + 150									°C



SL22A thru SL210A

ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)												
PARAMETER	TEST CONDITIONS	SYMBOL	SL22A	SL23A	SL24A	SL25A	SL26A	SL27A	SL28A	SL29A	SL210A	UNIT
Maximum instantaneous forward voltage	IF=2 A	V _F	0.42			0.47		0.72				V
Maximum DC reverse current at rated DC blocking voltage	T _A =25	I _R	0.2			0.15						mA
	T _A =100		10			TBD						
Typical junction capacitance	4.0 V, 1 MHz	C _J	175									pF

THERMAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)											
PARAMETER	SYMBOL	SL22A	SL23A	SL24A	SL25A	SL26A	SL27A	SL28A	SL29A	SL210A	UNIT
Maximum thermal resistance	R _{θJA} (1)	TBD									°C/W
	R _{θJT} (2)	TBD									

Notes: (1) Thermal resistance from junction to ambient, 0.197 × 0.197" (5.0 × 5.0mm) copper pads to each terminal
 (2) Thermal resistance from junction to terminal, 0.197 × 0.197" (5.0 × 5.0mm) copper pads to each terminal

RATINGS AND CHARACTERISTICS CURVES (T_A = 25 °C unless otherwise noted)

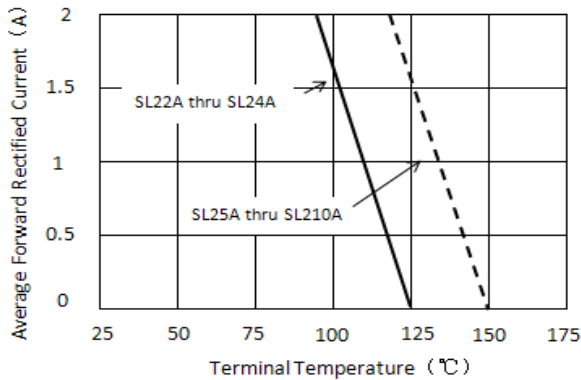


Figure 1. Forward Current Derating Curve

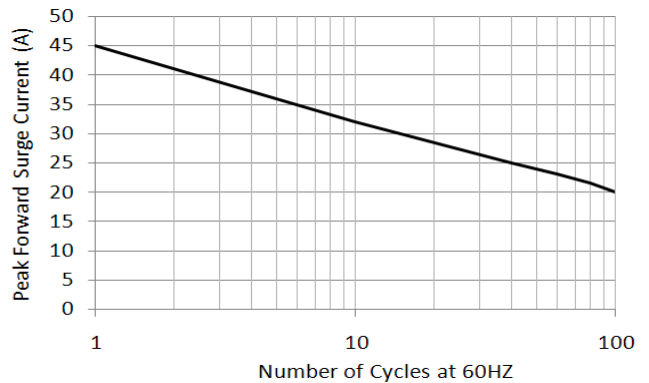


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

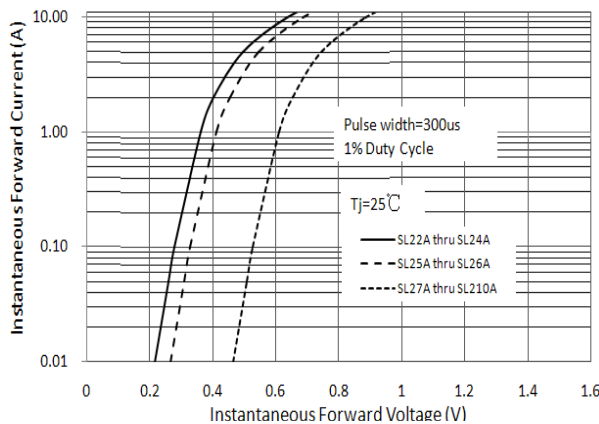


Figure 3. Typical Instantaneous Forward Characteristics

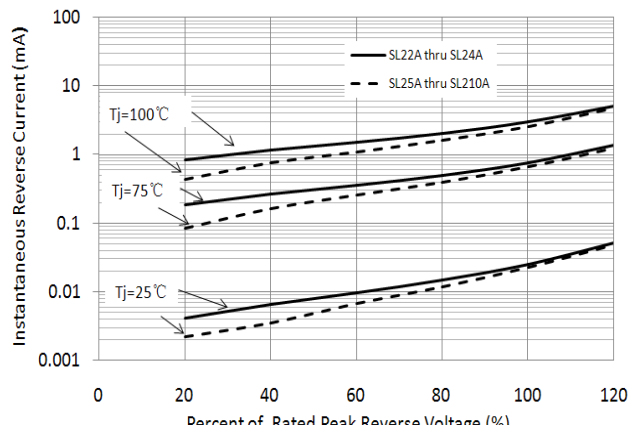


Figure 4. Typical Reverse Characteristics

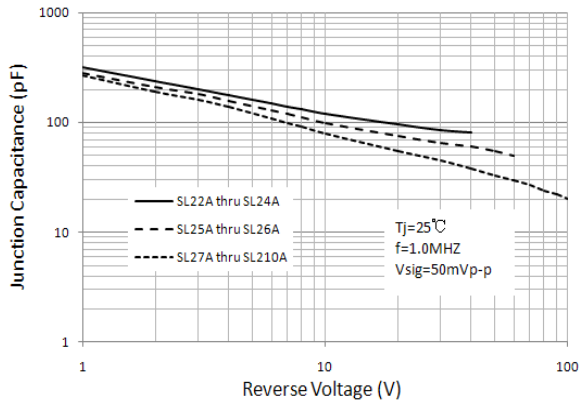


Figure 5. Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

