

Product Specification

GOODARK Type (POWER QFN Diode)

MBRP1045

Construction : Schottky Barrier Rectifier

Application : For General Purpose


(Manufacturer) :

Suzhou Goodark Electronics Co.,Ltd

Prepared on May. 10th, 2012

Prepared: R & D Department

Approval: QRA Department

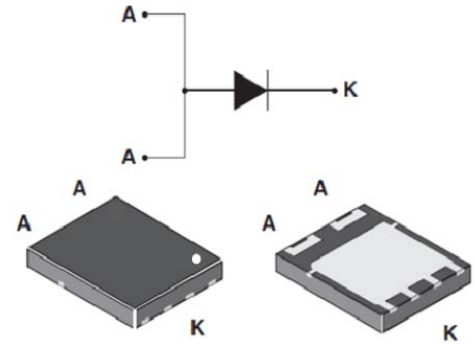

SCHOTTKY BARRIER RECTIFIER

10 AMPERES

45 VOLTS

0.47V (10A Type)/ Low Vf Schottky


Thin Package: 1.0mm

Halogen Free Package

CONTENTS

1. Package Outline
2. Marking
3. Features& Mechanical Characteristics
4. Maximum Ratings and Electrical Characteristics
5. Rating and characteristic Curves
6. Packing Specification PACKAGING SPECIFICATION
7. Description of Box Label

1. Package Outline (POWER QFN5X6)

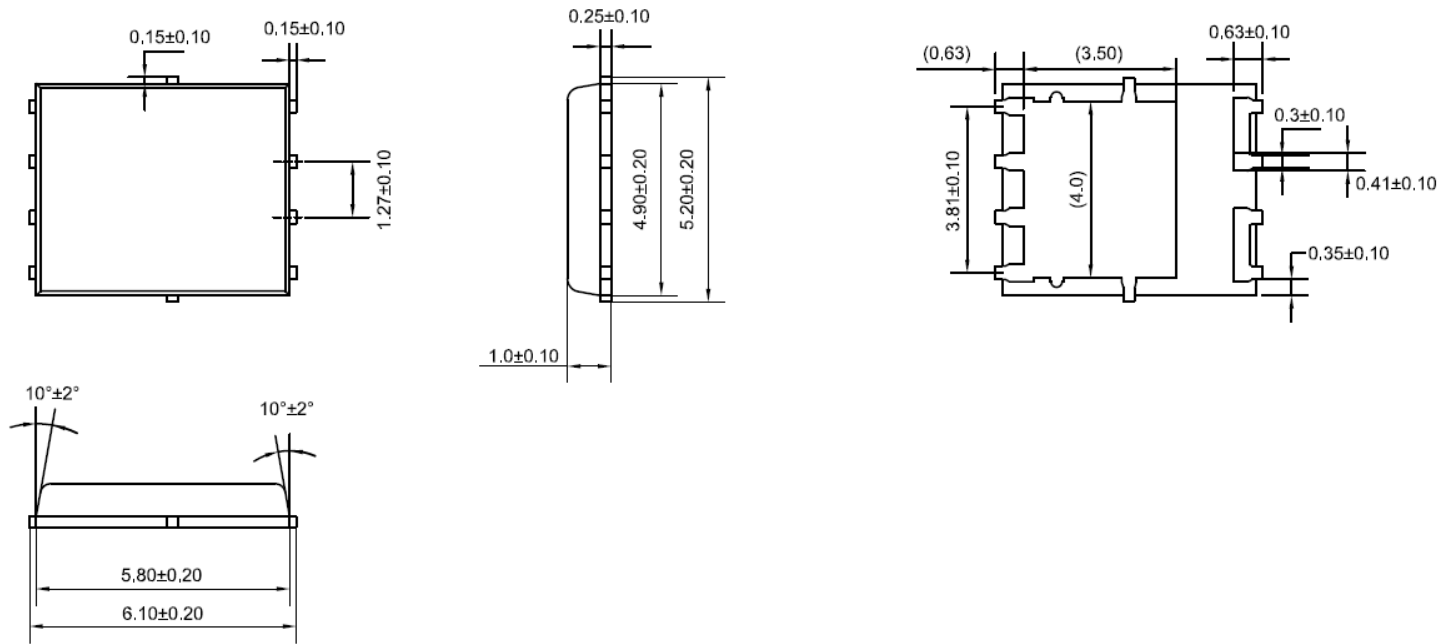

2. MARKING



1. Part Name : MBRP1045

2. Logo Mark: 

3. Polarity: 



3.Features& Mechanical Characteristics

Features

- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- For surface mounted application
- Metal of silicon rectifier, majority carrier conduction
- Low forward voltage, high efficiency
- Guarding for over voltage protection
- For use in low voltage, high frequency inverters,
- Free wheeling, and polarity protection applications

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.1grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Shipped tape reel packing 3000/reel

4.Maximum Ratings and Electrical Characteristics

MAXIMUM RATINGS and ELECTRICAL CHARACTERISTICS(TC=25°C unless otherwise noted)					
PARAMETER	TEST CONDITIONS		SYMBOL	MBRP1045	UNIT
Maximum repetitive peak reverse voltage			VRRM	45	V
Working peak reverse voltage			VRWM	45	V
Maximum DC blocking voltage			VDC	45	V
Maximum average forward rectified current at Tc=105°C total device per diode			IF(AV)	10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode			IFSM	200	A
Peak repetitive reverse current per leg at tp=2.0us , 1KHz			Irrm	1.0	A
Voltage rate of change (rated VR)			DV/dt	10000	V/us
Operating junction temperature range			TJ	-55 to+150	°C
Storage temperature range			TSTG	-55 to+150	°C
Maximum instantaneous forward voltage per leg	IF=10A	TC=25°C	VF	0.49	V
Maximum reverse current per leg at working peak Reverse voltage		TC=25°C	IR	300	uA

Thermal Characteristics Ta=25°C unless otherwise noted

Symbol	Parameter	Type Value	Unit
RθJC	Thermal Resistance, Junction to Case per Leg	2.5	°C /W
RθJA	Thermal Resistance, Junction to Ambient per Leg	50	°C /W

Note:

1. Pulse test:300us pulse width, duty cycle=2%

5. Rating and Characteristic Curves

($T_c=25^\circ\text{C}$ Unless otherwise noted)

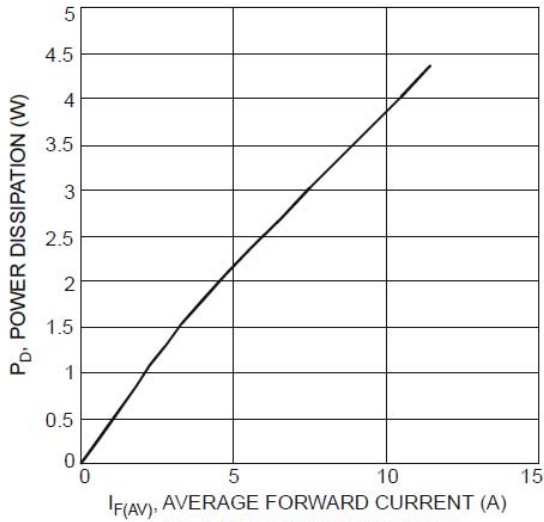


Fig. 1 Forward Power Dissipation

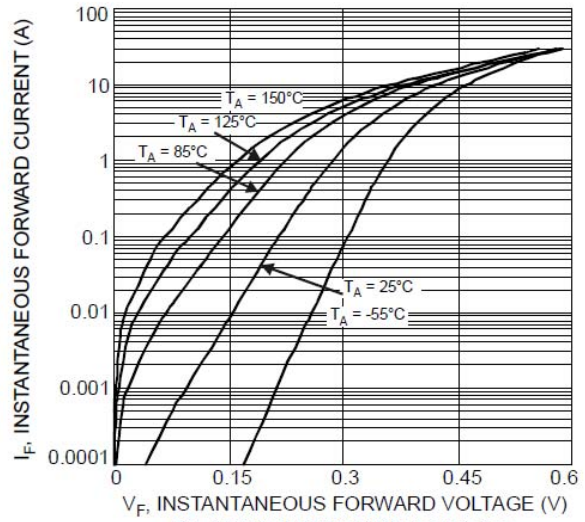


Fig. 2 Typical Forward Characteristics

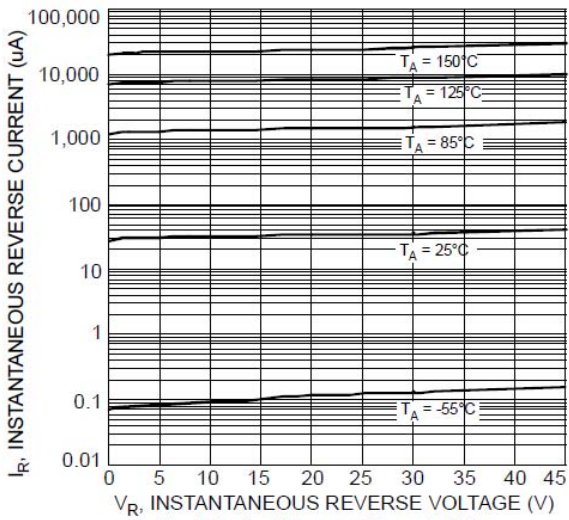


Fig. 3 Typical Reverse Characteristics

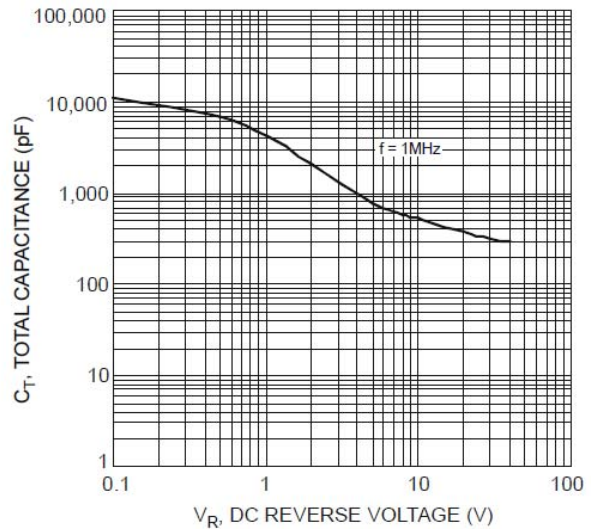



Fig. 4 Total Capacitance vs. Reverse Voltage

6. Packing Specification

Tape&reel packing



Packing size:3000 /reel(13' reel)

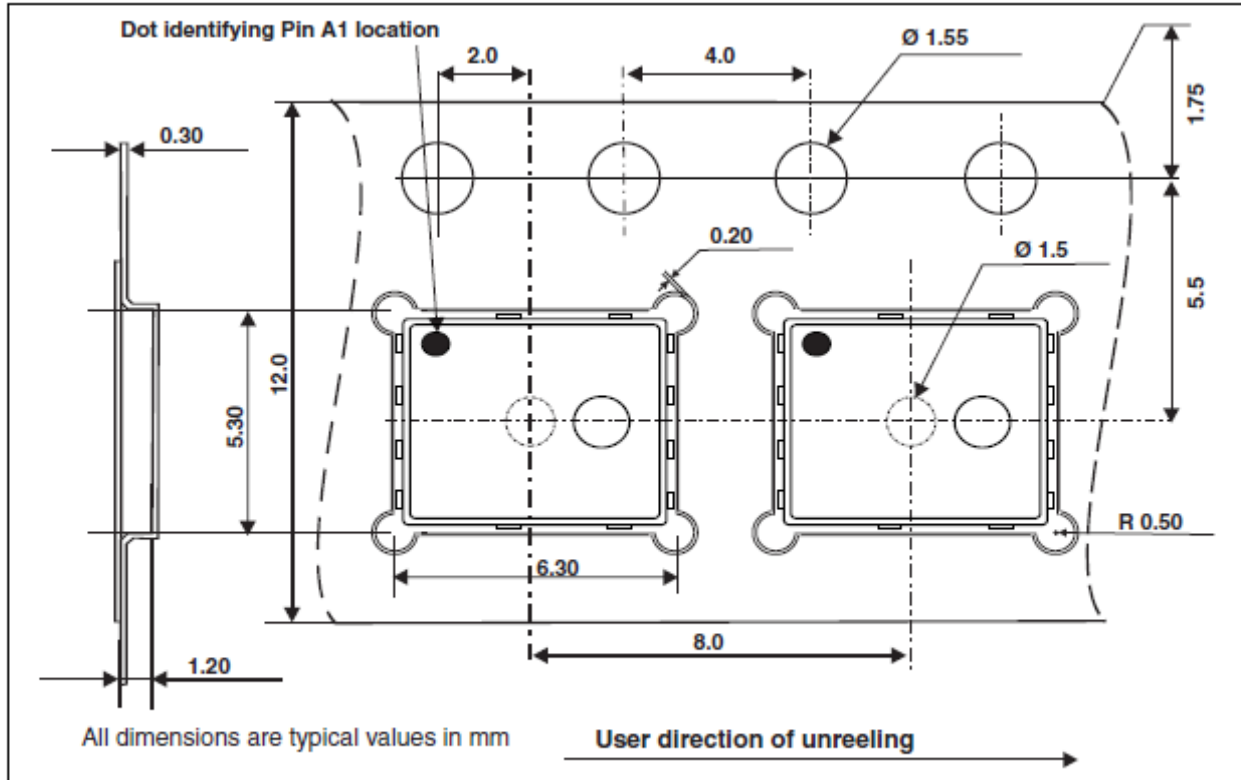Figure 12. Tape and reel specifications





7. DESCRIPTION of BOX LABEL

	<p>TYPE: Q'TY: P/O NO: LOT NO:</p>
1) Inner Box Label	2) Inner Box Label
	<p>TYPE: Q'TY: P/O NO:</p>
3) Outer Box Label	4) Outer Box Label