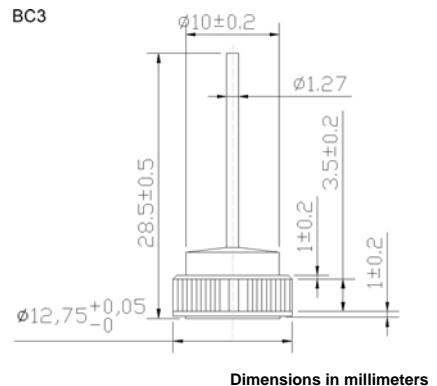



**Technical Specification:**
**Features:**

- ◆ High power capability
- ◆ Economical
- ◆ Avalanche Voltage: 24V to 32V

**Mechanical Data:**

- ◆ Case: Copper case
- ◆ Epoxy: UL94-0 rate flame retardant
- ◆ Chip: Glass passivated chip or oj chip
- ◆ Polarity: As marked of case bottom
- ◆ Technology vacuum soldered
- ◆ Lead: Plated lead, solderable per MIL-STD-202E method 208C
- ◆ Weight: 0.229 ounces 6.48 grams


**■Maximum Ratings and Electrical Characteristics**

- ◆ Rating at 25°C ambient temperature unless otherwise specified.
- ◆ Single phase, half wave, 60Hz, resistive or inductive load.
- ◆ For capacitive load derate current by 20%.

Electrical Characteristics @ 25°C	Symbols	Min.	Nominal	Max.	Units
Peak repetitive reverse voltage	$V_{RRM}$		20		
Working peak reverse voltage	$V_{WRM}$		20		
DC blocking voltage	$V_{DC}$		20		
Average rectified forward current at $T_c=125^\circ\text{C}$	$I_o$		50		Amps
Repetitive peak reverse surge current $T_c=80\text{m sec duty cycle } < 1\%$	$I_{RSM}$		50		Amps
Breakdown voltage ( $V_b$ ) @ $I=100\text{mA}, T_c=25^\circ\text{C}$ $I=90\text{Amp}, T_c=150^\circ\text{C}, PW=80\text{usec}$	$V_{bd}$ $V_{bb}$	24	25/27	32 40	Volts
Forward voltage drop ( $V_f$ ) @ $I=100\text{Amp}, t<300\text{usec}$	$V_f$	0.98	1.05	1.08	Volts
Peak forward surge current	$I_{FSM}$		600		Ampes
Reverse leakage ( $V_g=20\text{Vdc}$ ) $T_A=25^\circ\text{C}$	$I_R$	0.2	1.0	2.0	uA
Operating junction and storage temperature range	$T_j, T_{sto}$		-65 to +175		°C

**Notes:** 1. Enough heatsink must be considered in application.

