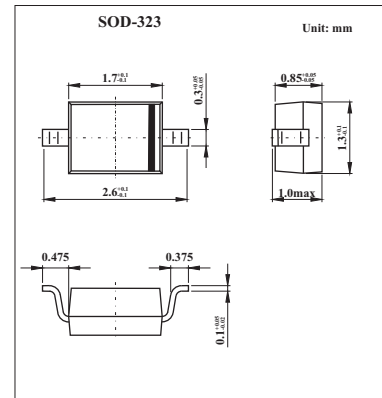


## Surface Mount Zener Diode

## MM3Z24VS

## ■ Features

- Planar Die Construction
- Ultra-Small Surface Mount Package
- Ideally Suited for Automated Assembly Processes

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Rating	Unit
Power Dissipation (Note 1)	$P_D$	200	mW
Forward Voltage @ $I_F = 10\text{mA}$	$V_F$	0.9	V
Thermal Resistance, Junction to Ambient Air (Note 1)	$R_{\theta JA}$	625	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_j, T_{STG}$	-65 to +150	$^\circ\text{C}$

Note: 1. Part mounted on FR-4 PC board with recommended pad layout.

■ Electrical Characteristics @  $T_a = 25^\circ\text{C}$  unless otherwise specified

Type Number	Zener Voltage Range (Note 2)				Maximum Zener Impedance (Note 3)			Maximum Reverse Current (Note 2)		Typical Temperature Coefficient @ $I_{ZT}$ $\text{mV}/^\circ\text{C}$	
	$V_Z @ I_{ZT}$			$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	$I_{ZK}$	$I_R @ V_R$		Min	Max
	Min (V)	Nom (V)	Max (V)	mA	$\Omega$	mA	$\mu\text{A}$	V			
MM3Z24VS	22.8	24	25.6	5	70	120	0.5	0.05	16.8	18.4	22

Notes: 2. Short duration test pulse used to minimize self-heating effect.

3.  $f = 1\text{kHz}$ .

## ■ Marking

Marking	2N
---------	----

# MM3Z24VS

■ Typical Characteristics

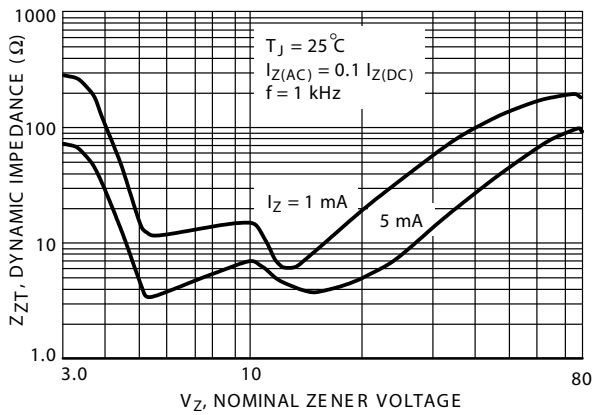


Fig.1 Effect of Zener Voltage on Zener Impedance

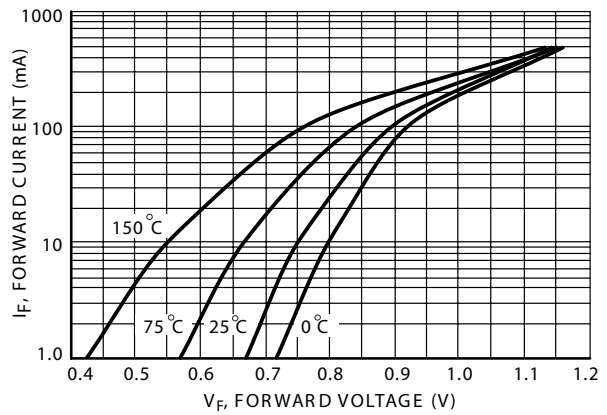


Fig.2 Typical Forward Voltage

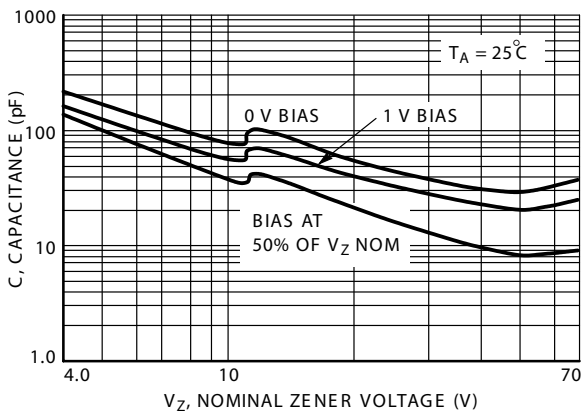


Fig.3 Typical Capacitance

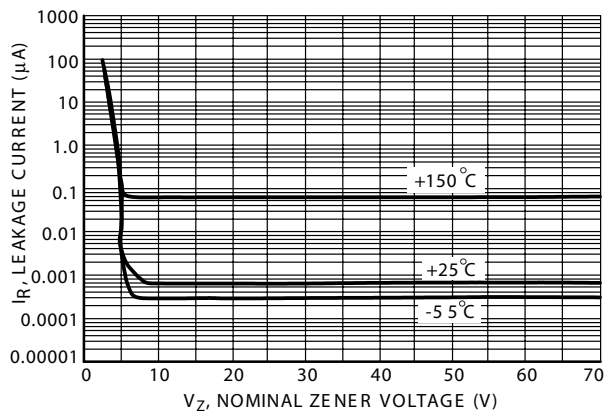


Fig.4 Typical Leakage Current

### MM3Z24VS

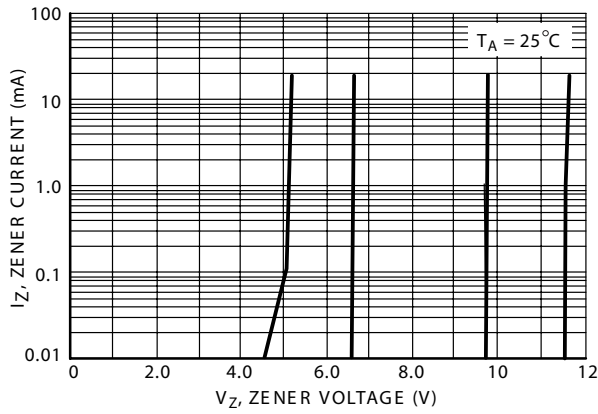


Fig.5 Zener Voltage versus Zener Current  
(V<sub>Z</sub> Up to 12 V)

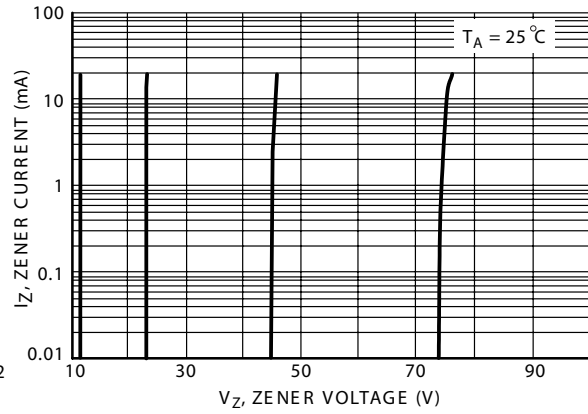


Fig.6 Zener Voltage versus Zener Current  
(12 V to 75 V)

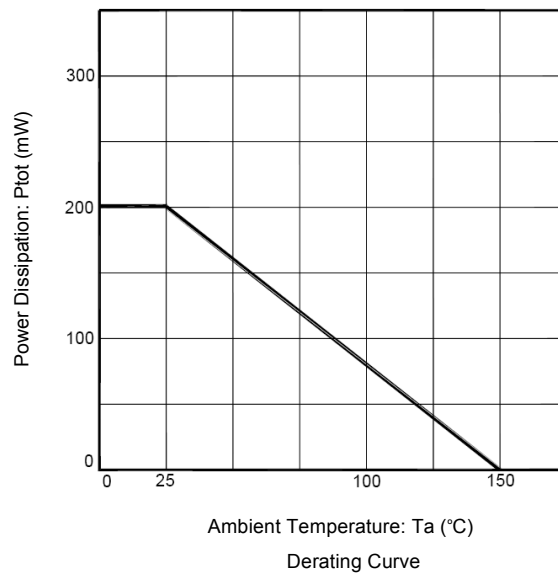


Fig.7 Power Dissipation VS Ambient Temperature