



P-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

FEATURES

- -30V, -4.9A , $R_{DS(ON)} = 52m\Omega$ @ $V_{GS} = -10V$.
 - $R_{DS(ON)} = 65m\Omega$ @ $V_{GS} = -4.5V$.
 - $R_{DS(ON)} = 119m\Omega$ @ $V_{GS} = -2.5V$.
- High dense cell design for extremely low $R_{DS(ON)}$.
- Rugged and reliable.
- Lead free product is acquired.
- TSOP-6 package.

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ C$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current-Continuous	I_D	-4.9	A
Drain Current-Pulsed ^a	I_{DM}	-20	A
Maximum Power Dissipation	P_D	2.0	W
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 150	°C

Thermal Characteristics







Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient ^b	$R_{\theta JA}$	62.5	°C/W



CEH2305

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = -250\mu\text{A}$	-30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = -30\text{V}, V_{\text{GS}} = 0\text{V}$			-1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 12\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -12\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
On Characteristics^c						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = -250\mu\text{A}$	-0.7		-1.3	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = -10\text{V}, I_D = -4.9\text{A}$		42	52	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5\text{V}, I_D = -2.2\text{A}$		54	65	$\text{m}\Omega$
		$V_{\text{GS}} = -2.5\text{V}, I_D = -1.2\text{A}$		82	119	$\text{m}\Omega$
Dynamic Characteristics^d						
Input Capacitance	C_{iss}	$V_{\text{DS}} = -15\text{V}, V_{\text{GS}} = 0\text{V},$ $f = 1.0 \text{ MHz}$		945		pF
Output Capacitance	C_{oss}			120		pF
Reverse Transfer Capacitance	C_{rss}			80		pF
Switching Characteristics^d						
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = -15\text{V}, I_D = -4.0\text{A}, \square$ $V_{\text{GS}} = -10\text{V}, R_{\text{GEN}} = 6\Omega$		9		ns
Turn-On Rise Time	t_r			3		ns
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$			66		ns
Turn-Off Fall Time	t_f			16		ns
Total Gate Charge	Q_g			9		nC
Gate-Source Charge	Q_{gs}			1		nC
Gate-Drain Charge	Q_{gd}			3		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current ^b	I_S				-4.9	A
Drain-Source Diode Forward Voltage ^c	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = -1\text{A}$			-1	V
Notes : a.Repetitive Rating : Pulse width limited by maximum junction temperature. b.Surface Mounted on FR4 Board, $t < 5 \text{ sec.}$ c.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$. d.Guaranteed by design, not subject to production testing. \square						

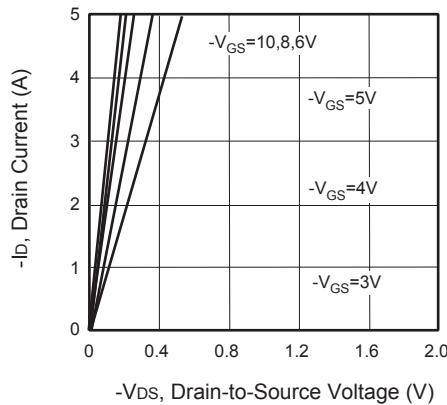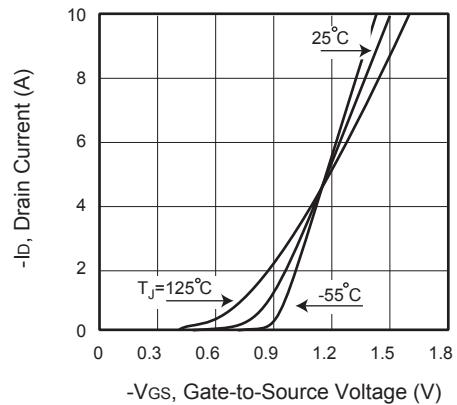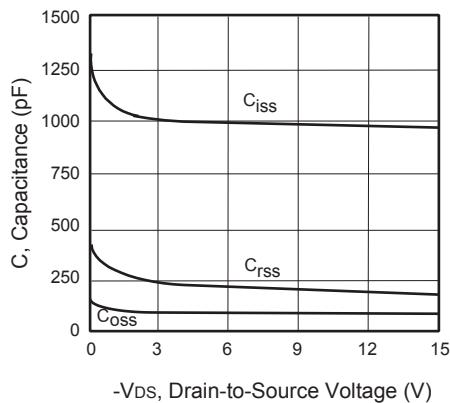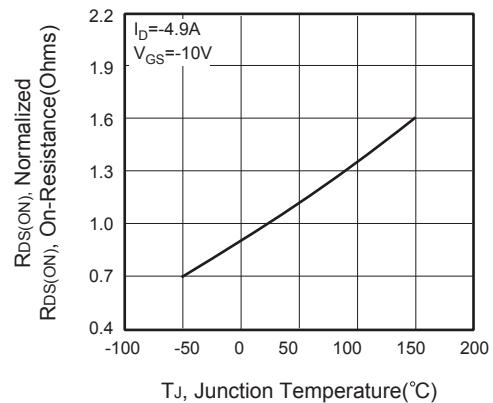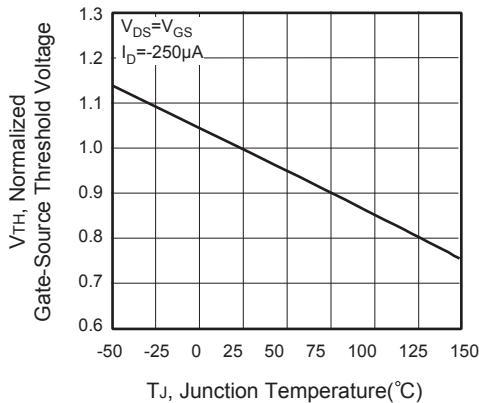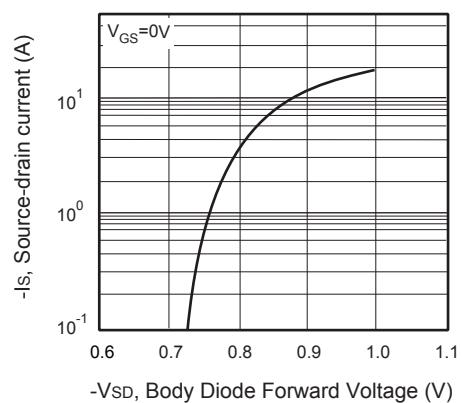**Figure 1. Output Characteristics****Figure 2. Transfer Characteristics****Figure 3. Capacitance****Figure 4. On-Resistance Variation with Temperature****Figure 5. Gate Threshold Variation with Temperature****Figure 6. Body Diode Forward Voltage Variation with Source Current**

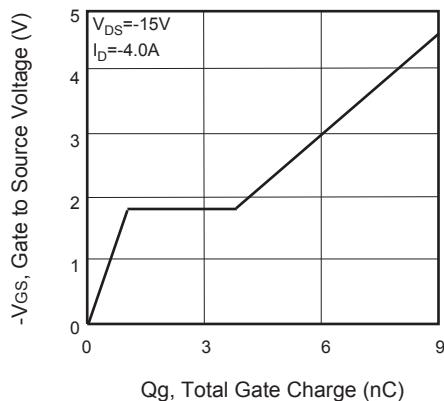


Figure 7. Gate Charge

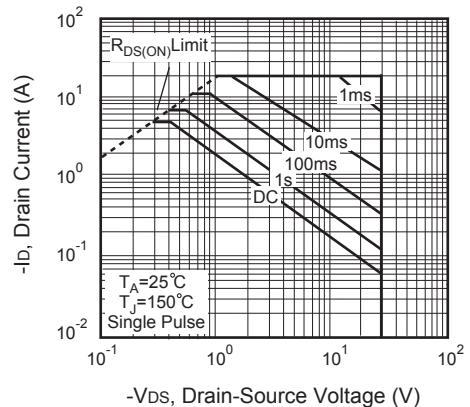


Figure 8. Maximum Safe Operating Area

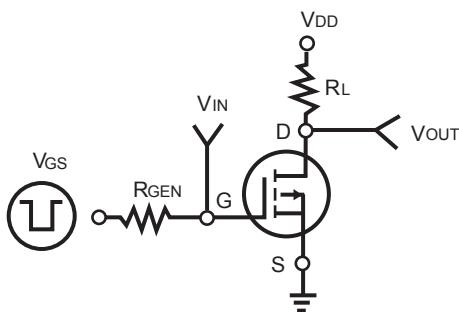


Figure 9. Switching Test Circuit

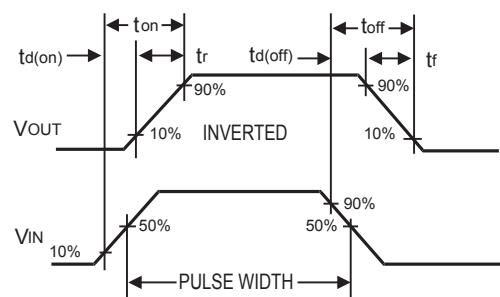


Figure 10. Switching Waveforms

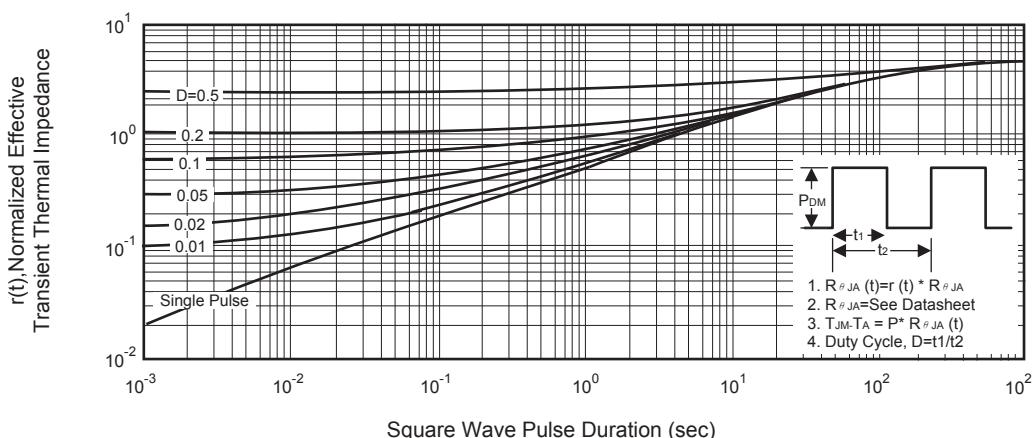


Figure 11. Normalized Thermal Transient Impedance Curve