



Dual P-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

FEATURES

- -60V, -3.8A, $R_{DS(ON)} = 86m\Omega$ @ $V_{GS} = -10V$.
- $R_{DS(ON)} = 125m\Omega$ @ $V_{GS} = -4.5V$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handing capability.
- Lead free product is acquired.
- Surface mount Package.

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ C$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	-3.8	A
Drain Current-Pulsed ^a	I_{DM}	-15.2	A
Maximum Power Dissipation	P_D	2.0	W
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 150	$^\circ C$

Thermal Characteristics







Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient ^b	$R_{\theta JA}$	62.5	$^\circ C/W$

**CEM6607****Electrical Characteristics** $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = -250\mu\text{A}$	-60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = -60\text{V}, V_{\text{GS}} = 0\text{V}$			-1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
On Characteristics^c						
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = -250\mu\text{A}$	-1		-3	V
Static Drain-Source On-Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = -10\text{V}, I_D = -3.8\text{A}$		70	86	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5\text{V}, I_D = -3\text{A}$		95	125	$\text{m}\Omega$
Dynamic Characteristics^d						
Input Capacitance	C_{iss}	$V_{\text{DS}} = -30\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		1135		pF
Output Capacitance	C_{oss}			95		pF
Reverse Transfer Capacitance	C_{rss}			60		pF
Switching Characteristics^d						
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{DD}} = -30\text{V}, I_D = -1\text{A}, V_{\text{GS}} = -10\text{V}, R_{\text{GEN}} = 6\Omega$		13	26	ns
Turn-On Rise Time	t_r			4	8	ns
Turn-Off Delay Time	$t_{\text{d(off)}}$			45	90	ns
Turn-Off Fall Time	t_f			6	12	ns
Total Gate Charge	Q_g	$V_{\text{DS}} = -30\text{V}, I_D = -3.5\text{A}, V_{\text{GS}} = -10\text{V}$		22.6	29.4	nC
Gate-Source Charge	Q_{gs}			2.4		nC
Gate-Drain Charge	Q_{gd}			5.7		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current ^b	I_S				-1.5	A
Drain-Source Diode Forward Voltage ^c	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = -1.5\text{A}$			-1.2	V

Notes :

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.
- b.Surface Mounted on FR4 Board, t ≤ 10 sec.
- c.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
- d.Guaranteed by design, not subject to production testing.

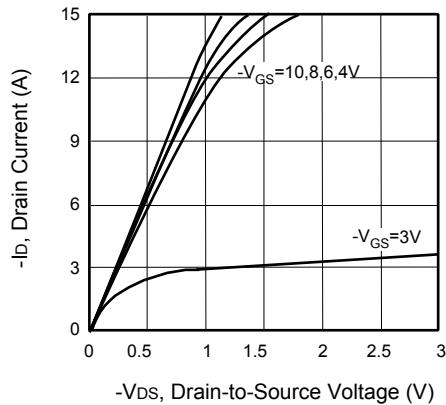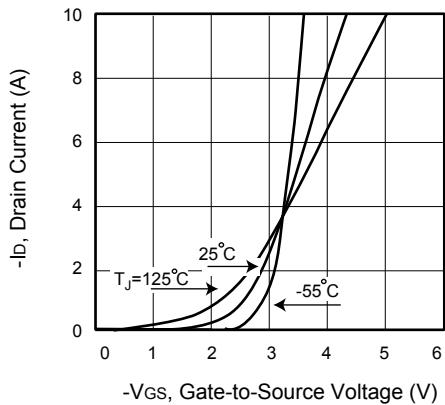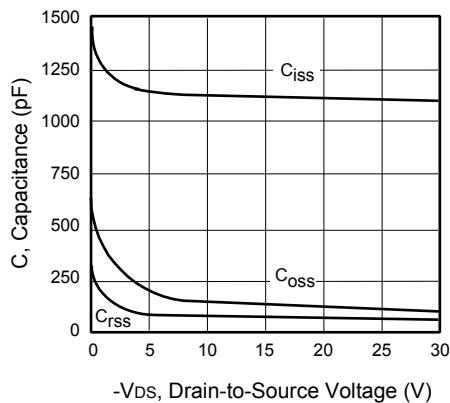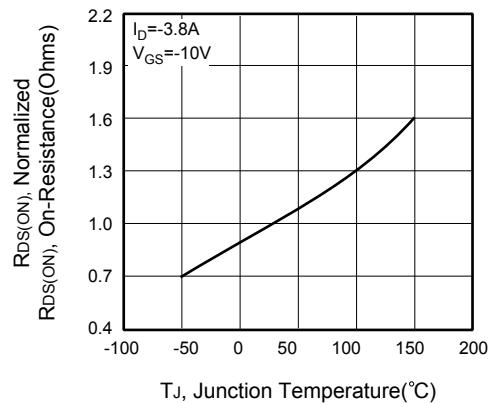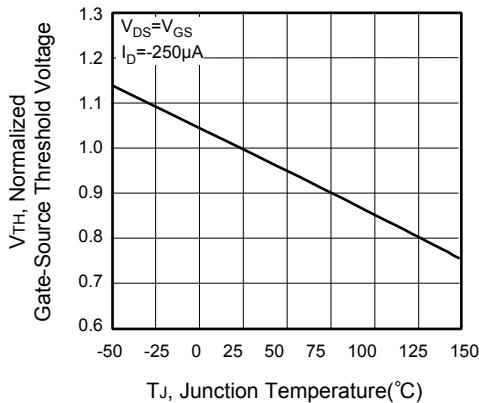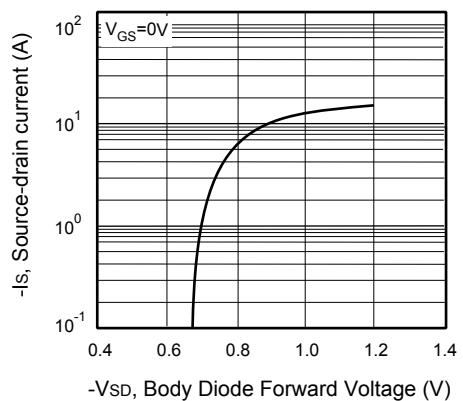**Figure 1. Output Characteristics****Figure 2. Transfer Characteristics****Figure 3. Capacitance****Figure 4. On-Resistance Variation with Temperature****Figure 5. Gate Threshold Variation with Temperature****Figure 6. Body Diode Forward Voltage Variation with Source Current**



CEM6607

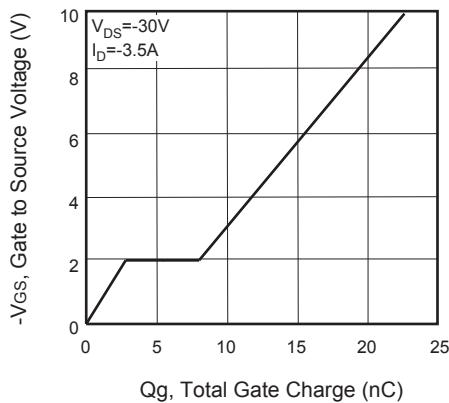


Figure 7. Gate Charge

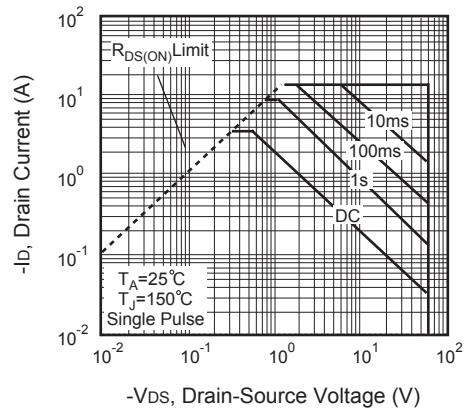


Figure 8. Maximum Safe Operating Area

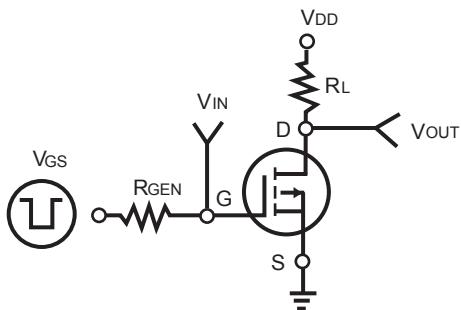


Figure 9. Switching Test Circuit

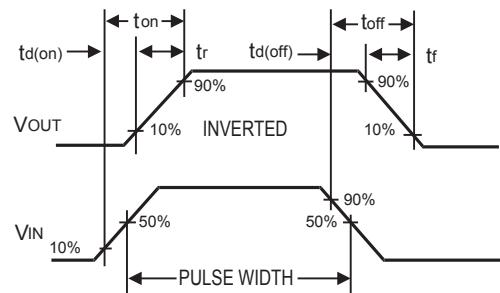


Figure 10. Switching Waveforms

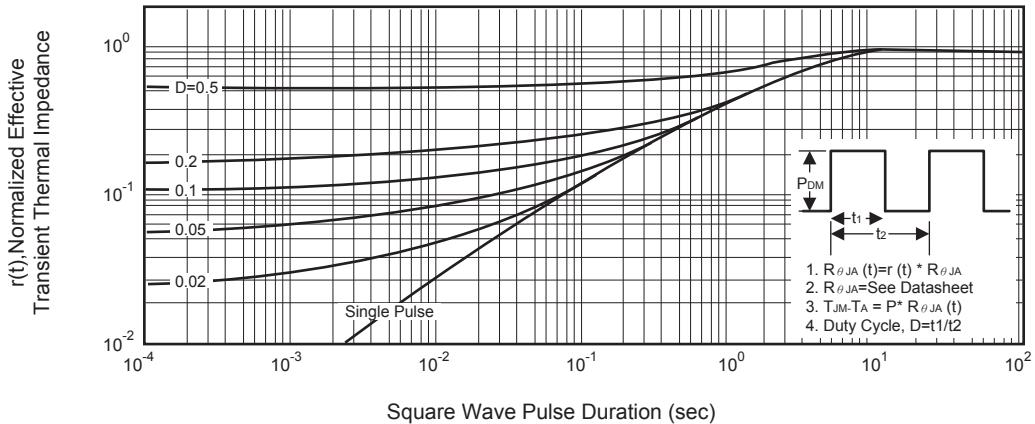


Figure 11. Normalized Thermal Transient Impedance Curve