


Variable Capacitance Diode

General Description

- For FM tuner
- Monolithic chip with common cathode for perfect tacking of both diodes
- Uniform "square law" characteristics
- Ideal hifi tuning device when used in low-distortion, back-to-back configuration



SOT-23


Features and Benefits

- Low series resistance
: $r_s=0.3\Omega$ (Typ.)
- Full lead (Pb)-free device and RoHS compliant device

Ordering Information

Part Number	Marking Code	Package	Packaging
SDV703WK	DV3□	SOT-23	Tape & Reel



Marking Information



DV3 = Specific Device Code

□ = C_{T2V} rank (Grade)

Pinning Information

Pin	Description	Simplified Outline	Graphic Symbol
1	Anode		
2	Anode		
3	Cathode		

Absolute Maximum Ratings ($T_{amb}=25^{\circ}\text{C}$, Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Reverse voltage	V_R	15	V
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55 ~ 150	

Electrical Characteristics ($T_{amb}=25^{\circ}\text{C}$, Unless otherwise specified)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse voltage	V_R	$I_R=10\mu\text{A}$	15	-	-	V
Reverse current	I_R	$V_R=15\text{V}$	-	-	50	nA
Diode capacitance	C_{T2V}^*	$V_R=2\text{V}, f=1\text{MHz}$	42.0	-	47.5	pF
	C_{T8V}	$V_R=8\text{V}, f=1\text{MHz}$	24.0	-	28.8	
Capacitance ratio	C_{T2V}/C_{T8V}	-	1.65	1.71	1.80	-
Series resistance	r_s	$C_T=38\text{pF}, f=100\text{MHz}$	-	0.3	0.4	Ω

* : C_{T2V} / A : 42~43.5pF, B : 43~44.5pF, C : 44~45.5pF, D : 45~46.5pF, E : 46~47.5pF

Rating and Characteristic Curves

Fig. 1) $C_T - V_R$




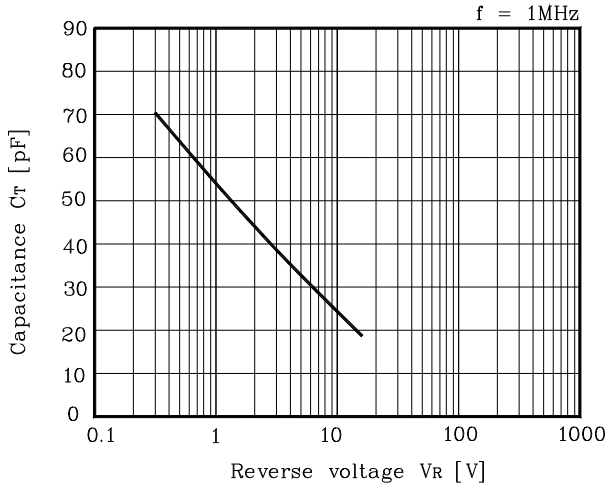


Fig. 2) $(C_{Tref}/C_T) - V_R$

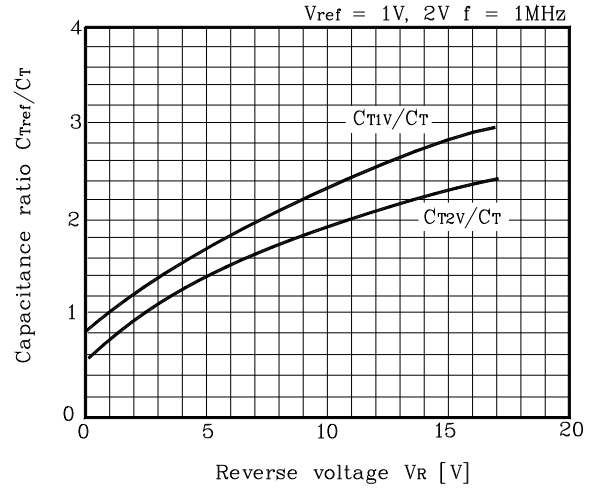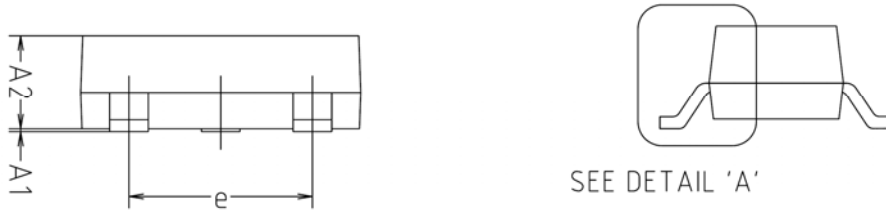


Package Outline Dimensions (Unit: mm)

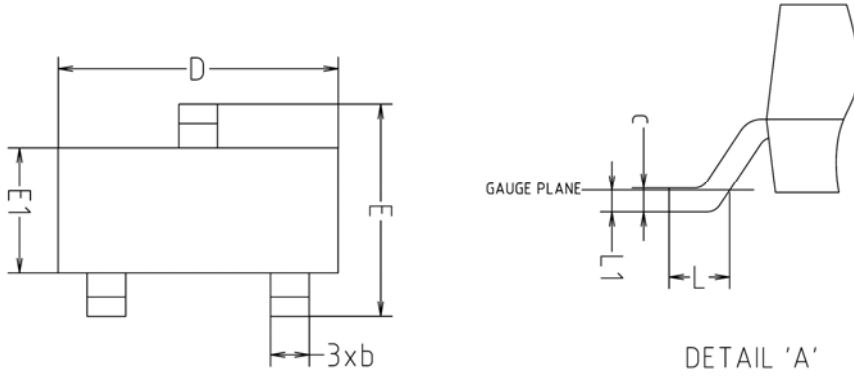

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A1	0.00	-	0.10	
A2	0.82	-	1.02	
b	0.39	0.42	0.45	
c	0.09	0.12	0.15	
D	2.80	2.90	3.00	
E	2.20	2.40	2.60	
E1	1.20	1.30	1.40	
e	1.90BSC			
L	0.20	-	-	
L1	0.12BSC			

※ Recommend PCB solder land (Unit: mm)

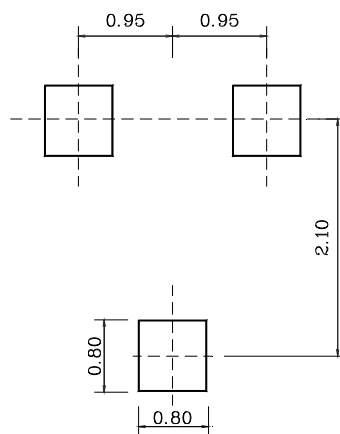

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.